
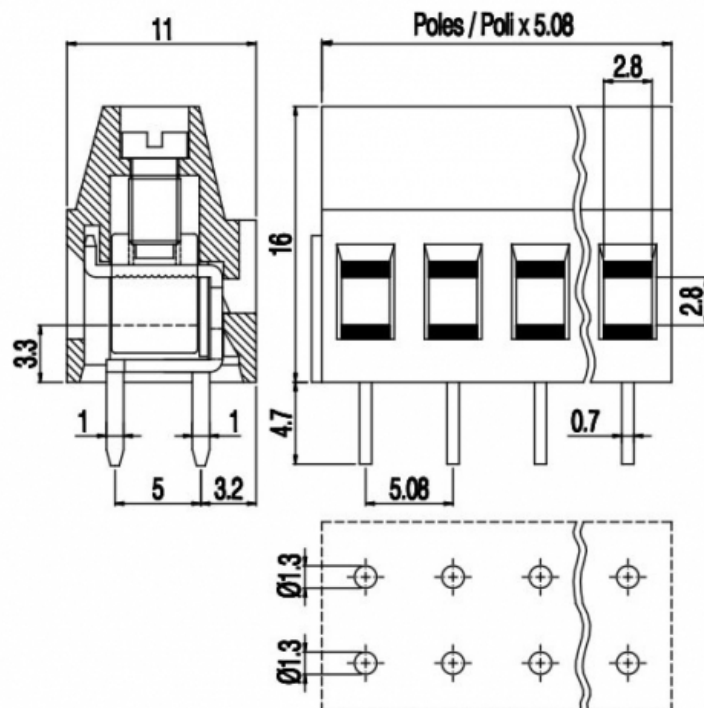


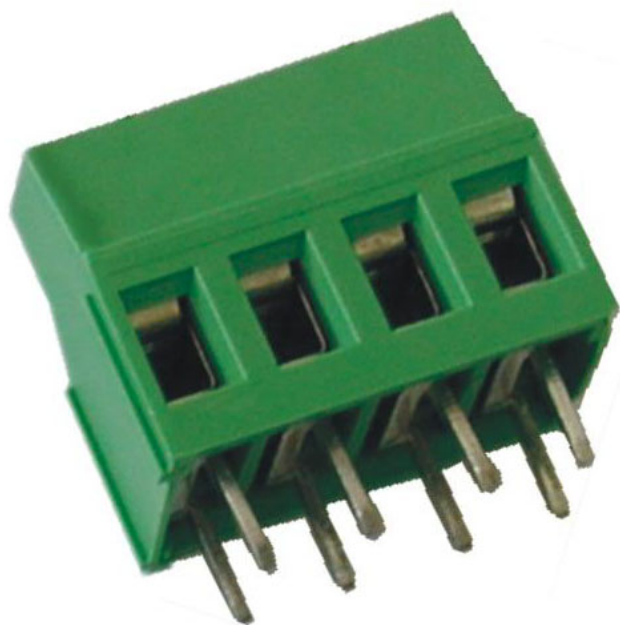

Single-deck terminal block - Double pin - Modular version - Pitch 5,08mm - 2/3/4/8 poles

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	16,00 mm
housing depth:	11 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.8 × 2.8 mm
wire stripping:	max 8 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
recommended torque:	0.8÷0.88 Nm / 7.2÷7.9 in.lbs

APPROVALS DATA



EN 60998-1

current:	24A
voltage:	250V
wire section:	2.5mm ²
torque:	0.8Nm
FILE:	CA02.00599

-
-
-
-
-

UL 1059
18A factory / 15A field
300V
14÷30AWG
4.5Lb-in
E178356

ADDITIONAL INFORMATION

SCIP NUMBER:

2ac6f6ad-4e84-41b5-a9bc-100a23dd428c

MATERIALS

housing: PA - UL 94 V0
screw: Galvanized steel
clamp/spring: Nickeled copper alloy
terminal: Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MV25D2-5,08-V	N/A	N/A	N/A
3	MV25D3-5,08-V	N/A	N/A	N/A
4	MV25D4-5,08-V	N/A	N/A	N/A
8	MV25D8-5,08-V	N/A	N/A	N/A
..	MV25D..-5,08-V	N/A	N/A	N/A