
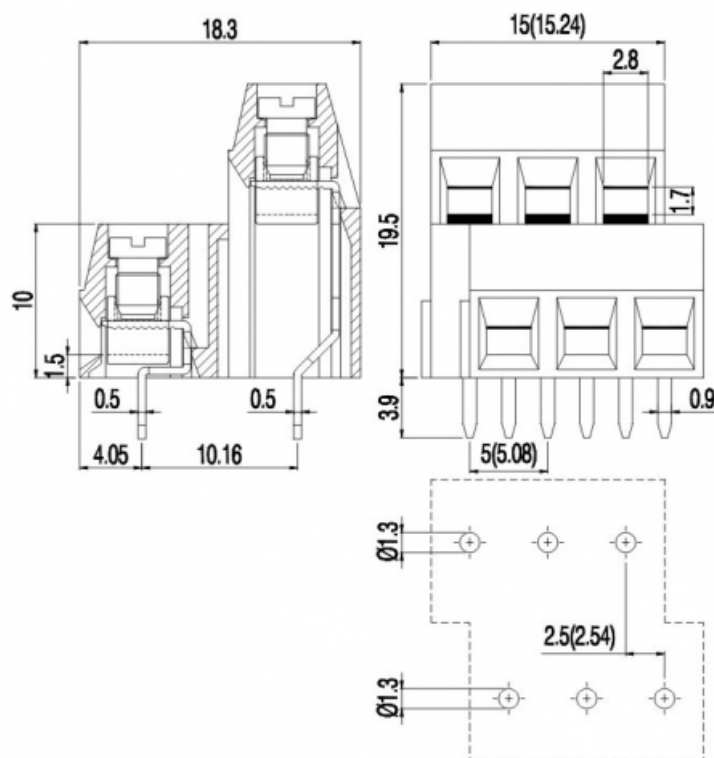


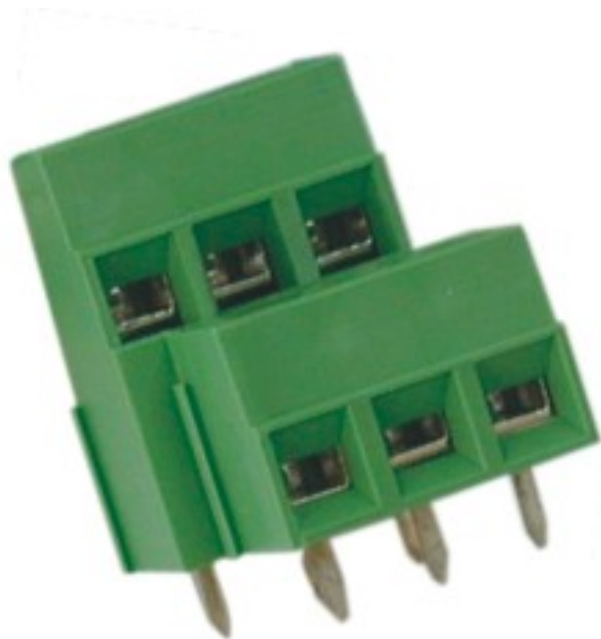

Multi-deck terminal block - Modular version - Pitch 5.08mm - 2÷3 poles

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	19,50 mm
housing depth:	18.3 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	2.8 × 1.7 mm
wire stripping:	max 6 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	13.5A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
recommended torque:	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



current:

-

-

 UL 1059
 13.5A factory / 10A field

voltage:

-

-

300V

wire section:

-

-

16÷30AWG

torque:

-

-

4.5Lb-in

ADDITIONAL INFORMATION

SCIP NUMBER: d0ac85a5-a74a-41e4-ac05-3977aee87aff

MATERIALS

housing: PA - UL 94 V0
 screw: Galvanized steel
 clamp/spring: Nickeled copper alloy
 terminal: Tin-plated copper alloy

AVAILABLE COLOURS

 (STD)      

other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVD152-5,08-V	N/A	N/A	N/A
3	MVD153-5,08-V	N/A	N/A	N/A
..	MVD15..-5,08-V	N/A	N/A	N/A