


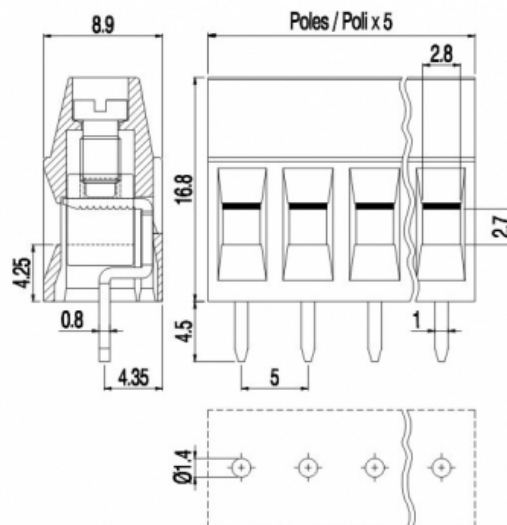

Version with antirotation pegs is available on 2 poles connections.
Disponibile per connessioni a 2 poli versioni con perni antitorsione.

Single-deck terminal block - Stackable version - Pitch 5mm - 2÷12 poles

GENERAL INFORMATION

pitch:	5 mm
housing height:	16,80 mm
housing depth:	8.9 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.8 × 2.7 mm
wire stripping:	max 7 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	16A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
recommended torque:	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



EN 60998-1

current:	16A
voltage:	450V
wire section:	2.5mm ²
torque:	0.5Nm
FILE:	EP149



EN 60998-1

16A
450V
2.5mm ²
4.5Nm
40023956



UL 1059

16A factory / 15A field
300V
14÷30AWG
4.5Lb-in
E178356

ADDITIONAL INFORMATION

MATERIALS

housing: PA - UL 94 V0
 screw: Galvanized steel
 clamp/spring: Nickeled copper alloy
 terminal: Tin-plated copper alloy

AVAILABLE COLOURS

other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVE252-5-V-L	N/A	N/A	N/A
3	MVE253-5-V-L	N/A	N/A	N/A
4	MVE254-5-V-L	N/A	N/A	N/A
5	MVE255-5-V-L	N/A	N/A	N/A
6	MVE256-5-V-L	N/A	N/A	N/A
7	MVE257-5-V-L	N/A	N/A	N/A
8	MVE258-5-V-L	N/A	N/A	N/A
9	MVE259-5-V-L	N/A	N/A	N/A
10	MVE2510-5-V-L	N/A	N/A	N/A
11	MVE2511-5-V-L	N/A	N/A	N/A
12	MVE2512-5-V-L	N/A	N/A	N/A