
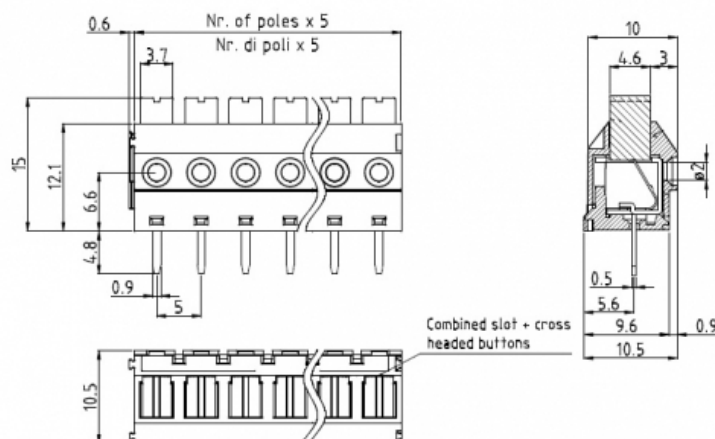


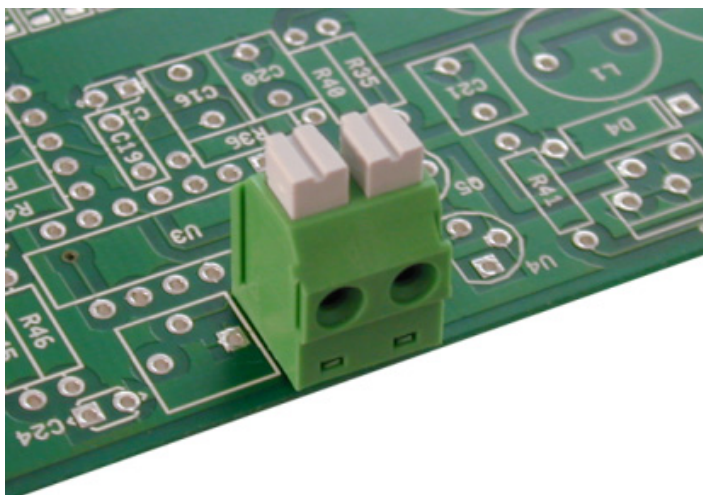

Screwless terminal block - Modular version - Pitch 5mm - 2÷6 poles

GENERAL INFORMATION

pitch:	5 mm
housing height:	15,00 mm
housing depth:	10.5 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	1.5 × 1.5 mm
wire stripping:	10 ÷ 11 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	10A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

spring releasing:	0.6 x 3.5mm
-	-

APPROVALS DATA



	-	-	UL 1059
current:	-	-	8A factory / 8A field
voltage:	-	-	300V
wire section:	-	-	16÷30AWG
torque:	-	-	-
FILE:	-	-	E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	MVEM502-5-V	N/A	N/A	N/A

03	MVEM503-5-V	N/A	N/A	N/A
04	MVEM504-5-V	N/A	N/A	N/A
05	MVEM505-5-V	N/A	N/A	N/A
06	MVEM506-5-V	N/A	N/A	N/A