


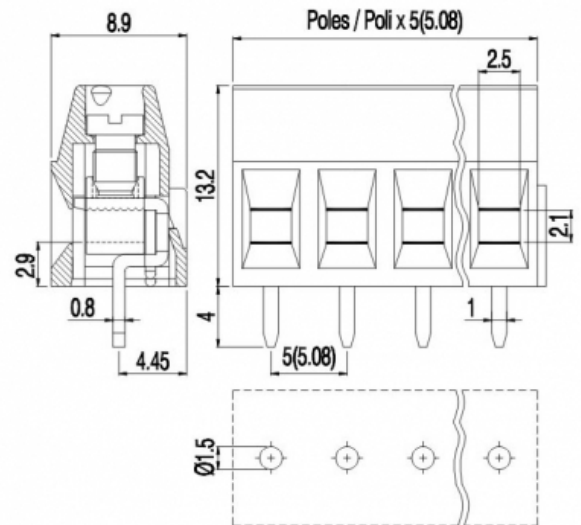

Version with antirotation pegs is available on 2 poles connections.
Disponibile per connessioni a 2 poli versioni con perni antitorsione.

Single-deck terminal block - Modular version - Pitch 5mm - 2÷12 poles

GENERAL INFORMATION

pitch:	5 mm
housing height:	13,20 mm
housing depth:	8.9 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	2.5 × 2.1 mm
wire stripping:	max 7 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	17.5A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
recommended torque:	0.5÷0.55 Nm / 4.5÷4.9 in.lbs

APPROVALS DATA



EN 60998-1



-



UL 1059

current: 17.5A

-

17.5A factory / 10A field

voltage: 450V

-

300V

wire section: 1.5mm²

-

16÷30AWG

torque:	0.5Nm	-	4.5Lb-in
FILE:	CA02.00598	-	E178356

ADDITIONAL INFORMATION

SCIP NUMBER: 713ad43e-8dff-4607-9cfa-843d4a730153

MATERIALS

housing: PA - UL 94 V0
 screw: Galvanized steel
 clamp/spring: Nickeled copper alloy
 terminal: Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVS152-5-V	N/A	N/A	N/A
3	MVS153-5-V	N/A	N/A	N/A
4	MVS154-5-V	N/A	N/A	N/A
5	MVS155-5-V	N/A	N/A	N/A
6	MVS156-5-V	N/A	N/A	N/A
7	MVS157-5-V	N/A	N/A	N/A
8	MVS158-5-V	N/A	N/A	N/A
9	MVS159-5-V	N/A	N/A	N/A
10	MVS1510-5-V	N/A	N/A	N/A
11	MVS1511-5-V	N/A	N/A	N/A
12	MVS1512-5-V	N/A	N/A	N/A
..	MVS15..-5-V	N/A	N/A	N/A