


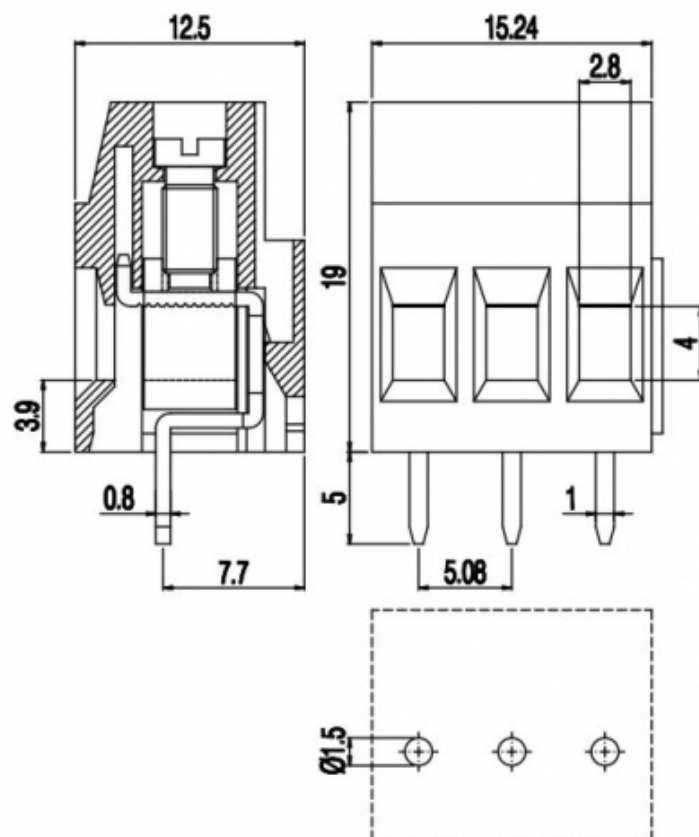

Single-deck terminal block - Modular version - Pitch 5,08mm - 2÷3 poles

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	19,00 mm
housing depth:	12.5 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.8 × 4 mm
wire stripping:	max 9.5 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	24A
voltage:	450V
test voltage:	2.5 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
recommended torque:	0.8÷0.88 Nm / 7.2÷7.9 in.lbs

APPROVALS DATA



EN 60998-1

current:	24A
voltage:	450V



-
-
-



UL 1059
18A factory / 15A field
300V

wire section:	2.5mm ²	-	14÷30AWG
torque:	0.8Nm	-	4.5Lb-in
FILE:	CA02.00599	-	E178356

ADDITIONAL INFORMATION

SCIP NUMBER: 4857c4e6-479f-4765-acd0-7361f5cc6333

MATERIALS

housing: PA - UL 94 V0
 screw: Galvanized steel
 clamp/spring: Nickeled copper alloy
 terminal: Tin-plated copper alloy

AVAILABLE COLOURS

GN (STD) GY BK BL RD YL OG

other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVSP252-5,08-V	N/A	N/A	N/A
3	MVSP253-5,08-V	N/A	N/A	N/A
..	MVSP25..-5,08-V	N/A	N/A	N/A