




## SEB 2600 G M4 rot/red

Industrial Connectors:Measuring and Testing Equipment:Sockets:4 mm safety system

### Product description

|                      |                                                                                                                                                                                                                                                                                                      |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description          | Safety built-in socket, 4 mm diameter, touch-protected, M 4 threaded connection and soldering hole, gold-plated brass. For installation into switchpanels and equipment chassis with wall thicknesses up to 6 mm. Accessory BES 1000. Installation hole: 12.2 mm diameter. Tightening torque: 50 Ncm |
| Type                 | SEB 2600 G M4 rot/red                                                                                                                                                                                                                                                                                |
| Order No.            | 972 354-101                                                                                                                                                                                                                                                                                          |
| System               | 4 mm safety system                                                                                                                                                                                                                                                                                   |
| Housing Color        | red                                                                                                                                                                                                                                                                                                  |
| Other standard types | black color,<br>order no. 972 354-100;<br>blue color,<br>order no. 972 354-102;<br>yellow color,<br>order no. 972 354-103;<br>green color,<br>order no. 972 354-104;<br>yellow/green color,<br>order no. 972 354-188                                                                                 |

### Drawing

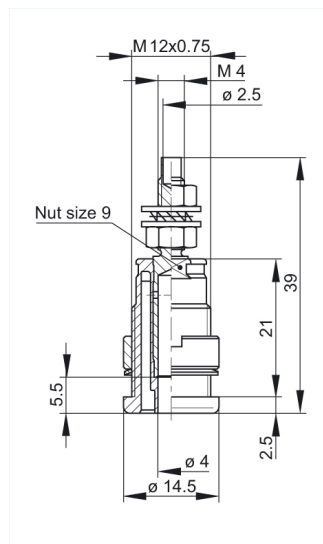

### Technical data

|                      |                |
|----------------------|----------------|
| Type of contact      | socket         |
| Type of termination  | screw / solder |
| Standard             | IEC 61010      |
| Rated voltage        | AC/DC 1000 V   |
| Measurement Category | CAT II         |
| Rated current        | 32 A           |
| Contact resistance   | 5 mOhm         |

|                                 |                |
|---------------------------------|----------------|
| Mounting                        | screw          |
| <b>Material</b>                 |                |
| Contact material                | brass          |
| Contact surface material        | gold-plated    |
| Housing material                | PA             |
| <b>Environmental conditions</b> |                |
| Temperature range               | -40°C to +80°C |
| <b>Inflammability class</b>     |                |
| Housing                         | 94 V-2         |