


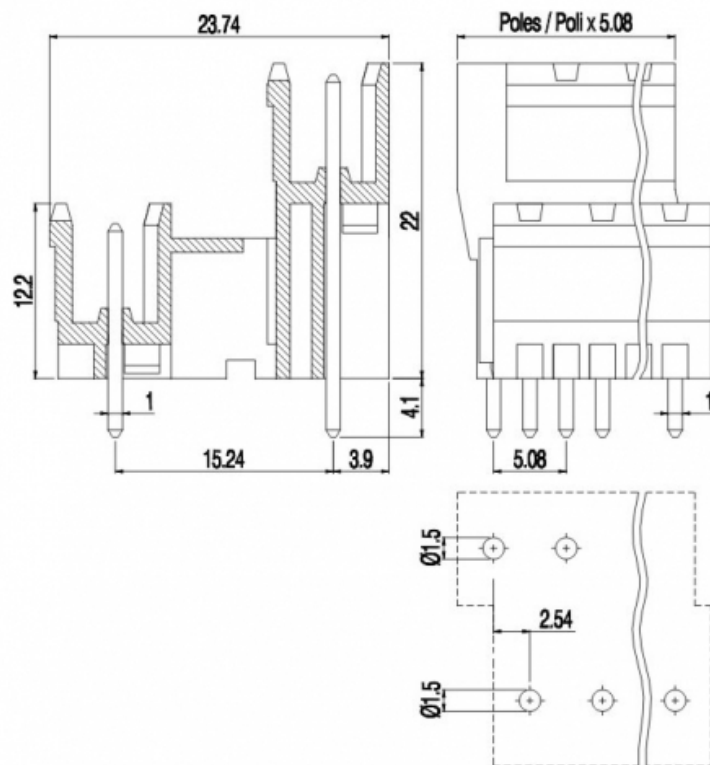

Male plug-in connector - Vertical - Dual row - Staggered - Modular version - Pitch 5,08mm - 02÷03 poles

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	22,00 mm
housing depth:	23.74 mm
dimensional class:	medium
wire section:	-
clamp opening size:	-
wire stripping:	-
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	12A
voltage:	250V
impulse voltage:	4 kV

MECHANICAL CHARACTERISTICS

APPROVALS DATA



EN 61984

current:	12A
voltage:	250V
FILE:	CA02.04178



EN 61984

12A
250V
40005779



UL 1059

12A factory / 12A field
300V
E178356

MATERIALS

housing:	PA - UL 94 V0
----------	---------------

AVAILABLE COLOURS

screw: n/a **GN**^(STD) **GY** **BK** **BL** **RD** **YL** **OG**
 clamp/spring: n/a other colours: upon request
 terminal: Tin-plated copper alloy

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	PDSV02-5,08-V	N/A	N/A	N/A
03	PDSV03-5,08-V	N/A	N/A	N/A