


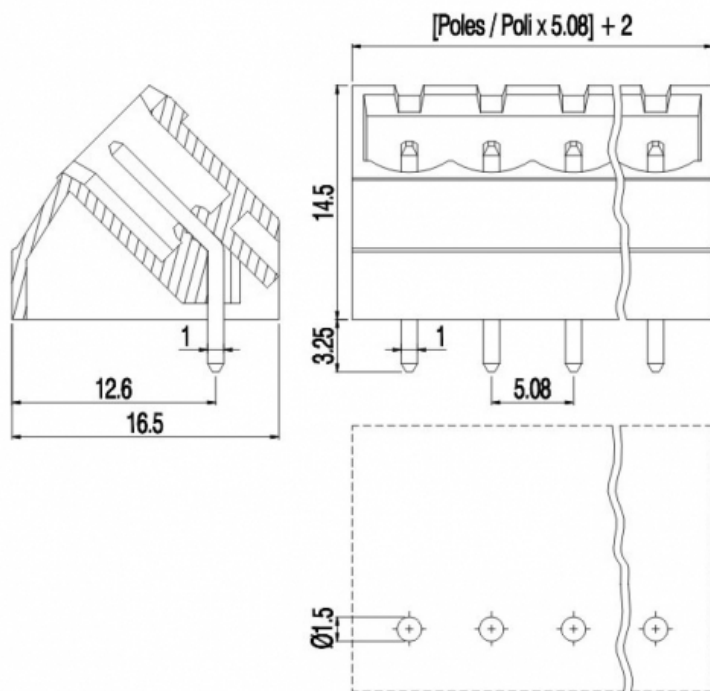

Male plug-in connector - with closed ends - 45° angled - Pitch 5,08mm - 02 ÷ 24 poles

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	14,50 mm
housing depth:	16.5 mm
dimensional class:	medium
wire section:	-
clamp opening size:	-
wire stripping:	-
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	12A
voltage:	250V
impulse voltage:	4 kV

MECHANICAL CHARACTERISTICS

APPROVALS DATA



EN 61984

current:	12A
voltage:	250V
FILE:	CA02.04178



-
-
-
-



UL 1059
12A factory / 12A field
300V
E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	n/a

AVAILABLE COLOURS



other colours: upon request

terminal:

Tin-plated copper alloy

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	PI02-5,08-IQ-P	N/A	N/A	N/A
03	PI03-5,08-IQ-P	N/A	N/A	N/A
04	PI04-5,08-IQ-P	N/A	N/A	N/A
05	PI05-5,08-IQ-P	N/A	N/A	N/A
06	PI06-5,08-IQ-P	N/A	N/A	N/A
07	PI07-5,08-IQ-P	N/A	N/A	N/A
08	PI08-5,08-IQ-P	N/A	N/A	N/A
09	PI09-5,08-IQ-P	N/A	N/A	N/A
10	PI10-5,08-IQ-P	N/A	N/A	N/A
11	PI11-5,08-IQ-P	N/A	N/A	N/A
12	PI12-5,08-IQ-P	N/A	N/A	N/A
13	PI13-5,08-IQ-P	N/A	N/A	N/A
14	PI14-5,08-IQ-P	N/A	N/A	N/A
15	PI15-5,08-IQ-P	N/A	N/A	N/A
16	PI16-5,08-IQ-P	N/A	N/A	N/A
17	PI17-5,08-IQ-P	N/A	N/A	N/A
18	PI18-5,08-IQ-P	N/A	N/A	N/A
19	PI19-5,08-IQ-P	N/A	N/A	N/A
20	PI20-5,08-IQ-P	N/A	N/A	N/A
21	PI21-5,08-IQ-P	N/A	N/A	N/A
22	PI22-5,08-IQ-P	N/A	N/A	N/A
23	PI23-5,08-IQ-P	N/A	N/A	N/A
24	PI24-5,08-IQ-P	N/A	N/A	N/A