
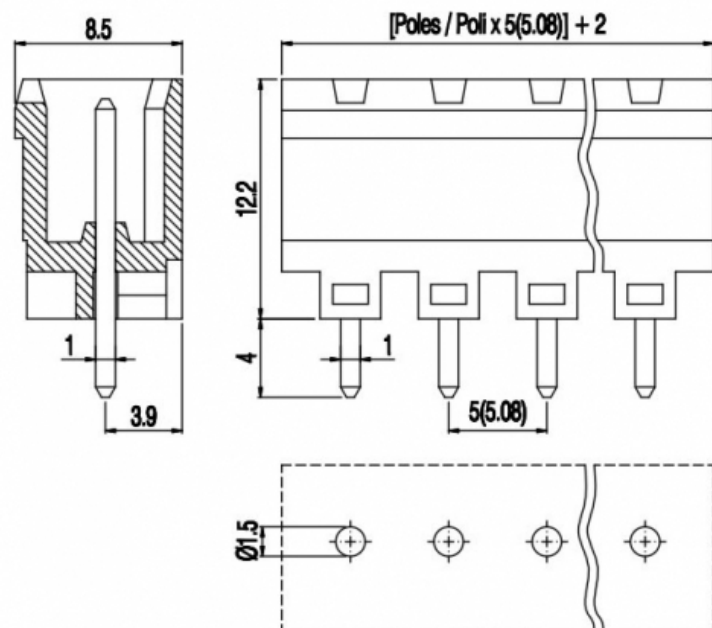


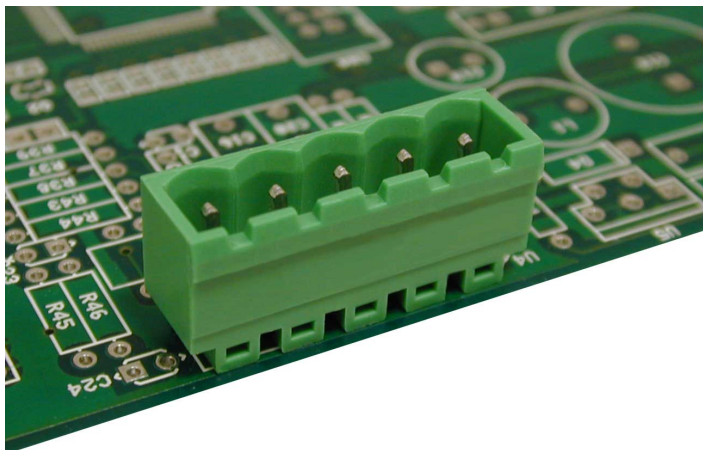

Male plug-in connector - with closed ends - Pitch 5mm - 02 ÷ 24 poles

GENERAL INFORMATION

pitch:	5 mm
housing height:	12,20 mm
housing depth:	8.5 mm
dimensional class:	medium
wire section:	-
clamp opening size:	-
wire stripping:	-
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	12A
voltage:	250V
impulse voltage:	4 kV

MECHANICAL CHARACTERISTICS

APPROVALS DATA



EN 61984

current:	12A
voltage:	250V
FILE:	CA02.04178



EN 61984

12A
250V
40005779



UL 1059

12A factory / 12A field
300V
E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	n/a
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	PV02-5-V-P	N/A	N/A	N/A
03	PV03-5-V-P	N/A	N/A	N/A
04	PV04-5-V-P	N/A	N/A	N/A
05	PV05-5-V-P	N/A	N/A	N/A
06	PV06-5-V-P	N/A	N/A	N/A
07	PV07-5-V-P	N/A	N/A	N/A
08	PV08-5-V-P	N/A	N/A	N/A
09	PV09-5-V-P	N/A	N/A	N/A
10	PV10-5-V-P	N/A	N/A	N/A
11	PV11-5-V-P	N/A	N/A	N/A
12	PV12-5-V-P	N/A	N/A	N/A
13	PV13-5-V-P	N/A	N/A	N/A
14	PV14-5-V-P	N/A	N/A	N/A
15	PV15-5-V-P	N/A	N/A	N/A
16	PV16-5-V-P	N/A	N/A	N/A
17	PV17-5-V-P	N/A	N/A	N/A
18	PV18-5-V-P	N/A	N/A	N/A
19	PV19-5-V-P	N/A	N/A	N/A
20	PV20-5-V-P	N/A	N/A	N/A
21	PV21-5-V-P	N/A	N/A	N/A
22	PV22-5-V-P	N/A	N/A	N/A
23	PV23-5-V-P	N/A	N/A	N/A
24	PV24-5-V-P	N/A	N/A	N/A