
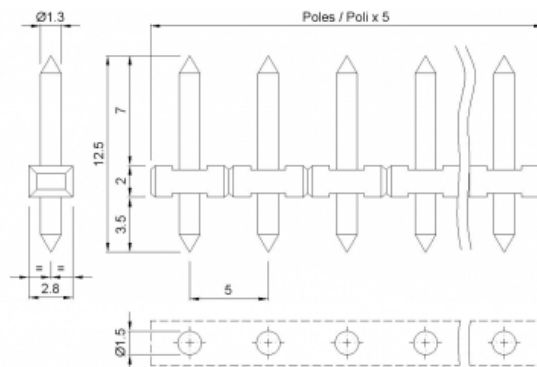


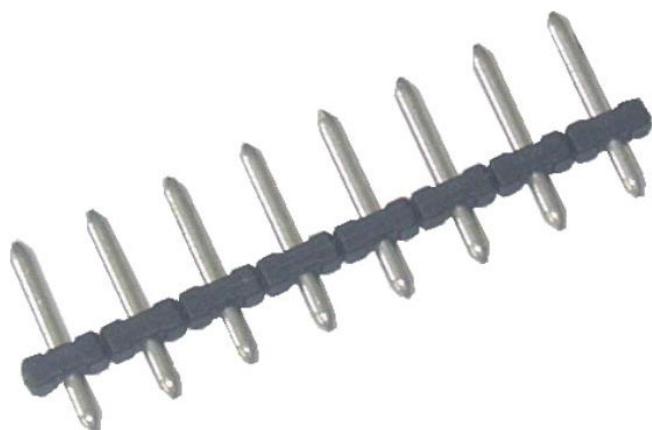

Male plug-in connector - Stackable version - Pitch 5mm - Poles 02÷24

GENERAL INFORMATION

pitch:	5 mm
housing height:	12,50 mm
housing depth:	2.8 mm
dimensional class:	slow
wire section:	-
clamp opening size:	-
wire stripping:	-
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	10A
voltage:	250V
impulse voltage:	4 kV

MECHANICAL CHARACTERISTICS

APPROVALS DATA



current:	-	-	UL 1059
voltage:	-	-	18A factory / 15A field
FILE:	-	-	300V
			E178356

ADDITIONAL INFORMATION

SCIP NUMBER:	e7871ea5-2cf8-4f17-b626-38a85b04faba
--------------	--------------------------------------

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	n/a
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours:	upon request
----------------	--------------

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	PVS02-5	N/A	N/A	N/A

03	PVS03-5	N/A	N/A	N/A
04	PVS04-5	N/A	N/A	N/A
05	PVS05-5	N/A	N/A	N/A
06	PVS06-5	N/A	N/A	N/A
07	PVS07-5	N/A	N/A	N/A
08	PVS08-5	N/A	N/A	N/A
09	PVS09-5	N/A	N/A	N/A
10	PVS10-5	N/A	N/A	N/A
11	PVS11-5	N/A	N/A	N/A
12	PVS12-5	N/A	N/A	N/A
13	PVS13-5	N/A	N/A	N/A
14	PVS14-5	N/A	N/A	N/A
15	PVS15-5	N/A	N/A	N/A
16	PVS16-5	N/A	N/A	N/A
17	PVS17-5	N/A	N/A	N/A
18	PVS18-5	N/A	N/A	N/A
19	PVS19-5	N/A	N/A	N/A
20	PVS20-5	N/A	N/A	N/A
21	PVS21-5	N/A	N/A	N/A
22	PVS22-5	N/A	N/A	N/A
23	PVS23-5	N/A	N/A	N/A
24	PVS24-5	N/A	N/A	N/A