


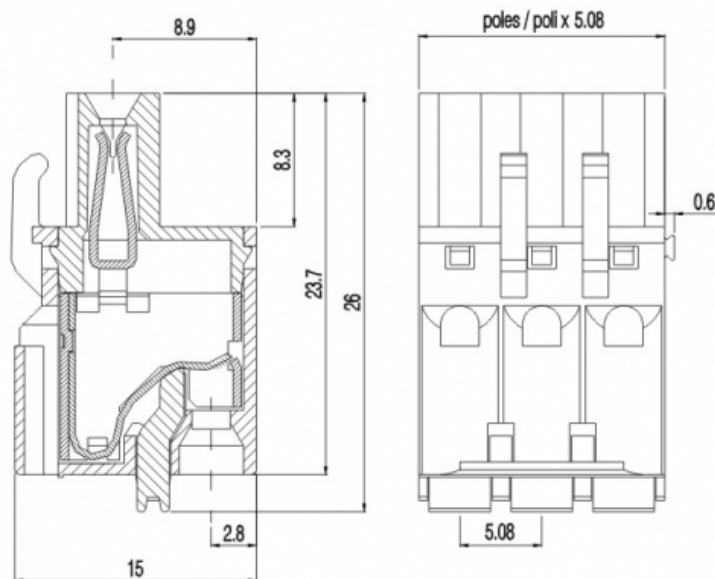

designed by
 **euroclamp**

Screwless plug-in connector - Modular version - Pitch 5,08mm - 02÷03 poles

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	15,00 mm
housing depth:	23.7 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	
wire stripping:	max 10 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	12A
voltage:	250V
impulse voltage:	4 kV

MECHANICAL CHARACTERISTICS

spring releasing:	0.6 x 3.5mm
-	-

APPROVALS DATA



	-	-	UL 1059
current:	-	-	16A factory / 16A field
voltage:	-	-	300V
wire section:	-	-	12÷30AWG
torque:	-	-	-
FILE:	-	-	E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a

AVAILABLE COLOURS



clamp/spring:
terminal:

Steel
Tin-plated copper alloy

other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	SHM02-5,08-M	N/A	N/A	N/A
03	SHM03-5,08-M	N/A	N/A	N/A
..	SHM..-5,08-M	N/A	N/A	N/A