


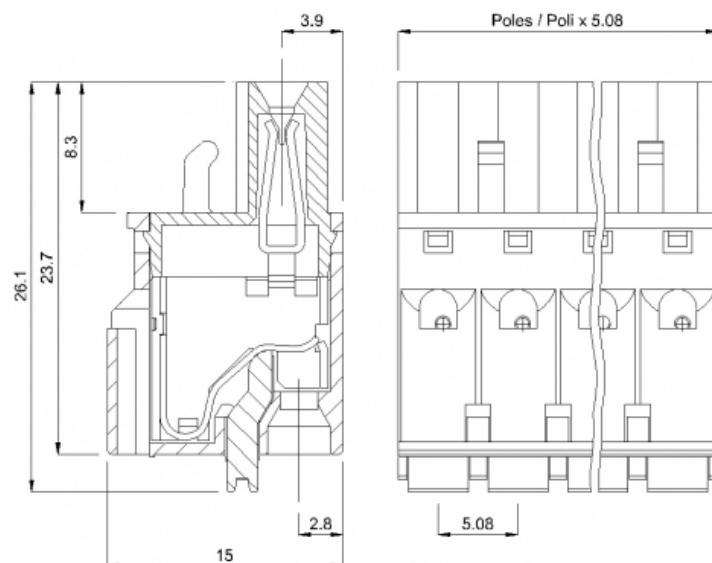

Screwless plug-in connector - Offset Stackable version - Pitch 5,08mm - 02÷24 poles

GENERAL INFORMATION

pitch:	5,08 mm
housing height:	15,00 mm
housing depth:	23.7 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	
wire stripping:	max 10 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	16A
voltage:	250V
test voltage:	4 kVrms/60s

MECHANICAL CHARACTERISTICS

spring releasing:	0.6 x 3.5mm
-	-

APPROVALS DATA



current:
voltage:
wire section:
torque:
FILE:

-
-
-
-
-

-
-
-
-
-

UL 1059
16A factory / 16A field
300V
12÷30AWG
-
E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	Steel
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	SHM02-5,08-P	N/A	N/A	N/A
03	SHM03-5,08-P	N/A	N/A	N/A
04	SHM04-5,08-P	N/A	N/A	N/A
05	SHM05-5,08-P	N/A	N/A	N/A
06	SHM06-5,08-P	N/A	N/A	N/A
07	SHM07-5,08-P	N/A	N/A	N/A
08	SHM08-5,08-P	N/A	N/A	N/A
09	SHM09-5,08-P	N/A	N/A	N/A
10	SHM10-5,08-P	N/A	N/A	N/A
11	SHM11-5,08-P	N/A	N/A	N/A
12	SHM12-5,08-P	N/A	N/A	N/A
13	SHM13-5,08-P	N/A	N/A	N/A
14	SHM14-5,08-P	N/A	N/A	N/A
15	SHM15-5,08-P	N/A	N/A	N/A
16	SHM16-5,08-P	N/A	N/A	N/A
17	SHM17-5,08-P	N/A	N/A	N/A
18	SHM18-5,08-P	N/A	N/A	N/A
19	SHM19-5,08-P	N/A	N/A	N/A
20	SHM20-5,08-P	N/A	N/A	N/A
21	SHM21-5,08-P	N/A	N/A	N/A
22	SHM22-5,08-P	N/A	N/A	N/A
23	SHM23-5,08-P	N/A	N/A	N/A
24	SHM24-5,08-P	N/A	N/A	N/A