


Nominal Transmission Characteristics								
Frequency (MHz)	RL (dB)	IL (dB/100M)	DOP (ns)	SKEW (ns)	NEXT (dB)	PSNEXT (dB)	ACR-F (dB)	PSACR-F (dB)
1	20	2.2	590	62	74.3	72.3	67.8	64.8
4	23	4.1	572	62	65.2	63.2	55.7	52.7
10	25	6.5	565	62	59.3	57.3	47.8	44.8
16	25	8.2	563	62	56.2	54.2	43.7	40.7
20	25	9.3	562	62	54.7	52.7	41.7	38.7
31.25	23.6	11.5	560	62	51.8	49.8	37.9	34.9
62.5	21.5	16.2	558	62	47.3	45.3	31.8	28.8
100	20.1	20.4	557	62	44.3	42.3	27.8	24.8
200	18	29.2	556	62	39.7	37.7	21.7	18.7
250	17.3	33.8	555	62	38.3	36.3	19.8	16.8

Note: The above transmission performance for the 100M, 20 ± 2 °C under the conditions tested

PRODUCT DATA SHEET			
TYPE		F/UTP CAT 6 4*2*23AWG PVC	
Structure		Structure A	
Conductors	Structure AWG	AWG	23#(1/23)
	Material	-----	Solid Bare Copper
	Diameter	mm	Ø0.56+/-0.008
Insulation	Material	-----	HDPE
	Diameter	mm	Ø1.06+/-0.05
	Average Thickness	mm	0.25+/-0.05
Shielding 1 Assimby	Type	-----	-----
	Direction	-----	S
	NO.of insulations	Pair	4
Shielding 2	Material	-----	Al-Foil Screneed
Shielding 3 Jacket	Shield	-----	-----
	Material	-----	LDPE
	Diameter	mm	Ø7.6+/-0.3
	Average Thickness	mm	0.6+/-0.1
	Flame Rate	-----	CMX/CM/CMR

uction:

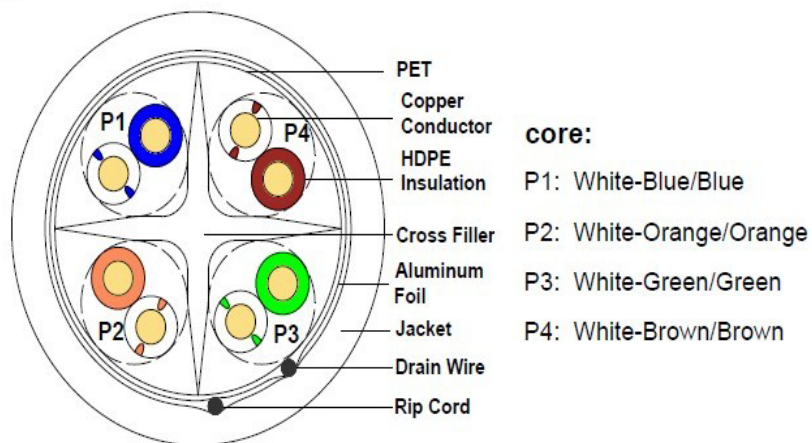

Mechanical Characteristics	
1.Cable under the minimum tension	≥400N
2.Conductor elongation	≥15%
3.Jacket before Aging tesile Strength	≥9.7Mpa
Elongation	≥350%
4.Jacket After Aging Tensile Strength	≥75%×Tensile Strength before Aging
Elongation	≥75%× Elongation before Aging
Electrical Characteristic	
1.Impedance :	1-250MHz 100+/-15(Ohms)
2.Rated Temperature:	75 °C
3.DC Resistance Unbalance(%):	Max2.5
4.DC Resistance 20 °C	84 (Ohms/Km)
5.Pair-to- Gruond Capacitance Unbalance :	330(pF/100M)
6.Insulation Resistance:	>5000M Ω Km
7.Dielectric strength:	DC 2500V 2S
8.Insulation Temperature :	0~50 °C
9.Operation temperature:	-20~60 °C

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	TP-49G
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

F/UTP CAT6 INSTALLATION CABLE 305m
(BLACK)

