



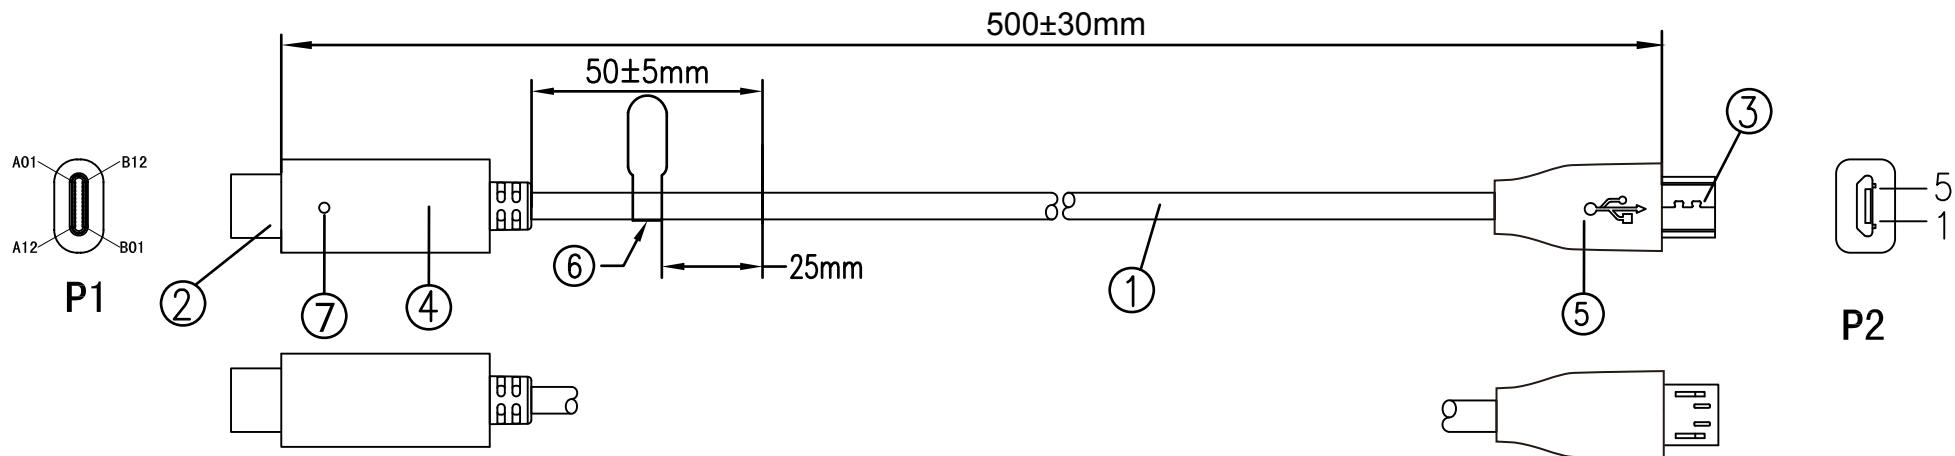

### PIN ASSIGNMENT:

| USB C TYPE(P1) | USB2.0 Micro BM(P2) |
|----------------|---------------------|
| A1,B1,A12,B12  | 5 GND               |
| A4,B4,A9,B9    | 1 V+                |
| A6             | 3 D+                |
| A7             | 2 D-                |
| Shell          | Shell Shldd         |
| A5             | Resistor            |

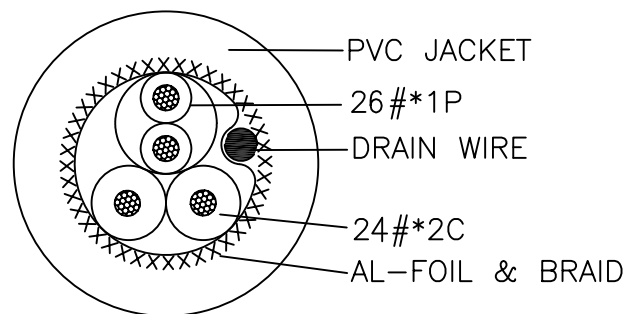

| ⑦   | LIGHT            | 1PCS | BLUE LED LIGHT                                           |
|-----|------------------|------|----------------------------------------------------------|
| ⑥   | TAG              | 1PCS | DELTACO TAG                                              |
| ⑤   | HOOD MOLD        | 1PCS | BLACK PVC                                                |
| ④   | HOOD MOLD        | 1PCS | BLACK PVC                                                |
| ③   | USB2.0 Micro B M | 1PCS | NICKEL PLATED SHELL                                      |
| ②   | USB3.1 TYPE C M  | 1PCS | NICKEL PLATED SHELL                                      |
| ①   | CABLE            | 1PCS | (26AWG*1P)+24AWG*2C+AEB<br>OD:5.0±0.2mm BLACK PVC JACKET |
| NO. | PARTS NAME       | Q'TY | SPECIFICATION                                            |

### NOTES:

1. TESTING: 100% OPEN AND SHORT TEST.
2. ALL MATERIAL BE RoHS COMPLIANT.
3. The maximum current is 2A.

| APPROVED | CHECKED | DRAWN | CUSTOMER: |           |
|----------|---------|-------|-----------|-----------|
|          |         |       | ITEM NO.  | USBC-1023 |
|          |         |       | DRAW NO.  |           |
|          |         |       | UNIT      | mm        |
|          |         |       | SCALE     | NONE      |

### DESCRIPTION:

USB 3.1 TYPE C MALE/  
USB 2.0 Micro B MALE

