



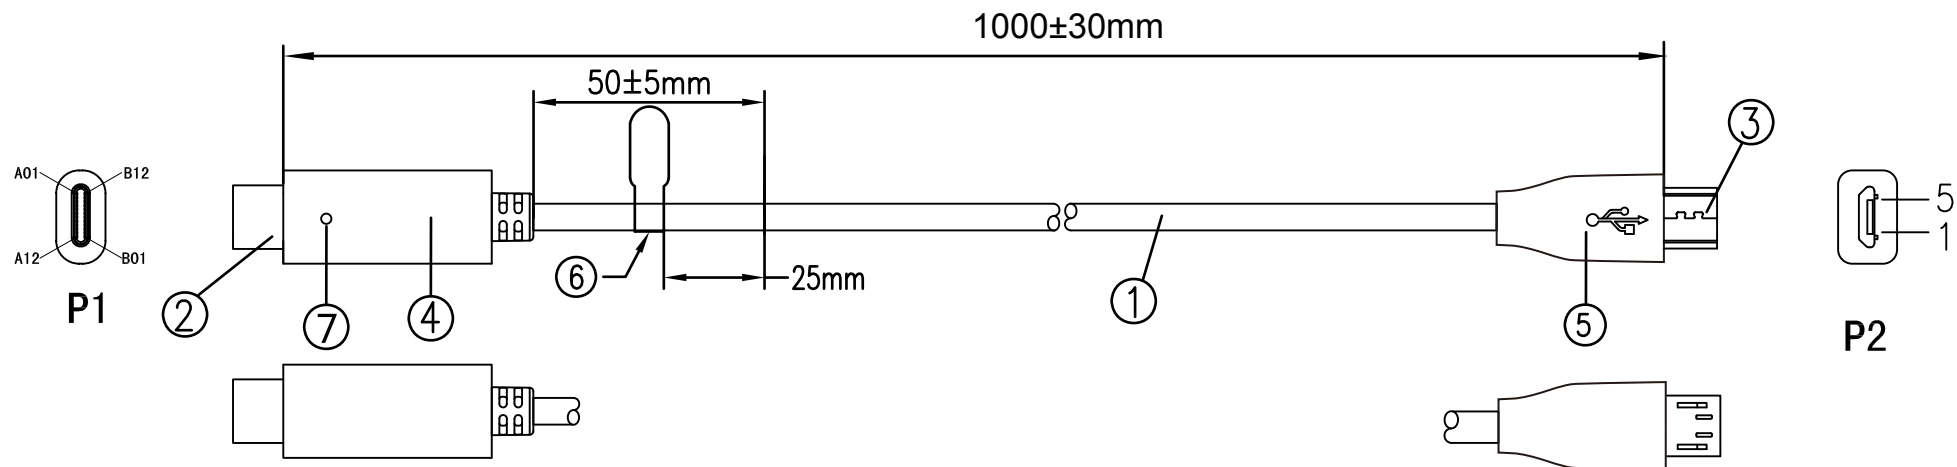

PIN ASSIGNMENT:

USB C TYPE(P1)	USB2.0 Micro BM(P2)
A1,B1,A12,B12	5 GND
A4,B4,A9,B9	1 V+
A6	3 D+
A7	2 D-
Shell	Shell Shldd
A5 — Resistor	

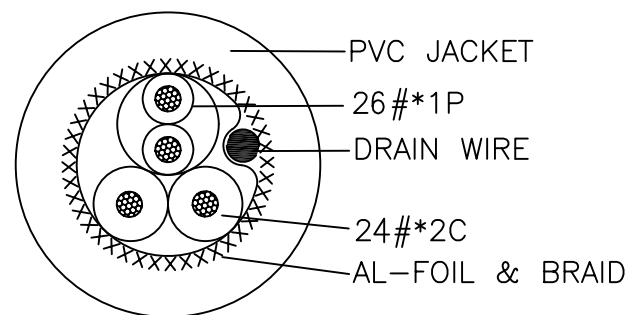

⑦	LIGHT	1PCS	BLUE LED LIGHT
⑥	TAG	1PCS	DELTACO TAG
⑤	HOOD MOLD	1PCS	BLACK PVC
④	HOOD MOLD	1PCS	BLACK PVC
③	USB2.0 Micro B M	1PCS	NICKEL PLATED SHELL
②	USB3.1 TYPE C M	1PCS	NICKEL PLATED SHELL
①	CABLE	1PCS	(26AWG*1P)+24AWG*2C+AEB OD:5.0±0.2mm BLACK PVC JACKET
NO.	PARTS NAME	Q'TY	SPECIFICATION

NOTES:

1. TESTING: 100% OPEN AND SHORT TEST.
2. ALL MATERIAL BE RoHS COMPLIANT.
3. The maximum current is 2A.

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	USBC-1024
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

USB 3.1 TYPE C MALE/
USB 2.0 Micro B MALE

