

TECHNICAL SPECIFICATIONS

VOLUME 1

- BRASS
- STAINLESS STEEL
- ALULITE
- PLASTIC
- DISPOSABLE



fischer[®]
CONNECTORS



TABLE OF CONTENTS

GENERAL INFORMATION

■ Connector overview	A-3
■ Product specifications	A-5
■ Cable assemblies	A-16

FISCHER CORE SERIES **BRASS**

■ Introduction	B 1-1
■ Multipole low voltage	B 2-2
■ Multipole high voltage	B 2-50
■ Coax low voltage	B 3-2
■ Coax high voltage	B 3-28
■ Triax	B 4-2
■ Mixed coax	B 5-2
■ Mixed high voltage	B 5-18
■ Accessories & tooling	B 6-1

FISCHER CORE SERIES **STAINLESS STEEL**

■ Key features	B 7-1
■ Table of contents	B 7-2

FISCHER CORE SERIES **ALULITE™**

■ Key features	B 8-1
■ Table of contents	B 8-2

FISCHER CORE SERIES **PLASTIC**

■ Key features	B 9-1
■ Table of contents	B 9-2

FISCHER CORE SERIES **DISPOSABLE**

■ Key features	B 10-1
■ Table of contents	B 10-2

Connector overview



BRASS



STAINLESS STEEL



ALULITE

	ANY SIZE ANY CONFIGURATION ANY APPLICATION	HIGH CORROSION RESISTANCE EASY DECONTAMINATION EASY HANDLING	ULTRALIGHT RUGGED HIGHLY CONFIGURABLE
Locking	Push-pull / Quick-release / Friction	Push-pull	Push-pull / Quick-release
Shell material	Brass	Stainless Steel 316L	Aluminum
Plating	Chrome over Nickel	-	Chrome over Nickel
Plug Ø [mm]	9-34	12-34	9-18
Number of contacts	1 to 55	1 to 55	2 to 27
AWG	AWG9-32	AWG9-32	AWG9-32
Contact type	Low voltage / High voltage / Coax / Triax / Hybrid	Low voltage / High voltage / Coax / Triax	Low voltage / High voltage / Coax / Triax
Test voltage DC [kV]	Up to 50	Up to 50	Up to 14
Current rating [A]	Up to 60	Up to 60	Up to 30
Contact termination	Crimp / Solder / PCB	Crimp / Solder / PCB	Crimp / Solder / PCB
Sealing level	IP50 / IP68 / IP69 / Hermetic	IP50 / IP68 / IP69 / Hermetic	IP50 / IP68 / IP69 / Hermetic
Mating cycles	10,000	5,000	10,000



Technical specifications for our Fischer UltiMate™ Series,
Fischer FiberOptic Series and Fischer MiniMax™ Series
can be found in **VOLUME 2**.

Connector overview



PLASTIC



DISPOSABLE



BROADCAST¹⁾

**EASY TO USE
DURABLE
LIGHTWEIGHT**

**COST-EFFECTIVE
EASY TO USE
MODULAR**

**THE BEST OF TRIAX
RUGGED
FOR OUTDOOR USE**


	EASY TO USE DURABLE LIGHTWEIGHT	COST-EFFECTIVE EASY TO USE MODULAR
Locking	Push-pull	Friction
Shell material	PEI (405) PBT (4032)	ABS
Plating	-	-
Plug Ø [mm]	14.5-18.5	17.8
Number of contacts	2 to 27	6 to 19
AWG	AWG9-32	AWG20-30
Contact type	Low voltage / Hybrid	Low voltage
Test voltage DC [kV]	Up to 4	Up to 2.7
Current rating [A]	Up to 30	Up to 3.0
Contact termination	Crimp / Solder / PCB	Crimp
Sealing level	IP67	IP30 / IP40 / IP65
Mating cycles	5,000	10

Push-pull
Brass
Chrome over Nickel
25.5
1
-
Low voltage
Up to 1.7
Up to 14
Crimp / Solder
IP68
5,000

¹⁾ Technical specifications only available in PDF format on www.fischerconnectors.com

ORIGINAL PUSH-PULL LOCKING SYSTEM

Fischer Connectors' original push-pull automatic locking system is widely adopted by the industry for its ease of use, safety of mating and speed in connection and disconnection.

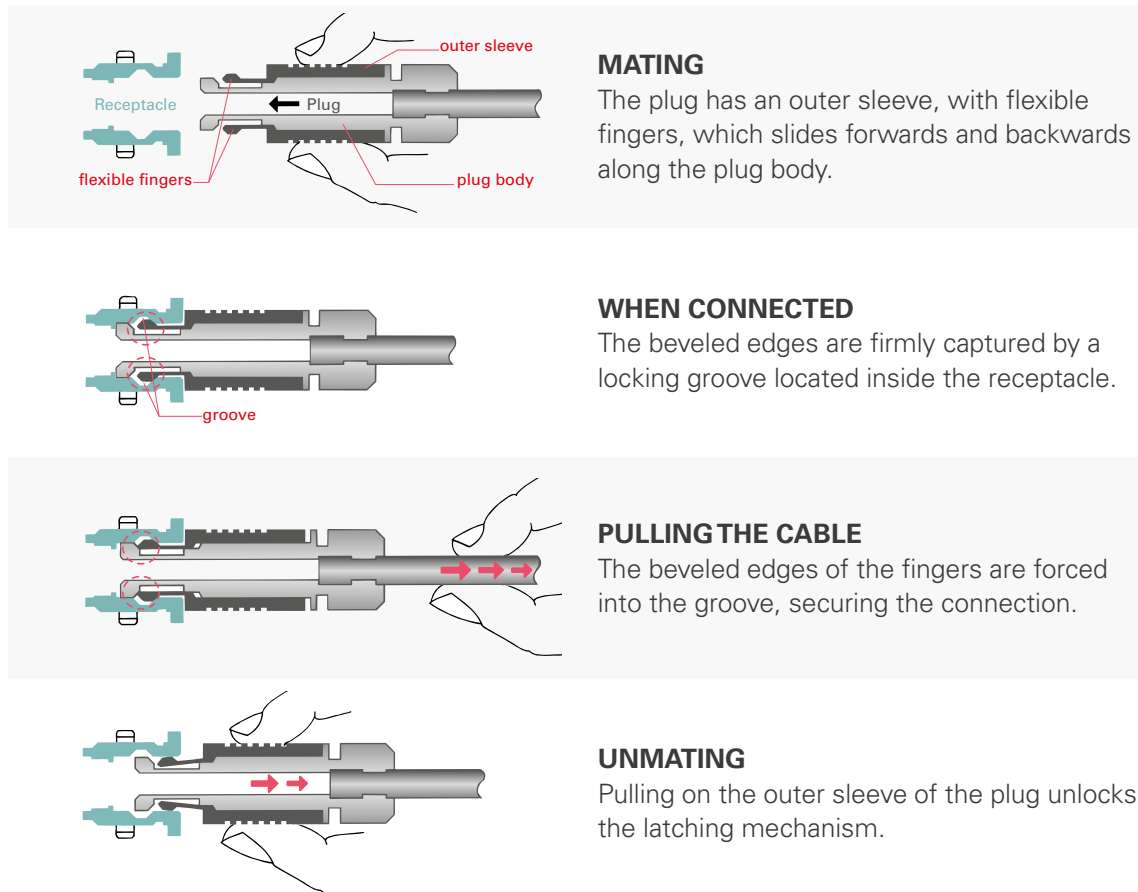

OTHER LOCKING SYSTEMS

LANYARD

Combines push-pull automatic locking with an emergency release lanyard.

QUICK-RELEASE

Designed without a locking mechanism for emergency release.

FRICTION

Designed without a snapping mechanism.

TAMPERPROOF

Features an integral safety locking ring to prevent unauthorized or unintentional disengagement.

SCREW-LOCKING

Enables firm locking by circular movement with the plug's outer sleeve and receptacle feature threading.

Product specifications

SEALING CATEGORIES

The IP (Ingress Protection) classification system provides a reliable method of comparing relative levels of sealing between various connector products.

The protection level offered by a typical envelope is described in IEC 60529, published by the International Electrotechnical Commission (IEC). While the first number describes the level of protection from solid objects, the second one relates to protection from liquids.

Tests performed during the design and qualification of Fischer Connectors' environmentally sealed products are standardized to IP68 at a depth of 2 meters and for duration of 24 hours. Fischer Connectors' hermetically sealed products achieve IP69.




The digits indicate conformity with the conditions summarized in the tables aside.

IP RATING

SOLIDS

0		Non-protected
1		Protected against solid objects greater than 50 mm
2		Protected against solid objects greater than 12 mm
3		Protected against solid objects greater than 2.5 mm
4		Protected against solid objects greater than 1.0 mm
5		Dust protected
6		Dust tight

WATER

0		Non-protected
1		Protected against dripping water
2		Protected against dripping water when filled, up to 15°
3		Protected against spraying water
4		Protected against splashing water
5		Protected against water jets
6		Protected against heavy seas
7		Protected against immersion effects
8		Protected against submersion
9		Protected against intense water jets

Example:


IP68

INGRESS PROTECTION

COMMONLY USED SEALING LEVELS

- IP50 indoor unexposed applications
- IP68 watertight sealing
- Hermetic sealing

Each requires different sealing levels and, therefore, different connector solutions.

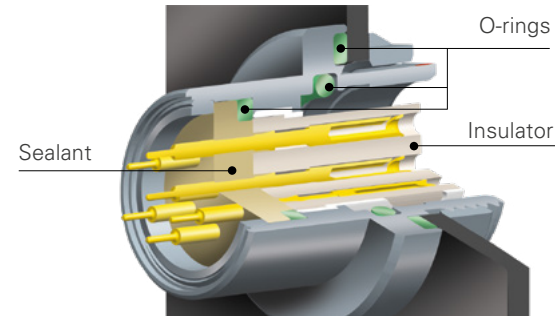

IP50 INDOOR / UNEXPOSED APPLICATIONS

Typically for indoor or industrial applications, the required sealing level is IP50, since the device needs to be protected against dust but not exposed to water.

The IP50 rating can be improved with additional accessories like boots or protective sleeves.



IP68 WATERTIGHT SEALING


Typically for applications requiring outdoor use where they might be exposed to water submersion, rain, sand, mud or any other environmental stress.




HERMETIC SEALING

Typically for applications requiring gas tightness like vacuum applications and pressurized vessels, immersed for long periods of time or exposed to strong jets.

100% of the hermetic pieces are tested with a leak testing instrument to ensure a leak smaller than 10^{-8} mbar l/s.

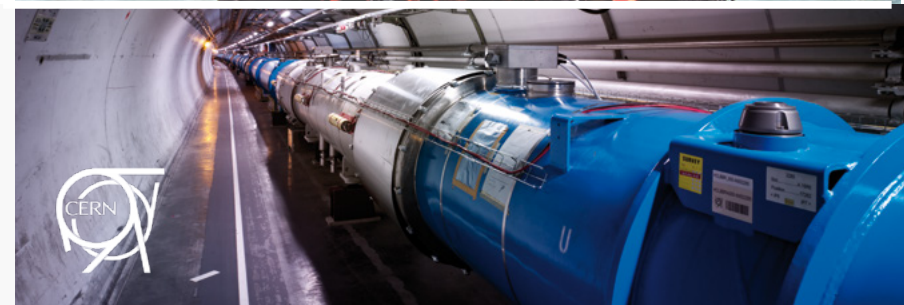

HOW TO CHOOSE YOUR RECEPTACLE BODY STYLES

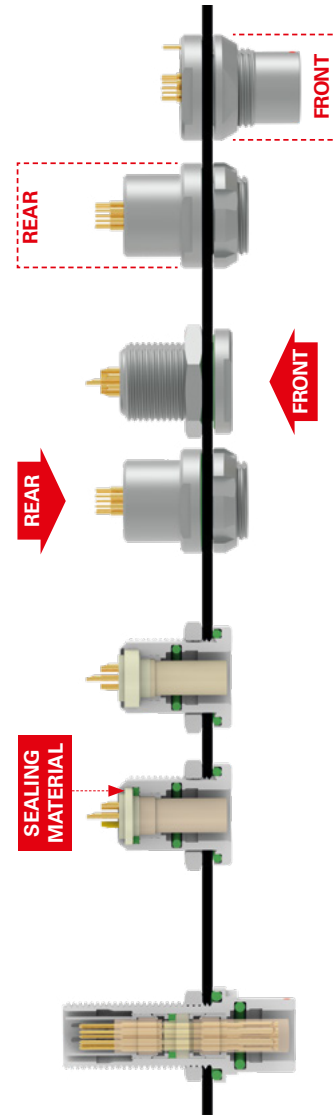

Front and rear projecting

- Depending on whether you need the space saving inside or outside the device
- Also available in front or rear mounting

Front and rear mounting

- Depending on how you need to process your assembly
- Rear mounting is commonly used for PCB mount

IP68 watertight or hermetic designs

- Hermetic has a specific sealing material for best sealing under high pressures

Feedthrough

- Hermetic panel bulkhead feedthrough

MATERIALS

MATERIAL NAME	IDEAL FOR	TEMPERATURE	MAIN ATTRIBUTES
SHELL MATERIAL			
Chromium-plated brass	Ruggedness	-100 to +200°C	Salt mist and mechanical resistance, cost efficiency, electrical conductivity
Aluminum	Lightweight	-100 to +200°C	Lightweight
Stainless steel	Cleaning / Radiation	-100 to +350°C	Corrosion resistance, surface cleanability, nuclear radiation and mechanical resistance
PEI	Sterilization	-65 to +200°C	Sterilization in autoclave, EtO, Cidex, gamma radiation, Steris®, Sterrad®
PBT	Insulation	-65 to +135°C	Electrical insulation, low temperature manipulation
ABS	Cost efficiency	-20 to +65°C	Disposable solutions, medical applications
CONTACT BLOCK MATERIAL			
PEEK	High temperature	-65 to +250°C	High temperature, high chemical and high radiation resistance
LCP	High temperature	-65 to +200°C	High temperature and high chemical resistance
PBT	Cost efficiency	-65 to +135°C	High chemical resistance, cost efficiency
PTFE	Electrical insulation	-65 to +160°C	High dielectric strength, high chemical resistance
ABS	Cost efficiency	-20 to +65°C	Disposable solutions, good stability
O-RING & SEALING MATERIAL			
FPM (Viton®)	Hermeticity	-20 to +200°C	Acids, weather, ozone, fuels, mineral and silicone oils, high vacuum, gamma rays
EPDM	Low temperature	-50 to +160°C	Alcohol, weather, hot water, vapour, detergents, gamma rays
NBR	Oil resistance	-30 to +110°C	Acids, mineral oils, petrol, weather, detergents
FVMQ	High temperature oil resistance	-55 to +200°C	Mineral oils, alcohol, weather, hot water, detergents
TPE	Soft accessories	-55 to +130°C	Very resistant, except to aromatic and chlorinated hydrocarbon
Silicone based resin	IP68 sealing	-55 to +200°C	Mineral oils, acids, alkalines, inorganic saline solutions
Epoxy based resin	Hermeticity	-65 to +150°C	High chemical and radiation resistance

Product specifications


A/Z POLARITY

To protect users from contact with dangerous voltage, most of Fischer Connectors' products are available in two versions:

STANDARD A POLARITY

The contacts of the receptacle are protected against accidental touch.


Recommended when voltage is present on the receptacle.

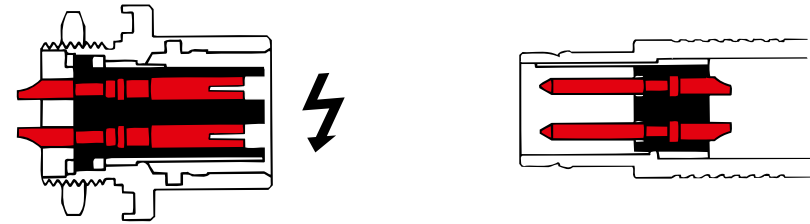


INVERTED Z POLARITY

The contacts of the plug are protected against accidental touch.

Recommended when voltage is present on the plug.

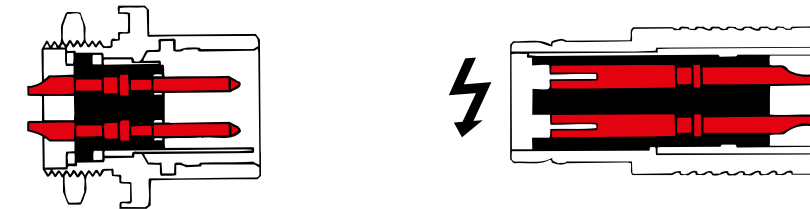

TEST VOLTAGE & OPERATING VOLTAGE

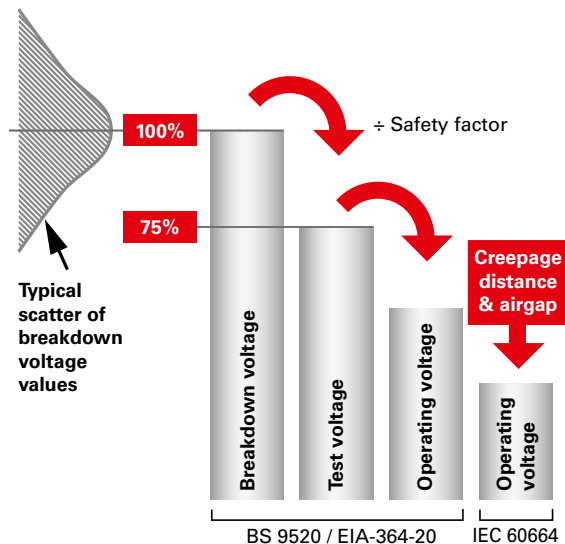

BREAKDOWN VOLTAGE

Maximum voltage difference that can be applied before the occurrence of a disruptive discharge between mutually insulated portions of a connector or between insulated portions and the ground.

TEST VOLTAGE (or withstanding voltage)

Voltage level at which the connector is tested during the qualification test. This value represents the upper physical limit. It is usually set at 75% of breakdown value.

OPERATING VOLTAGE (or rated voltage)

Voltage under which the connector will actually work in the equipment over the normal expected lifetime and in typical environmental conditions.

General recommendation for connectors in common applications

For connectors in common applications, IEC60664 is in particular recommended. This specification uses creepage distance instead of test voltage as a calculation basis for the operating voltage, taking into account the above-mentioned long-term effects. It is similar to German VDE 0110; typical applications are classified in insulation groups depending on their exposure to pollution.

Fischer Connectors recommends the use of IEC60664 in general multipole connector specifications, unless other more specific standards or regulations are applicable to the design. For example, IEC 60601 provides adequate special guidelines for medical devices.

All values given here are valid for mated connectors, provided that termination of connectors has been completed with adequate cable and following correct termination procedures. Other standards recommend a calculation using the test voltage as a basis with the application of a safety factor.


For example, BS 9520 recommends setting the operating voltage at:

- $0.33 \times \text{test voltage}$ for $500\text{V} < \text{test voltage} < 3\text{kV}$
- $0.66 \times \text{test voltage}$ for $\text{test voltage} > 3\text{kV}$

Similar recommendations are provided in EIA-364-20 and former MIL-STD-1344 method 3001.

CURRENT RATING (Maximum permissible current)

DERATING CURVE DERIVED FROM THE BASIC CURVE

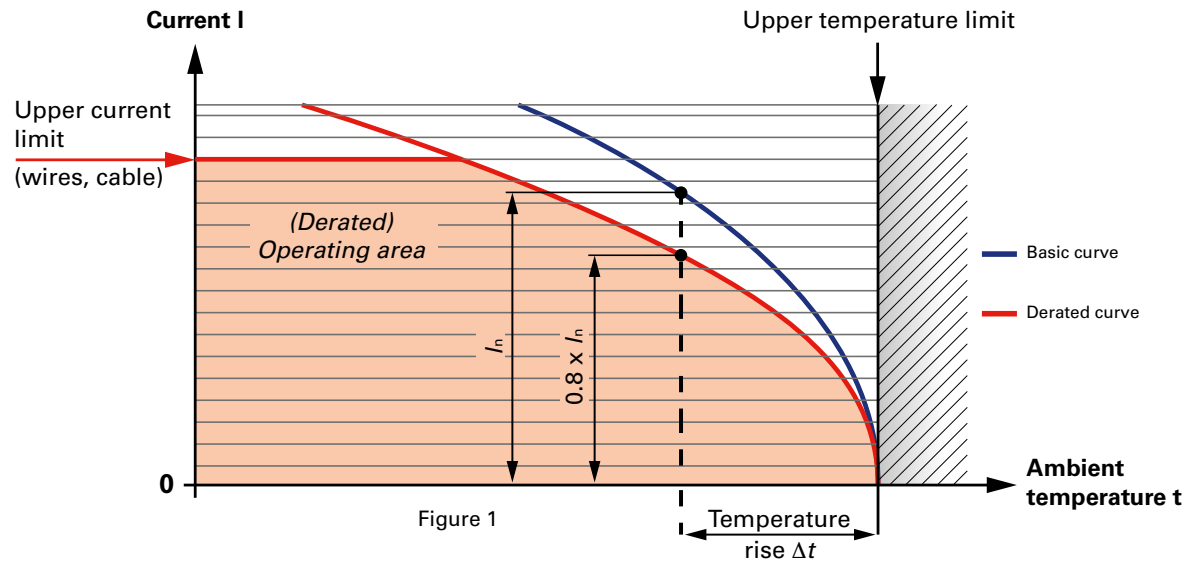

The current values listed under “Electrical & contact configurations” were measured in our test laboratory according to IEC 60512-5-2: Current-carrying capacity test, Test 5b: Current-temperature derating. They are the currents that create a temperature rise of 40 °C (unless otherwise specified) within the connectors due to the self-generated heat, and they belong to the basic curve shown in Figure 1.

The maximum permissible current (I) as defined by the above mentioned IEC standard is the basic curve derated by a factor of 0.8 to account for manufacturing tolerances and uncertainty in measurements.

When selecting a connector, attention must be paid to the fact that the temperature rise caused by current must be added to the ambient temperature and that the resulting value shall not exceed the upper temperature limit of the materials, listed under the “Operating temperatures” sections and plotted as a vertical line on the graphs shown in Figure 1.


The current-carrying capacity may be further limited by external factors, for example the size of the wire and the cable characteristics. This upper current limit is plotted as a horizontal line on the graphs shown in Figure 1.

The operating area is defined by the surface below the derated curve and limited on top by the upper current limit.

The current values listed under “Electrical & contact configurations” are valid for each contact. For coaxial and triaxial connectors, the current is valid for the center and the outer contact.

HIGH FREQUENCY SIGNAL & DATA TRANSMISSION

DATA TRANSMISSION PRINCIPLES

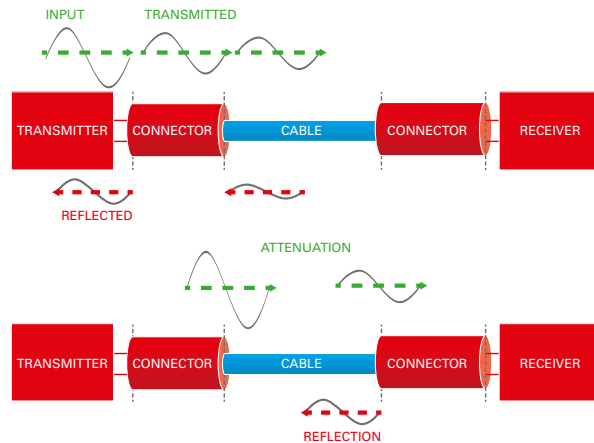

Challenges in data transmission

When a signal is emitted at the transmitter, it must undergo minimal distortion across the system (transmitter, connectors, cable, receiver) to be properly recovered at the receiver.

Types of signal distortion across the transmission link:

- **Return loss:** When the impedances of two interfaced media do not match (i.e., transmitter/connector, connector/cable, ...), some parts of the signal will reflect back towards the source and be lost. The amount of this loss comes from impedance mismatch and is characterized by the return loss.
- **Insertion loss:** Insertion loss describes the attenuation of the signal along the transmission path. This mainly arises from losses both in the dielectric and the conductors.
- **Crosstalk:** Signals running in close-lying channels are likely to couple to one another. This is described as crosstalk terms.
- **Noise:** Unwanted interferences which could either be external or internal to the system itself might add up to the original signal and cause distortion. For instance, internal interferences can be linked to the noise generated from the transmitter or receiver.

CONNECTOR DESIGN RULES TO OPTIMIZE DATA TRANSMISSION

At a system level, the return loss, insertion loss, crosstalk and noise are critical parameters to ensure high quality data transmission. However, impedance and crosstalk play a more prominent role at the connector level.

Connector with optimized impedance

To optimize impedance matching, the following factors must be considered: Contact diameter, interaxial contact distance, contact form factor, and the dielectric constant of all the components (i.e., type of material).

Figures 1 and 2 illustrate the notion of impedance matching in which the green area depicts the tolerated range: Fig. 1 shows a connector with poor impedance-matching, while Fig. 2, shows a connector with optimized impedance matching.



Preventing Crosstalk

To minimize crosstalk, the geometrical distribution of the contacts as well as the contact layout (i.e., signal attribution to specific contacts) are critical.

Figures 3 and 4 illustrate the latter by displaying the crosstalk for two different contact layouts: Fig. 3 shows a connector where the contact layout was not optimized, while Fig. 4 shows a reduced crosstalk noise level which was achieved as a result of an optimized contact layout.



Product specifications

HIGH FREQUENCY SIGNAL & DATA TRANSMISSION

DATA PROTOCOLS

Data protocols provide us the normative values of data transmission parameters (ex. Insertion Loss, Return Loss, Crosstalk, Noise). This provides a means of ensuring that the various components of a system (transmitter, connectors, cable, receiver) work together and allow for an optimized transmission of the data streams.

Two complementary methods can be used to assess the system's capability of transmitting a certain high-speed data transmission protocol in terms of signal quality and transmission speeds: Numerical simulations (connector only) and Vector Network Analyzer (VNA) measurements (i.e., cable and connector).

Typical high-speed data transmission protocols are USB, Ethernet and standard protocol for the simultaneous transmission of audio and video.

Fischer Connectors' skilled technical and support teams can help you build the perfect system by analyzing your specific application and needs. Please contact your local sales representative for more details.



SYMBOL					
PROTOCOL	USB	SPE (SINGLE PAIR ETHERNET)	ETHERNET	STANDARD AUDIO/VIDEO PROTOCOL	
DESCRIPTION	4 wires for USB 2.0 up to 480 Mbit/s 9 wires for USB 3.2 Gen 1 up to 5 Gbit/s 9 wires for USB 3.2 Gen 2 up to 10 Gbit/s	2 wires for SPE up to 1 Gbit/s (1000BASE-T1)	4 wires for Ethernet up to 100 Mbit/s (100BASE-TX) 8 wires for Ethernet up to 5 Gbit/s (5GBASE-T)	19 wires minimum for standard audio/video protocol	
FISCHER SERIES PERFORMANCE UP TO:					
CORE SERIES	USB 3.2 Gen 2	1000BASE-T1	5GBASE-T	18 Gbit/s	4K UHD Up to 60 fps
ULTIMATE SERIES	USB 3.2 Gen 2	1000BASE-T1	1000BASE-T	10.2 Gbit/s	4K UHD Up to 30 fps
MINIMAX SERIES	USB 3.2 Gen 2	1000BASE-T1	5GBASE-T	18 Gbit/s	4K UHD Up to 60 fps

USB 3.2 Gen 1 and Gen 2 Connectors and Cable assemblies are validated following parameters (such as impedance, attenuation, Cross talks, conversion modes) listed in the Universal Serial Bus 3.1 Legacy Connectors and Cable Assemblies Compliance Document (Revision 1.1). Speed rate mentioned is the maximum theoretical speed rate achievable with the according protocol. For further request on the parameters tested and the test reports, please contact Technical Support.

CONTACTS & ACCESSORIES



SOLDER CONTACTS

Most versatile
Pre-installed contacts
Qualified assemblers required

- Can be produced with any type of contact block material and accept a wide range of wire sizes.
- Contacts are pre-installed in the insulator block, and the wires can be terminated with any appropriately sized soldering iron.
- May require operators who are qualified in specialized soldering techniques.



PCB CONTACTS

PCB or Flex circuit mount
Reduced pin diameter
Wave soldering

- Designed to be mounted directly onto a PCB or flex circuit, can be used in wave soldering operations for faster production assembly.
- Preferred for high rates of data transmission due to the low distance to the board that their integration allows. This helps reducing signal perturbations.
- PCB pins are generally used on rear mounted panel connectors.



CRIMP CONTACTS

Selectively annealed area
Special tools required
Limited range of wire sizes

- Each contact has a selectively annealed area which is deformed during assembly by specialized tooling to assure proper termination of the wire to the contact.
- Commonly used for field termination or repair, as no soldering process is required.
- Not available for sealed or hermetic connectors.

CONTACTS & ACCESSORIES



STAMPED CONTACTS

High volume
Automated cable assembly
Disposable applications

- Optimized for very high volume and automated cable assembly.
- Come on specific reels to be accommodated in automated cable assembly machines.
- Mainly used in disposable applications due to their limited number of mating cycles.



FIBER OPTIC BUTT-JOINT CONTACTS

High optical performance
IP67 unmated
UPC & APC polishing

- The FiberOptic termini rely on butt-joint technology commonly used in the telecom industry to ensure ultra-low insertion and return losses.
- A unique sealing feature on the termini allows easy cleaning and device protection even unmated (IP67) without compromising on the alignment once mated.
- Guaranteed, tested and certified optical performance platform using high precision polishing process.
- The alignment sleeve parts are located in a removable mate adapter for easy maintenance, replacement and cleaning.

BEND RELIEFS



OVERMOLDED STRAIGHT & RIGHT ANGLE BEND RELIEF

- Can accommodate a wide range of cable diameters
- Wide choice of colors and materials (e.g. polyurethane, silicon, etc.)
- Best protection to improve cable flex life



CABLE BEND RELIEF

Tool-free terminations for field installations:

- High quality and improved protection
- Wide range of colors for easy cable identification
- Can accommodate a wide range of cable diameters


PROTECTIVE SLEEVE



Improves mechanical protection on the whole interface:

- Prevents contamination in highly dusty environments
- Protects both plug and receptacle
- Enhances sealing

HEAT SHRINKING TUBE



Allows submersion with adhesive versions:

- Ideal for quick prototyping
- Can accommodate a wide range of cable diameters and multiple cable output
- Protects exposed wires

CABLE ASSEMBLIES



KEY FEATURES



Fischer Connectors provides system designers with everything they need to put together the right interconnect solution for a wide range of applications.

Thanks to the most modern ISO certified cable assembly facilities in Europe, North America and Asia Pacific, our engineering and manufacturing experts ensure short lead times to meet your project deadline.

VERTICAL INTEGRATION

- Connectors
- Components
- Cables

EXPERTISE

- Design
- Manufacturing
- Testing

RELIABILITY

- Sealing
- Sterilization
- Data transmission

Cable assemblies

INTEGRATED CONNECTIVITY SOLUTIONS FOR EVERY PROJECT

Our engineers work closely with your team to find the right solution for the most demanding applications by integrating precision connectors, components, parts, and engineered cables.

Fischer Connectors' skilled technical and support teams help you build the perfect cable assembly for your unique application, providing advice through design, prototype, assembly, testing, manufacturing, installation, and beyond.

LARGE RANGE OF APPLICATIONS:

- High-performance rugged and submersible cable assemblies for the defense and marine markets
- Silicone overmolded solution for high heat protection and maximum flexibility in the medical industry
- High-speed transmission of electrical, power, and optical signals
- Custom and application-specific cable harnesses

MEDICAL



Integration in medical devices

SILICONE



High temperature applications

DEFENSE



Communications

- Overmolded cable assemblies, including thermoplastic & silicone
- Wiring harness assemblies
- Rugged & submersible cable solutions
- Third-party connector integration
- Right-angle overmolds
- Custom overmolds with multi-cable exits
- Potting or heat shrink
- Automated strip and crimp
- Colored overmolding
- Low cost and disposable options

AT YOUR SERVICE, WHEREVER YOU ARE

GLOBAL FOOTPRINT

With our worldwide connectors and cable assembly network, located in Europe, North America and Asia Pacific, we provide our customers with quick turnarounds around the globe.

STREAMLINING YOUR SUPPLY CHAIN


By purchasing cable assemblies, connectors and manufacturing from one place, you deal with one vendor, pay one bill, and reduce the time and the risk it takes to coordinate your project.

ALL THE RIGHT ANGLES

Overmolding, including right-angle and custom connections, silicone and low friction cables, are all part of the business. We have overmolding machines for both polyurethane and silicone.

COMPETITIVE PRICING

Companies that use Fischer Connectors for both their connectors and assembly solutions can see significant savings over the cost of handling each vendor separately.

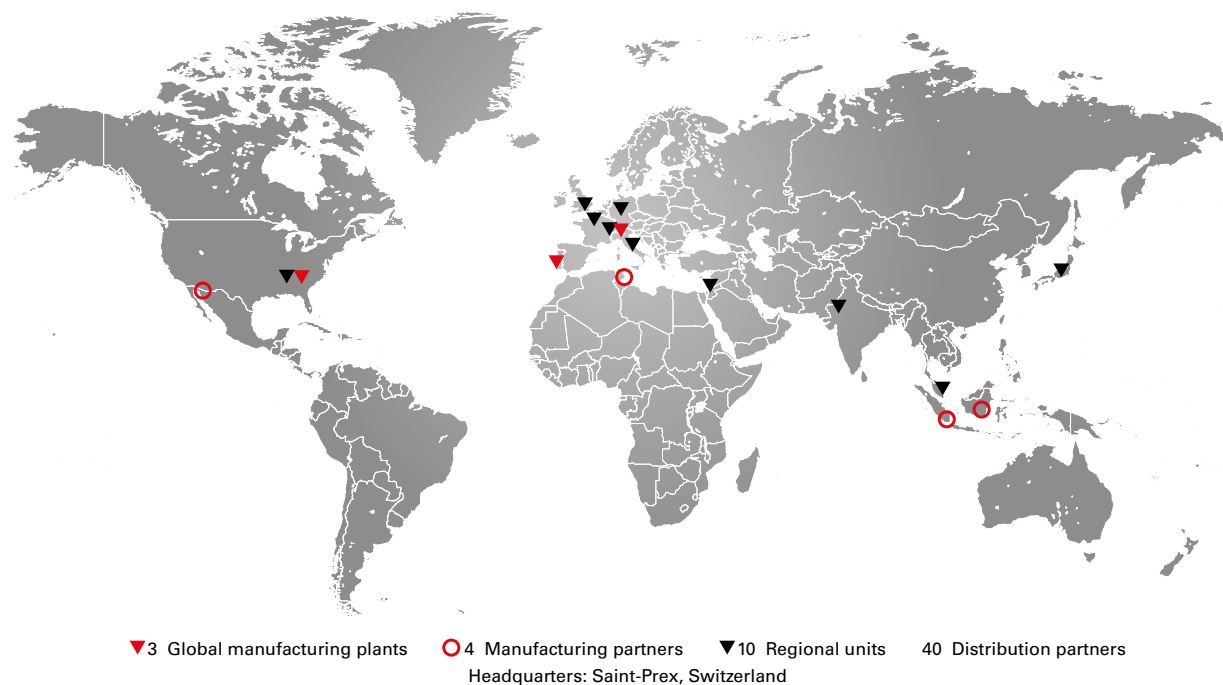

TOP QUALITY

We build cable assemblies to the same rigorous quality standards as we build our connectors. Whether you're looking for a simple or complex assembly, Fischer Connectors is able to deliver exactly what you need, when you need it.

Cable assemblies

CUSTOM CABLE ASSEMBLIES

Fischer Connectors has helped hundreds of customers find their unique cable assembly solution that fulfills technical, quality and cost requirements.

From prototyping, design validation, testing and delivery, we support your project from the beginning to the end.

Our team of experts is at your service to recommend the best solution for your connectivity challenges and turn them into a success story.



A WIDE RANGE OF CUSTOM OVERMOLDING



Thermoplastic overmolds for the Fischer Core Series, Fischer MiniMax™ Series and Fischer FiberOptic Series



Right-angle thermoplastic overmolds for the Fischer Core Series and Fischer UltiMate™ Series



Silicone overmolds with low friction coatings for medical and high temperature applications



Thermoplastic overmolds for the Fischer UltiMate™ Series



Thermoplastic overmolds with custom cable breakouts



Custom thermoplastic overmolds for multi-cable exits


B1

CHAPTER



FISCHER CORE SERIES **BRASS** INTRODUCTION

■ Body styles	B 1-2
■ Locking system	B 1-4
■ Size selection	B 1-6
■ Part numbering	B 1-8
■ Contact configurations	B 1-10
■ Technical dimensions (Panel cut-outs)	B 1-12
■ Technical information	B 1-14
■ Options	B 1-17

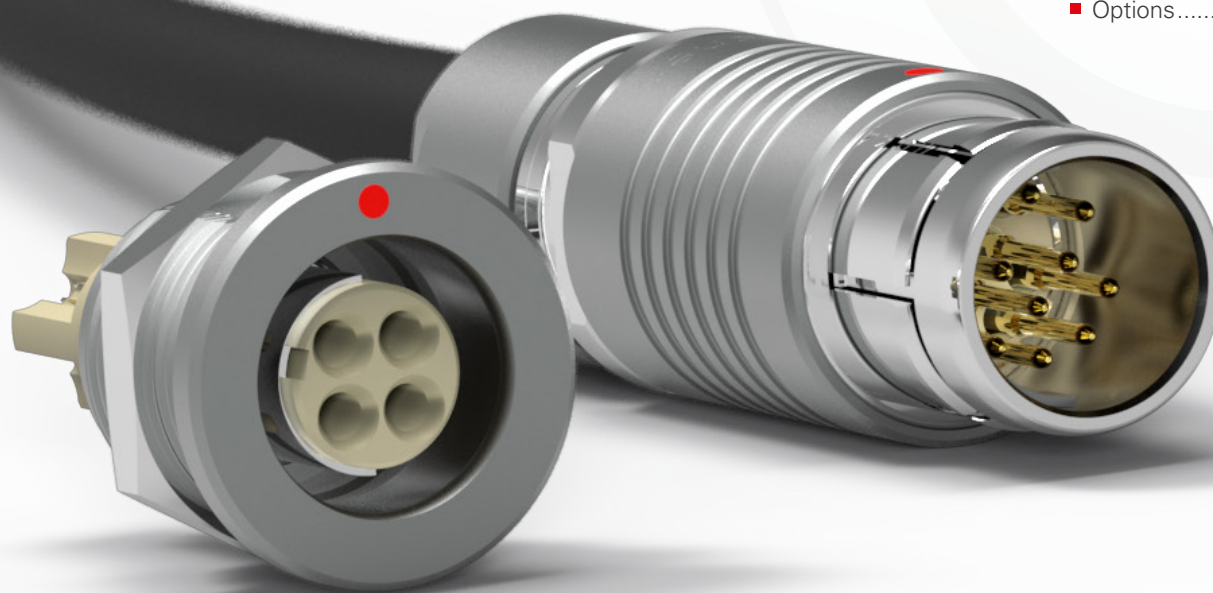

PLUGS

CABLE MOUNTED



S



SC



SOV



SA



SV



SS

BODY STYLES

Locking system	Push-pull	Quick-release	Non-locking	Push-pull	Push-pull	Push-pull
Sealing	IP50 / IP68	IP50 / IP68	IP50 / IP68	IP50 / IP68	IP50 / IP68	IP50 / IP68
Design	Standard	Standard	Standard	Lanyard	Tamperproof	Short/Overmolding



SSC



WSO

BODY STYLES

Locking system	Quick-release	Push-pull
Sealing	IP50 / IP68	IP50 / IP68
Design	Short/Overmolding	Right-angle

PANEL FRONT MOUNTED



SF



SFU

SFE

BODY STYLES

Locking system	Non-locking	Non-locking
Sealing	IP50	IP68 Hermetic
Design	Front-projecting	Front-projecting

PANEL REAR MOUNTED



SFPU

SFPE

BODY STYLES

Locking system	Non-locking
Sealing	IP68 Hermetic
Design	Front-projecting

Body styles

FISCHER CORE SERIES **BRASS**

RECEPTACLES

CABLE MOUNTED



BODY STYLES

	K	KE	KS	KSE
Sealing	IP50	IP68	IP50	IP68
Design	Standard		Short/Overmolding	

RECEPTACLES & FEEDTHROUGH

DIFFERENT DESIGN



BODY STYLES

	DG	DGP	WDE
Sealing	IP50	IP50	Hermetic
Design	Completely threaded Solder/Crimp		Bulkhead feedthrough PCB

PANEL FRONT MOUNTED



BODY STYLES

	D	DB	DEU	DEE	DBEU	DBEE	DK	DKE
Sealing	IP50	IP50	IP68	Hermetic	IP68	Hermetic	IP50	IP68
Design	Rear-projecting	Front-projecting	Rear-projecting		Front-projecting		Cable mounted	Cable mounted

PANEL REAR MOUNTED



BODY STYLES

	DBP	DBPC	DBPU	DBPE	DBPLU	DBPLE	DKBE
Sealing	IP50	IP50	IP68	Hermetic	IP68	Hermetic	IP68
Design	Rear-projecting	Right-angle PCB	Rear-projecting		Front-projecting		Cable mounted


All dimensions and images shown are in millimeters and are for reference only.

PUSH-PULL AUTOMATIC LOCKING PLUGS


S - SS - WSO

Fischer Connectors' original push-pull automatic locking is widely adopted by the industry for its ease of use, safety of mating and speed in connection and disconnection.

- Fully secured against accidental disconnection, it provides unparalleled signal integrity.
- Integrated into the connector housing, it is ideal for compact product design.
- For more details on Fischer Connectors' locking systems, visit: www.fischerconnectors.com



Secure locking when cable pulled



Pull the outer sleeve to unlock

QUICK-RELEASE PLUGS


SC - SSC

Fischer Connectors' quick-release plugs are designed without locking mechanism for emergency release.

- Quick-release plugs snap into the receptacle with an audible "click".
- A strong pull on the cable will allow unmating of the plug.
- Specially suited to avoid injuries to the users and damages to the material in case of accidental stress.



Clicking mechanism




Plug released when cable pulled

LANYARD PLUG

SA

The lanyard plug combines push-pull automatic locking with an release lanyard.

- A strong pull on the lanyard will unlock the latching mechanism.
- Specially suited to allow quick unmating on the field.

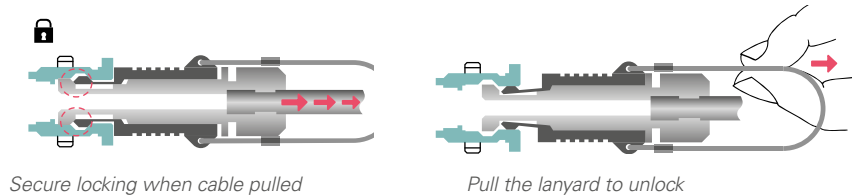


FRICTION PLUGS

SOV - SF - SFE/SFU - SFPE/SFPU

Our non-locking plugs are designed without clicking mechanism.

- A soft pull on the connector will release the plug.
- Specially suitable for connections with limited accessibility and/or requiring no locking.

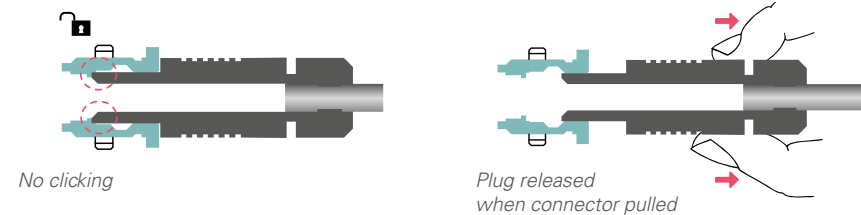


TAMPERPROOF PLUG

SV

Our tamperproof plug features an integral safety locking ring to prevent unauthorized or unintentional release.

- When tightened, the knurled ring will prevent unmating of the plug.
- Specially suitable for applications involving high voltage or current.

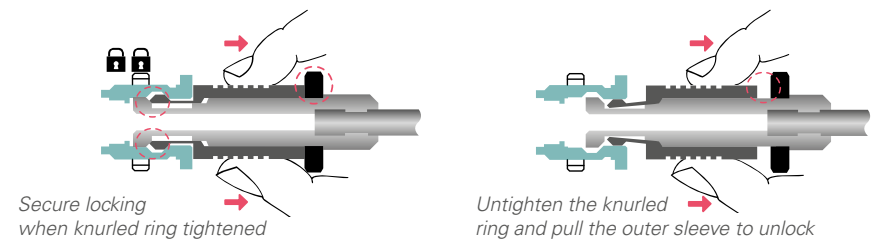

CONNECTOR SIZE VERSUS CABLE DIAMETER

¹⁾ Pictures represent standard S plug, but values can be extended to all cable mounted plugs, except for SS/SSC body styles.
²⁾ For max cable ø, values in parenthesis are valid for sealed connectors (IP68).



Size	Multipole low voltage		
	Min Cable ø	Max Cable ø	Nbr of Contacts
102	1.4	4.7 (4.3) ²⁾	2-9
103	1.7	6.7 (6.2) ²⁾	2-12
1031	2.2	7.2 (6.7) ²⁾	10-19
104	2.9	8.7	2-27
105	2.5	10.7	2-27
106	4.2	19.2	3-24
107	5.7	22.7	4-55
For more information see <i>Multipole low voltage</i> section, page B 2-39			

Size selection

FISCHER CORE SERIES **BRASS**

LV = Low Voltage HV = High Voltage

Multipole high voltage			Coax low voltage		Coax high voltage		Triax		Mixed high voltage			Mixed coax		
Min cable ø	Max cable ø	Nbr of contacts	Min cable ø	Max cable ø	Min cable ø	Max cable ø	Min cable ø	Max cable ø	Min cable ø	Max cable ø	Nbr of contacts	Min cable ø	Max cable ø	Nbr of contacts
			1.5	4.7 (4.3)	1.5	4.7 (4.3)	1.5	4.7 (4.3)						
			1.7	6.7 (6.2)	1.7	6.7 (6.2)	1.7	6.7 (6.2)						
2.9	8.7	4 HV	2.9	8.7	2.9	8.7			2.9	8.7	1 LV 2 HV	2.9	8.7	1 Coax 1-4 LV
3.2	10.7	3-5 HV	3.2	10.7	3.2	10.7			3.2	10.7	1-10 LV 1-4 HV	3.2	10.7	1 Coax 1-9 LV
4.2	19.2	6-7 HV							4.2	19.2	6 LV 2 HV			
5.7	22.7	7 HV			5.7	22.7								
For more information see <i>Multipole high voltage</i> section, page B 2-58			For more information see <i>Coax low voltage</i> section, page B 3-23		For more information see <i>Coax high voltage</i> section, page B 3-34		For more information see <i>Triax</i> section, page B 4-18		For more information see <i>Mixed high voltage</i> section, page B 5-24			For more information see <i>Mixed coax</i> section, page B 5-16		

All dimensions and images shown are in millimeters and are for reference only.

ORDERING INFORMATION

How to build a part number

Fischer Connectors Core Series Brass is built on a modular design and offers over 20,000 standard configurations.

Refer to the table aside to find the information you need to build the part number to order your selected connector.

For customized solutions, please contact us.

CONNECTORS PARTS

Part system	Body style	Size	Polarity
-------------	------------	------	----------

PART NUMBER EXAMPLES

Plug	S	102	A
------	---	-----	---

S cable mounted plug in Size 102 with 7 (multipole) low voltage male contacts and following options.

Receptacle	D	102	A
------------	---	-----	---

D panel mounted receptacle in Size 102 with 7 (multipole) low voltage female contacts and following options.

Cable mounted plugs S/SC SOV SA SV SS/SSC WSO	Size 102 103 1031 104 105 106 107	As standard rule A = male contacts on plug and female contacts on receptacle Z = female contacts on plug and male contacts on receptacle
Cable mounted receptacles K/KE KS/KSE		
Panel mounted cable receptacles DK/DKE DKBE		
Panel mounted receptacles D DEU/DEE DB DBEU/DBEE DBP DBPU/DBPE DBPLU/ DBPLE DG/DGP DBPC WDE		
Panel mounted plugs SF SFU/SFE SFPU/SFPE		
		Exceptions Multipole high voltage Mixed high voltage

Part numbering

FISCHER CORE SERIES **BRASS**

Contact configuration	Options*	Cable clamp sets for cable mounted plugs & receptacles
056	130	+
056	130	Not applicable as panel mounted
▼	▼	▼
Three-digit number specific for each pin layout	Specific suffix corresponding to selected options	Below cable clamp sets should be ordered separately
	Housing color Natural chrome Anthracite	Multipole low voltage Triax Example: S 102 A056 - 130 +
	Contact block insulating material PEEK PTFE PBT	Clamp set ordering line E3 102.5/2.0 See page B2-42
	Contact type Solder Crimp PCB	Below cable clamp sets are included with connector Coax low voltage Coax high voltage Multipole high voltage Mixed high voltage Mixed coax
	Mechanical coding of the contact block	Shielded (S) or Environmental (E) cable clamp set diameter should be added to the connector part number separated by ø. Examples: for Shielded S clamp sets K 103 A002-600 ø6.2 or environmental E clamp sets KE 103 A002-600 ø6.2
	Clamp nut type & color	Insulating clamp set ø (104, 105 and 106 Sizes) should be added to the connector part number separated by ø and followed by UI (Unshielded Insulated). Example: S 104 A062-130 ø6.6 - UI
	Other options	

RELATED ITEMS

Accessories	Tooling
	
Example 102.785	Example TX00.240
Protective sleeve	Crimping tool
▼	▼
Cable bend reliefs Protective sleeves Soft caps Metal caps Spacers Washers Mounting nuts	Spanners / Wrenches Crimping tools Tools for crimp contacts and high voltage contacts

See *Accessories* section, page B 6-2.

See *Tooling* section, page B 6-19.

References	Multipole low voltage	Multipole high voltage	Coax low voltage	Coax high voltage	Triax	Mixed high voltage	Mixed coax	relevant information (page)
102 A 001			●					B3-22
102 A Z 002			●					B3-22
102 A 014					●			B4-18
102 A 017			●					B3-22
102 A Z 018				●				B3-34
102 A 021					●			B4-18
102 A Z 025				●				B3-34
102 A Z 051	●							B2-27
102 A Z 052	●							B2-27
102 A Z 053	● ¹⁾ ETHERNET							B2-27
102 A Z 054	●							B2-27
102 A Z 056	●							B2-27
102 A Z 059	●							B2-27
102 A 066	● ⁴⁾ SPE							B2-27
103 A Z 001			●					B3-22
103 A Z 002			●					B3-22
103 A 015					●			B4-18
103 A Z 023				●				B3-34
103 A 026			●					B3-22

¹⁾ Ethernet 100 Mbit/s²⁾ USB 2.0 480 Mbit/s³⁾ Ethernet 5 Gbit/s⁴⁾ SPE 1 Gbit/s⁵⁾ USB 3.2 Gen 2 10 Gbit/s

References	Multipole low voltage	Multipole high voltage	Coax low voltage	Coax high voltage	Triax	Mixed high voltage	Mixed coax	relevant information (page)
103 A Z 051	●							B2-28
103 A Z 052	●							B2-28
103 A Z 053	●							B2-28
103 A Z 054	●							B2-28
103 A Z 056	●							B2-28
103 A Z 057	●							B2-28
103 A Z 058	●							B2-28
103 A Z 062	●							B2-28
1031 A 009	● ⁵⁾ USB 3.2							B2-29
1031 A Z 010	●							B2-29
1031 A Z 012	●							B2-29
1031 A Z 015	● ²⁾ ETHERNET							B2-30
1031 A Z 019	●							B2-30
1031 A Z 029	● ³⁾ ETHERNET							B2-29
1031 A Z 105	●							B2-29
104 A 002			●					B3-23
104 A Z 010				●				B3-34
104 A Z 037	● ETHERNET ¹⁾ USB 2.0 ²⁾							B2-31

Contact configurations

FISCHER CORE SERIES **BRASS**

	References	Multipole low voltage	Multipole high voltage	Coax low voltage	Coax high voltage	Triax	Mixed high voltage	Mixed coax	relevant information (page)
104	A Z 040	●							B 2-31
104	A Z 051	●							B 2-31
104	A Z 053	●							B 2-31
104	A Z 054	●							B 2-31
104	A Z 055	●							B 2-32
104	A Z 056	●							B 2-32
104	A 060			●					B 3-23
104	A Z 062		●						B 2-60
104	A Z 065	●							B 2-31
104	A Z 066	● ⁶⁾ ETHERNET							B 2-32
104	A 078							●	B 5-15
104	A Z 083						●		B 5-22
104	A Z 086	●							B 2-33
104	A Z 087	●							B 2-31
104	A Z 092	●							B 2-33
104	A 093							●	B 5-15
104	A Z 104	● ⁷⁾ USB 2.0							B 2-32
104	A 124	●							B 2-33

⁶⁾ Ethernet 1 Gbit/s

⁷⁾ USB 2.0 480 Mbit/s

⁸⁾ Standard protocol for simultaneous transmission of audio and UHD-Video 18 Gbit/s

	References	Multipole low voltage	Multipole high voltage	Coax low voltage	Coax high voltage	Triax	Mixed high voltage	Mixed coax	relevant information (page)
104	A 130	●							B 2-33
104	A 131	●							B 2-32
104	A 135	● ⁸⁾ UHD-VIDEO							B 2-33
105	A Z 002			●					B 3-23
105	A Z 004				●				B 3-34
105	A Z 005				●				B 3-34
105	A 020						●		B 5-22
105	A 036						●		B 5-22
105	A Z 038	●							B 2-35
105	A Z 039		●						B 2-60
105	A Z 049				●				B 3-34
105	A Z 051	●							B 2-34
105	A Z 052	●							B 2-34
105	A Z 053	●							B 2-34
105	A Z 054	●							B 2-34
105	A 057		●						B 2-60
105	A Z 058	●							B 2-35
105	A 060						●		B 5-22

All dimensions and images shown are in millimeters and are for reference only.


FISCHER CORE SERIES **BRASS**

References	Multipole low voltage	Multipole high voltage	Coax low voltage	Coax high voltage	Triax	Mixed high voltage	Mixed coax	relevant information (page)
105 A Z 062	●							B 2-35
105 A Z 067	● ⁶⁾ ETHERNET							B 2-34
105 A Z 069	●							B 2-35
105 A 074							●	B 5-15
105 A 087	●							B 2-34
105 A 089							●	B 5-15
105 A Z 090			●					B 3-23
105 A Z 093	● ⁷⁾ AUDIO/ VIDEO							B 2-35
105 A 095							●	B 5-15
105 A Z 101	●							B 2-34
105 A Z 102	●							B 2-35
105 A Z 104	●							B 2-35
105 A 108				●				B 3-34
105 A Z 110	●							B 2-35
105 A 112						●		B 5-22
105 A Z 124	●							B 2-34
105 A 127	●							B 2-35

⁶⁾ Ethernet 1 Gbit/s⁷⁾ Standard protocol for simultaneous transmission of audio and video, up to 10.2 Gbit/s

References	Multipole low voltage	Multipole high voltage	Coax low voltage	Coax high voltage	Triax	Mixed high voltage	Mixed coax	relevant information (page)
106 A Z 003	●							B 2-36
106 A Z 007	●							B 2-36
106 A Z 013		●						B 2-60
106 A 014						●		B 5-22
106 A Z 015	●							B 2-36
106 A Z 017	●							B 2-36
106 A Z 018	●							B 2-36
106 A Z 019	●							B 2-36
107 A Z 003				●				B 3-37
107 A 004				●				B 3-37
107 A Z 013	●							B 2-37
107 A Z 015	●							B 2-37
107 A Z 017				●				B 3-34
107 A Z 018	●							B 2-37
107 A Z 023	●							B 2-37
107 A 034		●						B 2-60
107 A Z 051	●							B 2-37
107 A Z 052	●							B 2-37

PANEL CUT-OUTS



The dimension of panel cut-outs varies according to the body style and size of the panel mounted connector.

Refer to the tables aside and below for more details.

Check details in technical drawings on our web site:

www.fischerconnectors.com

PANEL MOUNTED PLUGS

Size	SF	SFU/SFE	SFPU /SFPE
	ø d		
102	9.1	9.1	9.1
103	12.1	12.1	12.1
1031	14.1	14.1	14.1
104	15.1	16.1	16.1
105	16.1	20.1	20.1
106	30.2	-	-
107	32.2	-	-

PANEL MOUNTED RECEPTACLES

Size	D	DEU DEE	DB	DBEU DBEE	DBP	DBPU DBPE	DBPLU DBPLE	DG DGP	DBPC	WDE
	ø d									
102	9.1	10.1 ¹⁾	9.1	9.1	9.1	9.1	10.1	9.1	9.1	9.1
103	12.1	14.1	12.1	14.1	12.1	14.1	14.1	12.1	12.1	12.1
1031	14.1	14.1	-	14.1	14.1	14.1	15.1	14.1	14.1	-
104	15.1	16.1	16.1	16.1	15.1	16.1	16.1	15.1	-	15.1
105	18.1	20.1	18.1	18.1	18.1	20.1	20.1	18.1	-	20.1
106	32.2	34.2	-	32.2	-	-	-	32.2	-	32.2
107	35.2	36.2	-	35.2	-	35.2	-	-	-	36.2

¹⁾ Coax High Voltage DEE 102 AZ 025: ø11.1 (see page B3-33).

PANEL MOUNTED CABLE RECEPTACLES

Size	DK	DKBE	DKE
	ø d		
102	9.1	12.1	10.1
103	12.1	15.1	14.1
1031	-	16.1	-
104	15.1	18.1	16.1
105	18.1	22.1	20.1
106	32.2	34.2	30.2
107	35.2	38.2	35.2

MATERIAL & SURFACE TREATMENTS

Metal parts

The standard Fischer Connectors shells are nickel plated brass with natural (silver) chrome finish. Anthracite finish is available as an option; see Options pages B2-35 and B3-26. Internal piece parts are nickel plated brass. When warranted by an extreme environment, in most cases stainless steel can be substituted for all metal parts.

Metal parts		Material			Finish	
		Designation	ISO	Standard	Designation	Standard
Shell (Housing), clamp nut, decorative slotted nut		Brass	CuZn39Pb3	CW614N / UNS C 38500	Chrome over Nickel	SAE-AMS2460
					Anthracite Nickel	SAE-AMS-QQ-N-290 / SAE-AMS2404
Plug body, cable clamp, inner sleeve, spacers and rings, nuts and washers		Brass	CuZn39Pb3	CW614N / UNS C 38500	Nickel	SAE-AMS-QQ-N-290 / SAE-AMS2404
Contacts	Male (solder)	Brass	CuZn39Pb3	CW614N / UNS C 38500	1 µm Gold over Nickel	MIL-DTL-45204D / Type 1 + ASTM B488
	Female, Male (crimp)	Bronze	CuSn4Zn4Pb4	CW456K / ASTM B 139 / UNS C 54400		

Other material and surface treatments are available on request.

Insulator and sealing

Contact blocks and other insulators for our standard connectors are manufactured from high performance engineering plastic materials. The standard materials of each connector series are listed under Electrical & Contact configurations in pages B2-2 through B5-2. Ceramics and other dielectrics are available on special order.

Insulator and sealing	International symbol	Flammability
Insulator	PEEK	UL 94 V-O
Insulator	PTFE - PBT	-
Interface O-rings (receptacles)	FPM (Viton®) / EPDM	-
Sealant material - IP68 (receptacles) - Hermetic	Silicon compound Epoxy compound	UL 94 V-O UL 94 HB
Cable sealing (plugs) - IP68	TPE-S	UL 94 HB

Our products are RoHs compliant and conform with the EC Directives 2011/65/EU & 2015/863/EU.

Elastomer seals

Sealed connectors are fitted with O-rings and cable sealing gaskets.

The standard materials are:

FPM (Viton®) for O-rings

TPE (Thermoplastic Elastomers) for cable seals, protective sleeves and strain reliefs.

Compound and trade name	Chemical name	Excellent resistance to
FPM (Viton®)	Fluoro Elastomer	Acids, weather, ozone, fuels, mineral and silicone oils, high vacuum, gamma rays
EPDM, EPM or EPR	Ethylene Propylene Diene Elastomer	Alcohol, weather, hot water, vapor, brake fluids, detergents, gamma rays
TPE-S, TPE-O (Thermoplastic Elastomer)	Styrene-Ethylene-Butadiene-Styrene	Very resistant, except to aromated and chlorinated hydrocarbons

Please note that as an elastomer reaches its lower temperature limit, it becomes rigid and loses the flexibility required for connector mating and unmating. If sealed connectors have to be manipulated at low temperatures, the O-rings in the mating area has to be of a material with a considerably lower temperature limit.

The elastomers listed below represent presently available materials, which Fischer Connectors can substitute when required by an application. Not all materials are available in all shapes and sizes so please check with us for details.

ENVIRONMENTAL & MECHANICAL DATA

Characteristic	Product type	Value	Standard
Sealing performance	Unsealed connectors (mated)	IP50	IEC 60529
	Plugs (mated) with general purpose sealed clamps ¹⁾	IP68 IP69	
	Receptacles "U" body style	IP68	
	Receptacles "E" body style	Hermetic: Tested: <10 ⁻⁸ mbar l/s IP69	IEC 60068-2-17 test Qk method 3, alternative b IEC 60529
Operating temperature range	See details on page A-9 and B1-16		IEC 60512-6-11 i+j / IEC 60068-2-14-Nb
Corrosion resistance ³⁾		Salt mist, 1,000 hours, 5% salt solution, 35°C	IEC 60068-2-11 test Ka MIL-STD-202 method 101 EIA-364-26
Endurance		10,000 mating cycles	IEC 60512-9-1 / EIA-364-09
Vibration		10 to 2000 Hz, 1.5 mm or 15g, 12 sweep cycles per axis, 20 minutes per 10-2000-10 Hz sweep cycle, no discontinuity > 1us	MIL-STD-202 method 204 condition B
Radiation resistance ²⁾	Unsealed connectors	PEEK: 10 ⁷ Gy(=1000M Rads)	
	Sealed receptacles "E"	FPM (Viton®) O-rings 10 ⁵ Gy (=10M Rads)	

¹⁾ The sealing performance can be affected by the long term quality of the cable.

²⁾ For information only. Not tested by Fischer Connectors.

³⁾ Plug and receptacle in mated position or with cap when unmated. For Brass connectors only.

Aluminum version not recommended for Marine use. Preserved mechanical and electrical functionality. Visual aspect might be altered.

Most of our connectors are completely sterilizable in autoclave, Cidex®, EtO, gamma radiation, Steris® or Sterrad®. Please contact us for more details. For more information visit: www.fischerconnectors.com.

ELECTRICAL DATA


Characteristic	Contact size	Typical values	Standard
Contact resistance 10,000 mating cycles	ø 0.5 mm	5.0 mΩ	IEC 60512-2-1, Test 2a IEC 60512-2-2, Test 2b
	ø 0.7 mm	5.0 mΩ	
	ø 0.9 mm	4.0 mΩ	
	ø 1.3 mm	2.5 mΩ	
	ø 1.6 mm	2.5 mΩ	
	ø 2.3 mm	2.5 mΩ	
	ø 3.0 mm	1.5 mΩ	
Insulation resistance		> 10 ¹⁰ Ω	IEC 60512-3-1-3a Method C

All dimensions and images shown are in millimeters and are for reference only.

OPERATING TEMPERATURES

The temperature ranges quoted by the manufacturers of the plastic materials are usually the absolute maximum values. When exposed to the mechanical and electrical stresses present in a connector, these values are often unrealistic. If a composite connector system including accessories is used, then the item

with the lowest temperature performance will dictate the operating temperature limit of the system. The table below shows our recommended operating temperature ranges.

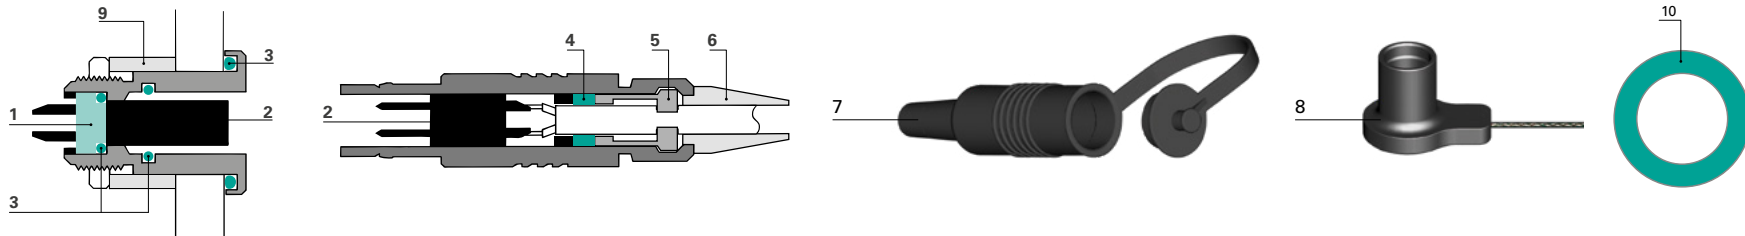

Ref.	Component	Material	
1	Sealant	"U" Type	
		"E" Type	
2	Insulator	PEEK	
		PTFE (Teflon®)	
		PBT	
3	Standard O-rings	FPM (Viton®)	
	Interface O-rings (option)	EPDM	
4	Cable clamp seal	TPE	
5	Cable clamp	Standard	Brass
		High Voltage Connectors	POM
6	Cable strain relief	TPE	
		405 only	
7	Protective Boots	TPE	
8	Sealing Caps	Metallic	Plug: Brass with FPM O-ring
			Receptacle Brass with NBR O-ring
		Plastic	POM with FPM O-ring
		Soft Caps	TPE
9	Panel Spacer	Aluminium	
10	Color Coding Washer	PP	

Operating temperatures	
	-55°C to +200°C
	-65°C to +150°C
	-65°C to +250°C
	-65°C to +160°C
	-65°C to +135°C
	-20°C to +200°C ¹⁾
	-50°C to +160°C ²⁾
	-70°C to +130°C
	-40°C to +100°C
	-60°C to +100°C
	-60°C to +180°C
	-60°C to +100°C
	-20°C to +200°C ¹⁾
	-30°C to +110°C ¹⁾
	-20°C to +100°C ¹⁾
	-55°C to + 85°C
	-20°C to + 60°C

¹⁾ Minimum mating temperature: 0°C.


²⁾ Minimum mating temperature: -20°C.



MECHANICAL CODING

For easy connect / disconnect operations

Our contact blocks are engineered with arc-shape metal guides, which ensure precise alignment of connectors during the mating process.



This guiding mechanism provides:

- Increased safety and user friendliness by preventing misconnection.
- Easy mating cycles, can be blind-mated.
- Increased equipment life span by optimally protecting the contacts.

Keying codes options

All multipole body styles are mechanically coded. Code 1 is the standard, but other codes can be requested.

	Code 1	Code 2	Code 3
Receptacle			
Plug			

Other keying codes are available on request, please contact us.
Images are here for information only and do not reflect always the reality.

Keying codes options

All multipole body styles are mechanically coded. Code 1 is the standard, but other codes can be requested.

All dimensions and images shown are in millimeters and are for reference only.

B1-18 Technical Specifications


B2

CHAPTER



FISCHER CORE SERIES **BRASS** **MULTIPOLE**

- LOW VOLTAGE B2-2
- HIGH VOLTAGE B2-52

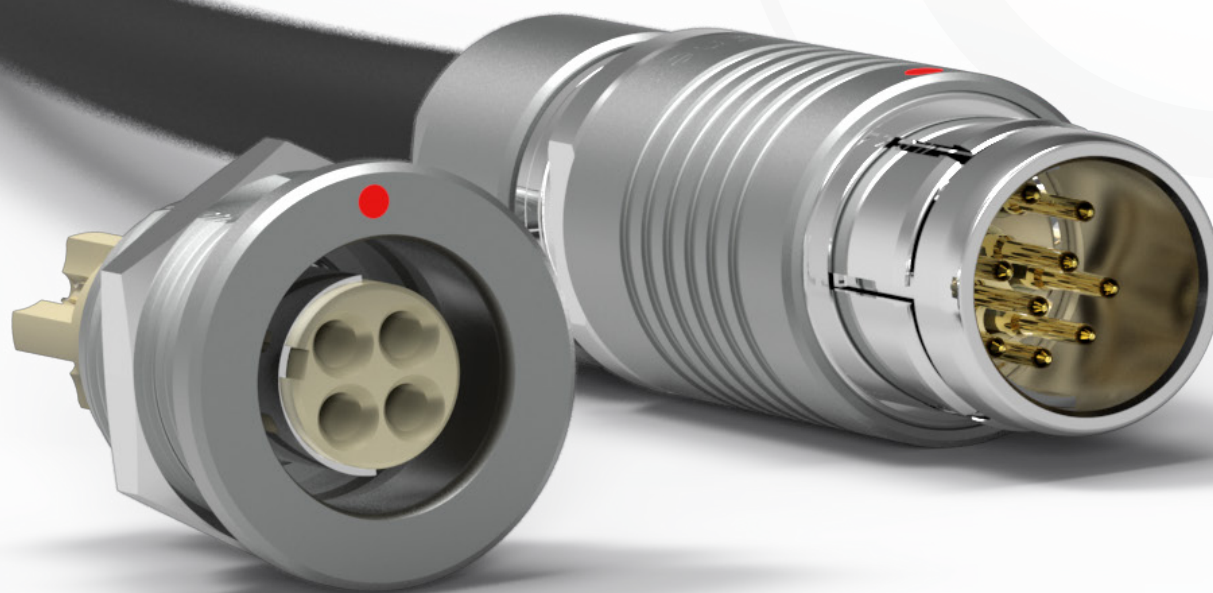

MULTIPOLE
LOW & HIGH
VOLTAGE

MULTIPOLE LOW VOLTAGE



PLUGS



CABLE MOUNTED

- Body styles (S/SC; SOV; SA; SV; SS/SSC; WSO) B 2-3
- Technical dimensions B 2-4



PANEL MOUNTED

- Body styles (SF; SFU/E; SFPU/E)..... B 2-17
- Technical dimensions B 2-18

RECEPTACLES



CABLE MOUNTED

- Body styles (K/KE; KS/KSE) B 2-7
- Technical dimensions B 2-8



PANEL MOUNTED

- Body styles (D; DEU/E; DB; DBEU/E; DBP; DBPU/E; DBPLU/E; DG; DGP; DBPC; WDE)..... B 2-9
- Technical dimensions B 2-11



PANEL MOUNTED CABLE

- Body styles (DKBE; DK; DKE) B 2-20
- Technical dimensions B 2-21

FOR ALL MULTIPOLE LOW VOLTAGE

- Electrical & contact configurations B 2-23
- Options B 2-38
- Cable clamp sets B 2-42
- Accessories B 6-2
- Tooling B 6-19
- Technical information..... B 1-13
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

PLUGS**CABLE
MOUNTED**


Body style		S	SC	SOV	SA	SV	SS	SSC	WSO	References to detailed information
Protection	Unsealed (IP50)	•	•	•	•	•	•	•	•	Sealing categories, page A-6
	Sealed up to IP68	•	•	•	•	•	•	•	•	
Locking system	Friction			•						Locking systems, page A-5
	Push-pull	•			•	•	•		•	
	Quick-release		•					•		
	Lanyard				•					
	Tamperproof					•				
Contacts	Crimp	•	•	•	•	•	•	•	•	Electrical & configurations, page B2-23
	Solder	•	•	•	•	•	•	•	•	
Housing color	Natural chrome	•	•	•	•	•	•	•	•	Options, page B2-35
	Anthracite	•	•	•	•		•	•	•	
Design	Shortened body						•	•		Body styles, chapter B1-2
	Straight	•	•	•	•	•	•	•		
	Right-angle						•	•	•	
Cabling	Cable clamp sets	•	•	•	•	•			•	Cable clamp sets, page B2-39
	Overmoldable						•	•		
	Heat shrinkable						•	•		
Accessories	Cable bend reliefs	•	•	•	•	•			•	Accessories, section B6-2
	Protective sleeves	•	•	•						
	Sealing caps	•	•	•	•	•	•	•	•	
Size	102 Size	•	•	•	•	•	•	•	•	Technical dimensions, page B2-4 For more information visit our website www.fischerconnectors.com/technical
	103 Size	•	•	•	•	•	•	•	•	
	1031 Size	•	•	•	•	•	•	•	•	
	104 Size	•	•	•	•	•	•	•	•	
	105 Size	•	•	•	•	•	•	•	•	
	106 Size	•				•				
	107 Size	•				•				

PLUGS

CABLE MOUNTED

S/SC


BODY STYLES

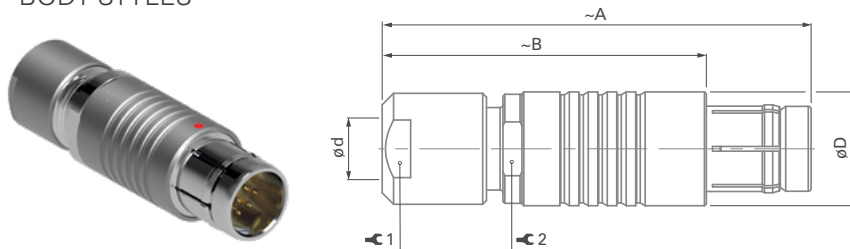

Size	A	B	D	d max		1	Torque 1 [Nm]	2
				Unsealed	Sealed			
102	36	26	9	4.7	4.3	7	0.6	7
103	46	35	12	6.7	6.2	10	1.0	10
1031	48	38	13	7.2	6.7	12	1.5	11
104	50	38	15	9.1	8.7	12	2.0	13
105	62	47	18	10.7	10.7	15	3.5	16
106	80	55	28	19.2	19.2	22	8.0	-
107	110	85	34	22.7	22.7	32	10.0	32

SOV

BODY STYLE

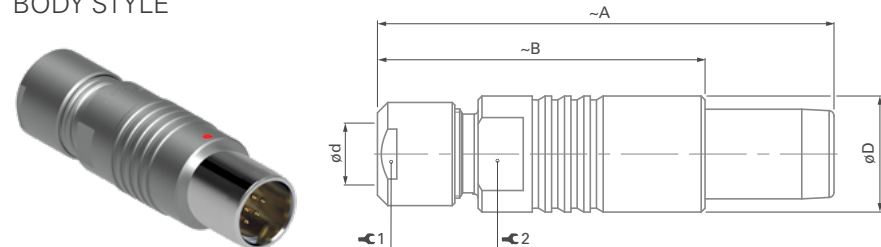

Size	A	B	D	d max		1	Torque 1 [Nm]	2
				Unsealed	Sealed			
102	36	26	9	4.7	4.3	7	0.6	7
103	46	35	12	6.7	6.2	10	1.0	10
1031	48	38	13	7.2	6.7	12	1.5	11
104	50	38	15	9.1	8.7	12	2.0	13
105	62	47	18	10.7	10.7	15	3.5	16
106	Please contact us for additional information							
107								


Technical dimensions

FISCHER CORE SERIES **BRASS** – **MULTIPOLE LOW VOLTAGE**

PLUGS


CABLE MOUNTED

SA BODY STYLE

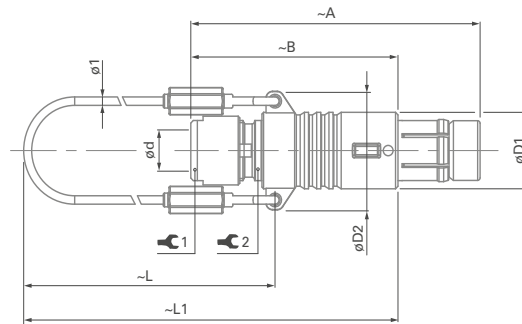

Size	A	B	D1	D2	L	L1	d max		Torque 1 [Nm]	1	2
							Unsealed	Sealed			
102	36	26	9	14	50	65	4.7	4.3	0.6	7	7
103	46	35	12	17	60	77	6.7	6.2	1.0	10	10
1031	48	38	13	18	55	75	7.2	6.7	1.5	12	11
104	50	38	15	21	65	84	8.7	8.7	2.0	12	13
105	62	47	18	25	70	94	10.7	10.7	3.5	15	16
106	Please contact us for additional information										
107											

SV BODY STYLE

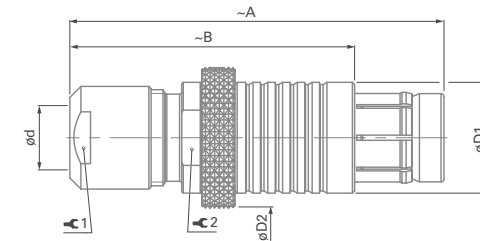

Size	A	B	D1	D2	d max		Torque 1 [Nm]	1	2
					Unsealed	Sealed			
102	36	26	9	11	4.7	4.3	0.6	7	-
103	46	35	12	13	6.7	6.2	1.0	10	-
1031	Please contact us for additional information								
104	50	38	15	20	8.7	8.7	2.0	12	13
105	62	47	18	22	10.7	10.7	3.5	15	16
106	80	55	30	35	19.2	19.2	8.0	22	-
107	110	85	34	38	22.7	22.7	10.0	32	32

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket.

Tests have to be made to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.


All dimensions and images shown are in millimeters and are for reference only.

PLUGS

CABLE MOUNTED

SS/SSC

BODY STYLES

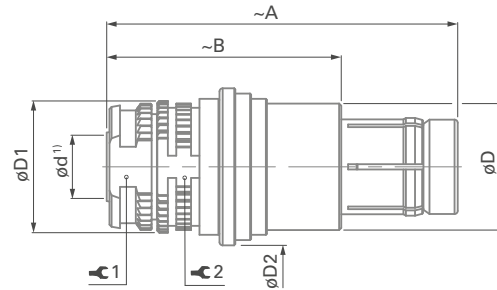


Size	A	B	D	D1	D2	d max ¹⁾	1	Torque 1 [Nm]	2
102	30	20	9.0	9.5	12.0	3.8	7	0.4 – 0.6	8
103	33	22	12.0	12.5	15.0	6.0	10	0.8 – 1.0	11
1031	33	23	12.4	13.0	15.5	6.2	10	0.8 – 1.0	11
104	38	26	15.0	15.3	18.0	8.0	12	1.5 – 2.0	13
105	44	29	18.0	18.4	21.2	10.0	15	1.5 – 2.0	16
106	Please contact us for additional information								
107									

¹⁾ Max. cable diameter below shield.

WSO

BODY STYLE

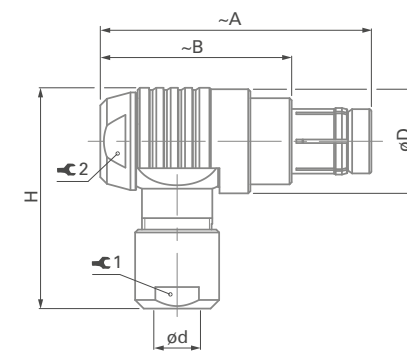


Size	A	B	D	H	d max UnsealedSealed			Torque 1 [Nm]		Torque 2 [Nm]
102	33	23	12	25	4.7	4.3	7	0.6	8	1.0
103	38	27	15	31	6.7	6.2	10	1.0	11	1.3
1031	39	29	17	33	7.2	6.7	12	1.5	12	2.0
104	45	32	19	37	8.7	8.7	12	2.0	14	2.5
105	53	38	23	45	10.7	10.7	15	3.5	17	3.5
106	Please contact us for additional information									
107										

WSO is available for different cable orientations. When ordering, choose which suffix to use in cable orientations figure.

Example: WSO 102 A056-130+ with standard down cable orientation
WSO 102 A056-130-9H with left cable orientation

Cable orientations: view from the back



RECEPTACLES**CABLE
MOUNTED**


Body style		K	KE	KS	KSE	References to detailed information
Protection	Unsealed (IP50)	•		•		Sealing categories, page A-6
	Sealed up to IP68		•		•	
Contacts	Crimp	•	•	•	•	Electrical & contact configurations, page B2-23
	Solder	•	•	•	•	
Housing	Natural chrome	•	•	•	•	Options, page B2-35
	Anthracite	•	•	•	•	
	Shortened body			•	•	
Design	Straight			•	•	Body styles, chapter B 1-3
	Right-angle			•	•	
Cabling	Cable clamp sets	•	•			Cable clamp set, page B2-39
	Overmoldable			•	•	
	Heat shrinkable			•	•	
Accessories	Cable bend reliefs	•	•			Accessories, section B6-2
	Protective sleeves	•	•			
	Sealing caps	•	•	•	•	
Size	102 Size	•	•	•	•	Technical dimensions, page B2-8 For more information visit our website www.fischerconnectors.com/technical
	103 Size	•	•	•	•	
	1031 Size	•	•	•	•	
	104 Size	•	•	•	•	
	105 Size	•	•	•	•	
	106 Size	•	•			
	107 Size	•	•			

RECEPTACLES

CABLE MOUNTED

K/KE


BODY STYLES

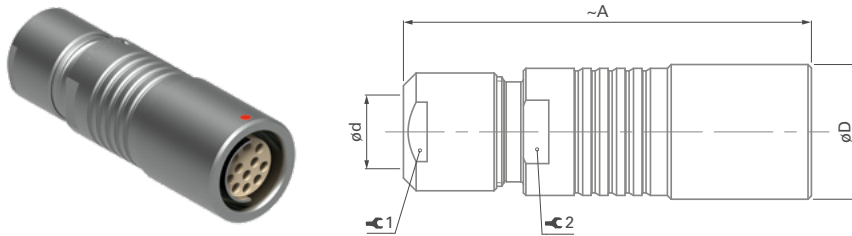

Size	A	D	d max		1	Torque 1 [Nm]	2
			Unsealed	Sealed			
102	35	10	4.7	4.3	7	0.6	7
103	43	13	6.7	6.2	10	1.0	10
1031	46	13.5	7.2	6.7	12	1.5	11
104	50	16	9.1	8.7	12	2.0	13
105	60	19	10.7	10.7	15	3.5	16
106	79	33	19.2	19.2	25	8	25
107	105	36	22.7	22.7	32	10	32

KS/KSE

BODY STYLES

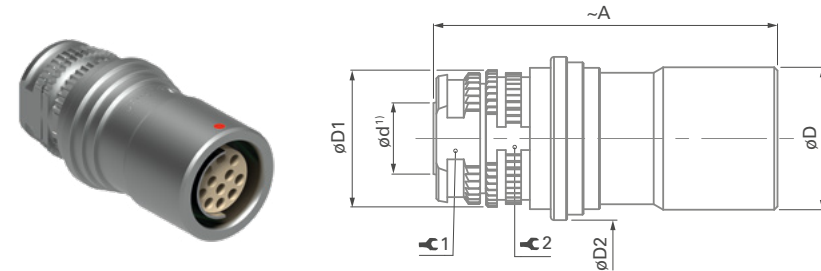

Size	A	D	D1	D2	d max	1	Torque 1 [Nm]	2
102	28	10.0	10.0	12.0	3.8	7	0.4 – 0.6	8
103	32	13.0	13.0	15.0	6.0	10	0.8 – 1.0	11
1031	31	13.5	13.5	15.5	6.2	10	0.8 – 1.0	11
104	35	16.0	16.0	18.0	8.0	12	1.5 – 2.0	13
105	43	19.0	18.0	21.2	10.0	15	1.5 – 2.0	16
106	Please contact us for additional information							
107								

¹⁾ Max. cable diameter below shield.

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket.

Tests have to be made to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

RECEPTACLES

PANEL
MOUNTED

PANEL MOUNTED									
Body style		D	DEU	DEE	DB	DBEU	DBEE	DBP	References to detailed information
Protection	Unsealed (IP50)	●			●			●	Sealing categories, page A-6
	Sealed up to IP68		●	●		●	●		
	Hermetic			●			●		
Contacts	Crimp	●			●			●	Electrical & contact configurations, page B2-23
	Solder	●	●	●	●	●	●	●	
	PCB	●	●	●	●	●	●	●	
Housing color	Natural chrome	●	●	●	●	●	●	●	Options, page B2-38
	Anthracite	●	●	●	●	●	●	●	
Design	Right-angle								Body styles, chapter B1-3
	Flush	●	●	●				●	
	Front-projecting				●	●	●		
	Bulkhead feedthrough								
Assembly	Front-mounting	●	●	●	●	●	●		
	Rear-mounting							●	
Accessories	Sealing caps	●	●	●	●	●	●	●	Accessories, section B6-2
	Spacers		●	●					
	Color-coded washers	●			●			●	
	Grounding washers	●	●	●	●	●	●	●	
	Locking washers	●	●	●	●	●	●	●	
Size	102 Size	●	●	●	●	●	●	●	Technical dimensions, page B2-11
	103 Size	●	●	●	●	●	●	●	
	1031 Size	●	●	●	●	●	●	●	
	104 Size	●	●	●	●	●	●	●	For more information visit our website www.fischerconnectors.com/technical
	105 Size	●	●	●	●	●	●	●	
	106 Size	●		●			●		
	107 Size	●		●			●		

RECEPTACLES**PANEL
MOUNTED**

Body style		DBPU	DBPE	DBPLU	DBPLE	DG	DGP	DBPC	WDE	References to detailed information
Protection	Unsealed (IP50)					•	•	•		Sealing categories, page A-6
	Sealed up to IP68	•	•	•	•				•	
	Hermetic		•		•				•	
Contacts	Crimp					•				Electrical & contact configurations, page B 2-23
	Solder	•	•	•	•	•				
	PCB	•	•	•	•		•	•		
Housing color	Natural chrome	•	•	•	•	•	•	•	•	Options, page B 2-38
	Anthracite	•	•	•	•	•	•	•		
Design	Right-angle							•		Body styles, chapter B 1-3
	Flush	•	•			•	•	•	•	
	Front-projecting			•	•	•	•		•	
	Bulkhead feedthrough								•	
Assembly	Front-mounting					•	•		•	
	Rear-mounting	•	•	•	•	•	•	•		
Accessories	Sealing caps	•	•	•	•	•	•	•	•	Accessories, section B 6-2
	Spacers								•	
	Color-coded washers					•	•	•		
	Grounding washers	•	•	•	•	•	•	•		
	Locking washers	•	•	•	•	•	•	•		
Size	102 Size	•	•	•	•	•	•	•	•	Technical dimensions, page B 2-13 For more information visit our website www.fischerconnectors.com/technical
	103 Size	•	•	•	•	•	•	•	•	
	1031 Size	•	•	•	•	•	•	•		
	104 Size	•	•	•	•	•	•		•	
	105 Size	•	•	•	•	•	•		•	
	106 Size					•	•		•	
	107 Size		•						•	

For WDE 106 the interface is not sealed (no interface O.-ring).

Technical dimensions


FISCHER CORE SERIES **BRASS** – **MULTIPOLE LOW VOLTAGE**

RECEPTACLES

PANEL MOUNTED

D

BODY STYLE




Size	A	B max.	C1	D	M		Torque [Nm]
102	19	9	1.5	11	9x0.5	11	1.3
103	23	8	1.5	14	12x1	14	2.5
1031	25	10	2.0	16	14x1	17	3.0
104	25	11	2.2	19	15x1	17	4.0
105	32	15	2.0	22	18x1	22	6.0
106	50	18	3.0	37	32x1	TX00.106	15
107	46	18	4.0	40	35x1	TX00.107	16

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface under the nut.
Tests have to be made to evaluate the exact values.

DEU/DEE

BODY STYLES




Size	A	B min / max.	C1	D	M	 1	Torque 1 [Nm]	 2
102	20	8/10	2.5	14	9x0.5	11	1.3	11
103	23	0/12	3.0	18	14x1	17	3.0	14
1031	25	0/12	3.0	19	14x1	17	3.0	15
104	25	0/15	4.0	22	16x1	19	4.5	17
105	33	10.5/18	4.0	27	20x1	25	6.5	-
106	50	19.3/24	5.0	41	32x1	TX00.106	15	-
107	47	19.5/22	5.0	45	35x1	TX00.107	16	-

All dimensions and images shown are in millimeters and are for reference only.

RECEPTACLES**PANEL
MOUNTED****DB**


BODY STYLE

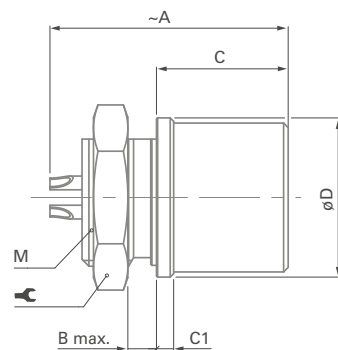

Size	A	B max.	C	C1	D	M		Torque [Nm]
102	18	3	11.0	1.0	11	9x0.5	11	1.3
103	21	4	11.5	1.5	14	12x1	14	2.5
1031	Please contact us for additional information							
104	26	3	14.5	2.5	19	16x1	19	4.5
105	33	7	19.0	2.0	22	18x1	22	6.0
106	Please contact us for additional information							
107								

DBEU/DBEE

BODY STYLES



Size	A	B max.	C	C1	D	M		Torque 1 [Nm]	
102	20	3.5	10.2	2.5	14	9x0.5	11	1.3	11
103	23	4.0	13.0	3.0	18	14x1	17	3.0	14
1031	24	4.0	12.0	3.0	19	14x1	17	3.0	15
104	30	3.5	16.0	4.0	22	16x1	19	4.5	17
105	32	5.0	19.0	4.0	27	18x1	22	6.0	22
106	50	6.5	25.5	7.0	40	32x1	TX00.106	15	-
107	47	5.0	24.0	5.0	45	35x1	TX00.107	16	38


Torque [Nm] are recommended values that may be influenced by the quality of the panel surface under the nut.
Tests have to be made to evaluate the exact values.

RECEPTACLES

PANEL MOUNTED

DBP

BODY STYLE

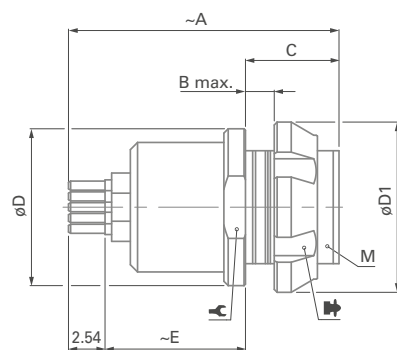


Size	A	B max.	C	D	D1	E	M		¹⁾	Torque [Nm]
102	20	3.5	6.5	11	12	10.0	9x0.5	10	TC00.000	1.3
103	23	4.0	8.0	14	15	12.0	12x1	-	TF00.001	2.5
1031	23	3.0	7.0	16	18	13.0	14x1	-	TG00.001	3.0
104	26	5.0	9.0	19	19	11.5	15x1	-	TK00.000	4.0
105	30	12.0	17.0	22	23	10.0	18x1	-	TP00.011	6.0
106	Please contact us for additional information									
107										

¹⁾ Assembly tool for decorative slotted nut, see Tooling section, page B 6-20, for details.

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface under the nut.
Tests have to be made to evaluate the exact values.

DBPU/DBPE


BODY STYLES

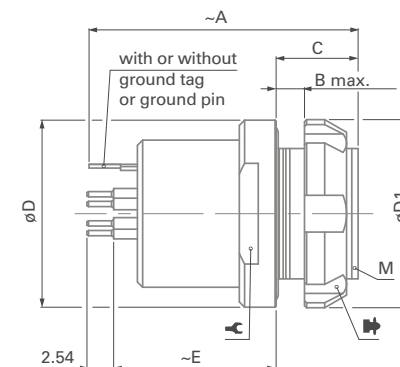

Size	A	B max.	C	D	D1	E	M		¹⁾	Torque [Nm]
102	20	3.5	6.5	14	12	11.5	9x0.5	11	TC00.000	1.3
103	26	4.0	7.8	18	18	15.5	14x1	15	TG00.001	3.0
1031	23	3.0	7.0	19	18	13.0	14x1	15	TG00.001	3.0
104	26	4.0	8.0	22	20	15.5	16x1	17	TK00.002	4.5
105	30	5.0	10.0	27	25	18.0	20x1	-	TP00.005	6.5
106	Please contact us for additional information									
107										

RECEPTACLES**PANEL
MOUNTED****DBPLU/DBPLE**

BODY STYLES

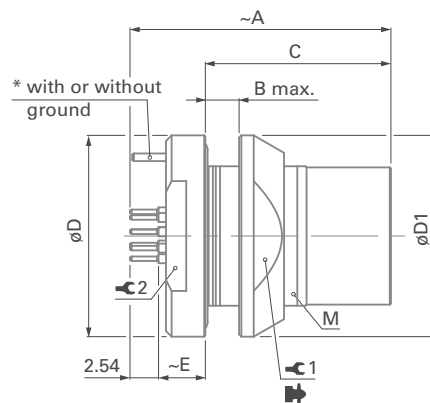

Size	A	B max.	C	D	D1	E	M	 ¹⁾		Torque 1 [Nm]	
102	21	4.5	14.2	14	13	3.6	10x0.5	TC00.007	11	1.5	11
103	24	5.0	16.5	18	18	4.2	14x1	TG00.001	15	3.0	15
1031	23	5.5	16.0	19	20	4.2	15x1	TK00.000	17	4.0	15
104	27	6.5	18.5	22	20	5.0	16x1	TK00.002	17	4.5	17
105	31	8.0	22.5	27	25	5.5	20x1	TP00.005	22	6.5	22
106	Please contact us for additional information										
107											

* – Pin for PCB contacts versions; all Sizes.


– Tag for solder contact versions; Sizes 103 to 107.

– Barrel for solder contact versions; Size 102.

¹⁾ Assembly tool for decorative slotted nut, see Tooling section, page B 6-20 , for details.

DG/DGP

BODY STYLES

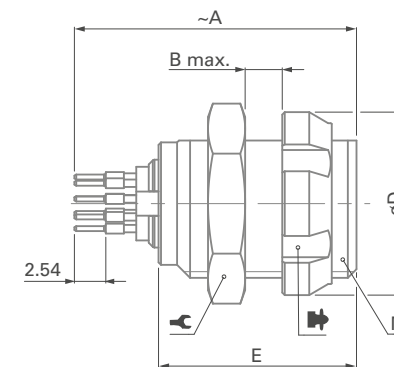


Size	A	B max.	D	E	M		 ¹⁾	Torque [Nm]
102	20	6	12	14	9x0.5	11	TC00.000	1.3
103	23	7	15	15	12x1	14	TF00.001	2.5
1031	23	7	18	18	14x1	17	TG00.001	3.0
104	26	9	19	18	15x1	17	TK00.000	4.0
105	30	15	23	24	18x1	22	TP00.011	6.0
106	Please contact us for additional information							
107								

RECEPTACLES

PANEL MOUNTED

DBPC

BODY STYLE

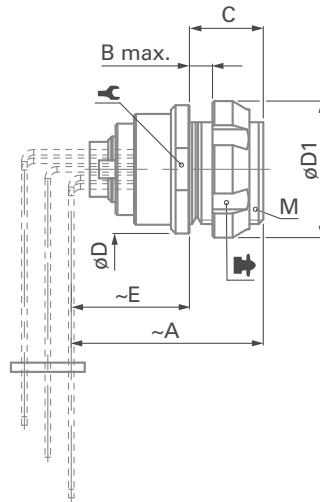



Size	A	B max.	C	D	D1	E ¹⁾	M			Torque [Nm]
102	20.0	3.5	6.5	11	12	13	9x0.5	10	TC00.000	1.3
103	22.0	4.0	8.0	14	15	13	12x1	-	TF00.001	2.5
1031	21.5	3.0	7.0	16	18	14	14x1	-	TG00.001	3.0

¹⁾ Please refer to online technical drawings at www.fischerconnectors.com/technical for precise value and layout dimensions.

²⁾ Assembly tool for decorative slotted nut, see Tooling section, page B 6-20, for details.

DBPC

MOUNTING CLAMP

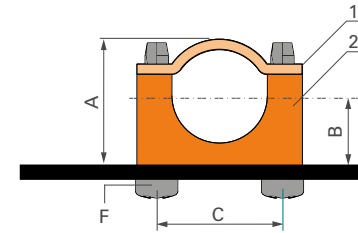

- Enables mounting directly to PCB with two screws
- Improves grounding of body to the PCB

Size	A	B	C	E	F	Part Number
102	11.5	6.0	12	3.8	ø 2.2x13	102.1943
103	15.2	8.2	16	4.9	ø 2.9x16	103.2253
1031	15.2	8.2	16	4.9	ø 2.9x16	103.2253


Material:

1 - Nickel plated brass copper


2 - PBT

FEEDTHROUGH**PANEL
MOUNTED****WDE : 102, 103 & 104 SIZE**


BODY STYLE

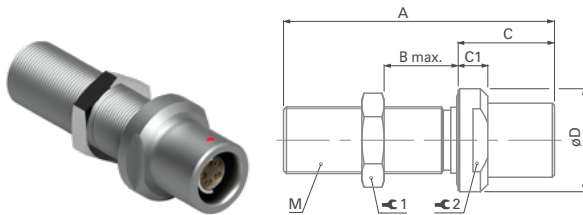**WDE : 105 SIZE**

BODY STYLE

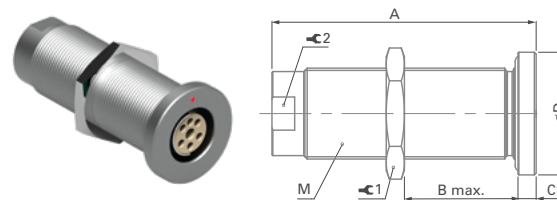**WDE : 106 & 107 SIZE¹⁾**

BODY STYLE

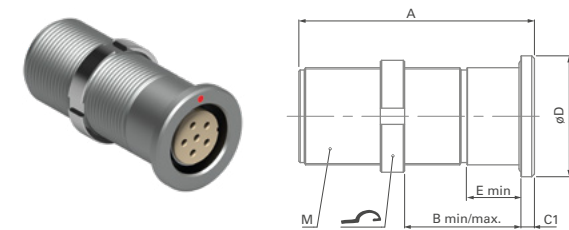

Size	A	B min/max	C	C1	D	E min	M	1 2)	Torque 1 [Nm]	2
102	39	23	13	4	14	-	9x0.5	11	1.3	11
103	40	23	14	4	17	-	12x1	14	2.5	14
1031	Please contact us for additional information									
104	40	21	16	4	22	-	15x1	17	4.0	17
	62	47	-	4	27	-	20x1	25	6.5	17
106^{1) 3)}	74	30/39	-	12	42	30	32x1	TX00.106	15	-
107¹⁾	92	20/76	-	5	45	20	36x1	TX00.107	17	-

The bulkhead feedthrough connector allows the passing of electrical signals and power through a panel via two cable plugs.

The "AZ" version of the feedthrough accepts a type "A" plug on the flange side and a type "Z" plug on the threaded end, which is typically oriented toward the interior of the chassis. In the version "ZA", the connections "A" and "Z" are inverted.

Dimension "B max" specifies the maximum panel thickness. For panels thinner than the unthreaded section "E min", we can provide spacers as shown in Accessories chapter B 6.

¹⁾ Feedthroughs of sizes 106 and 107 are supplied with slotted nuts. For nuts dimensions see Accessories section B 6-2.

²⁾ Assembly tool for side slotted nut, see Tooling section, section B 6-20, for details.

³⁾ For Size WDE 106 the interface is not sealed (no interface O-ring).


PLUGS

PANEL
MOUNTED

Body style		SF	SFU	SFE	SFPU	SFPE	References to detailed information
Protection	Unsealed (IP50)	•					Sealing categories, page A-6
	Sealed up to IP68		•	•	•	•	
	Hermetic			•		•	
Contacts	Crimp	•					Electrical & contact configurations, B 2-23
	Solder	•	•	•	•	•	
	PCB	•	•	•	•	•	
Housing color	Natural chrome	•	•	•	•	•	Options, page B 2-38
	Anthracite	•	•	•	•	•	
Assembly	Front-mounting	•	•	•			Body style selection, chapter B 1-2
	Rear-mounting				•	•	
Accessories	Sealing caps	•	•	•	•	•	Accessories, section B 6-2
	Spacers						
	Color-coded washers	•					
	Insulating washers	•					
	Grounding washers	•	•	•			
	Locking washers	•	•	•	•	•	
Size	102 Size	•	•	•	•	•	Technical dimensions, page B 2-18 For more information visit our website www.fischerconnectors.com/technical
	103 Size	•	•	•	•	•	
	1031 Size	•	•	•	•	•	
	104 Size	•	•	•	•	•	
	105 Size	•	•	•	•	•	
	106 Size	•					
	107 Size	•					

PLUGS**PANEL
MOUNTED****SF**


BODY STYLE



Size	A	B max.	C	C1	D	M		Torque [Nm]
102	20.0	3.5	11.0	1.0	10	9x0.5	11	1.3
103	23.5	3.0	12.5	1.5	14	12x1	14	2.5
1031	26.0	4.0	12.0	2.0	16	14x1	17	3.0
104	28.0	3.0	14.0	2.0	18	15x1	17	4.0
105	30.5	5.5	16.8	1.2	22	16x1	19	4.5
106	42.5	5.5	27.5	2.5	34	30x1	TX00.106	14
107	50.0	6.0	28.0	3.0	36	32x1	TX00.106	15

SFU/SFE

BODY STYLES

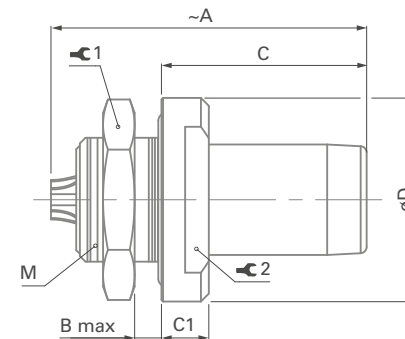


Size	A	B max.	C	C1	D	M		Torque 1 [Nm]	
102	21	2.5	13.0	3.0	13	9x0.5	11	1.3	9
103	26	5.0	14.0	3.0	17	12x1	14	2.5	12
1031	26.5	4.0	13.7	3.7	19	14x1	17	3.0	12
104	28	7.5	15.5	3.5	22	16x1	19	4.5	17
105	32	6.0	19.0	4.0	27	20x1	25	6.5	-
106	Please contact us for additional information								
107									

PLUGS

PANEL MOUNTED

SFPU/SFPE

BODY STYLES

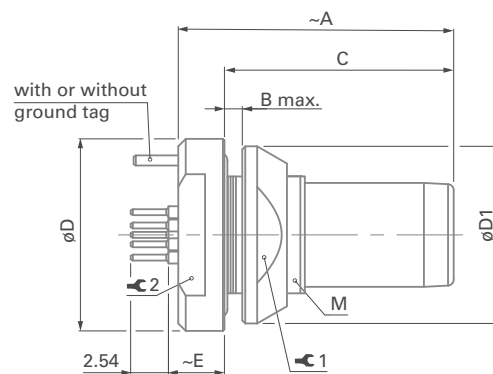

Size	A	B max.	C	D	D1	E	M	Y ₁	Torque 1 [Nm]	Y ₂
102	18.5	2.5	15.4	13	12	3.8	9x0.5	10	1.3	10
103	22.0	4.0	18.5	17	16	4.5	12x1	13	2.5	12
1031	21.5	4.0	18.0	19	18	4.5	14x1	15	3.0	15
104	25.5	6.0	22.0	22	20	4.2	16x1	17	4.5	17
105	29.0	5.0	25.0	27	25	5.0	20x1	22	6.5	19
106	Please contact us for additional information									
107										

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface under the nut. Tests have to be made to evaluate the exact values.

RECEPTACLES**PANEL**
MOUNTED CABLE

Body style		DKBE	DK	DKE	References to detailed information
Protection	Unsealed (IP50)		•		Sealing categories, section A-6
	Sealed up to IP68	•		•	
Contacts	Crimp	•	•	•	Electrical & contact configurations, page B 2-23
	Solder	•	•	•	
Housing color	Natural chrome	•	•	•	Options, page B 2-38
	Anthracite	•	•	•	
Design	Flush		•		
	Front-projecting	•		•	
Assembly	Panel mounted	•	•	•	Body styles, chapter B 1-3
	Front-mounting		•	•	
	Rear-mounting	•			
	Cable clamp sets	•	•	•	Cable clamp sets, page B 2-42
Accessories	Cable bend reliefs	•	•	•	Accessories, section B 6-2
	Sealing caps	•	•	•	
	Spacers			•	
	Color-coded washers	•	•		
	Insulating washers				
	Grounding washers	•	•	•	
	Locking washers	•	•	•	
Size	102 Size	•	•	•	Technical dimensions, page B 2-21
	103 Size	•	•	•	
	1031 Size	•			
	104 Size	•	•	•	
	105 Size	•	•	•	
	106 Size	•	•	•	
	107 Size	•	•	•	


For more information visit our website
www.fischerconnectors.com/technical

RECEPTACLES

PANEL REAR MOUNTED CABLE

DKBE

BODY STYLE

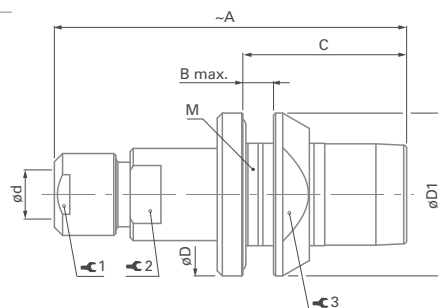

Size	A	B max.	C	D	d max	D1	M	1	Torque 1 [Nm]	2	3	Torque 3 [Nm]
102	35	3.5	16.0	16	4.3	16	12x1	7	0.6	7	13	2.5
103	43	4.0	19.0	19	6.2	20	15x1	10	1.0	10	17	4.0
1031	46	4.0	18.0	21	6.7	20	16x1	12	1.5	11	17	4.5
104	50	5.0	22.5	23	8.7	23	18x1	12	2.0	13	20	6.0
105	60	5.0	26.0	28	10.7	27	22x1	15	3.5	16	24	8.0
106	101	6.5	32.0	41	19.2	40	34x1	25	8.0	25	36	15
107	105	8.0	34.0	45	22.7	45	38x1	32	10.0	30	40	18

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable.


Tests have to be made to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

¹⁾ Cable assembly operation possible only after housing mounted on panel


PANEL FRONT MOUNTED CABLE

DK


BODY STYLE

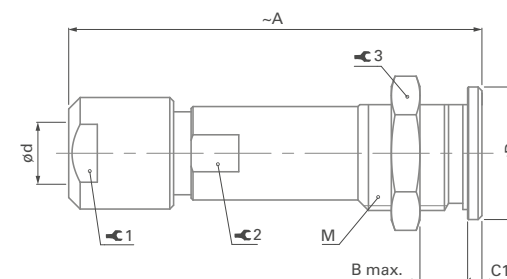

Size	A	B max.	C1	D	d max	M	1	Torque1 [Nm]	2	3	Torque 3 [Nm]
102	35	9	1.5	11	4.7	9x0.5	7	0.6	-	11	1.3
103 ¹⁾	44	10	1.5	14	6.7	12x1	10	1.0	9	14	2.5
1031	Please contact us for additional information										
104	50	11	2.0	19	8.7	15x1	12	2.0	12	17	4.0
105 ¹⁾	60	16	2.0	22	10.7	18x1	15	3.5	14	22	6.0
106	80	21	3.0	37	19.2	32x1	25	8.0	25	TX00.106	15
107	105	17	4.0	40	22.7	35x1	32	10.0	30	TX00.107	16

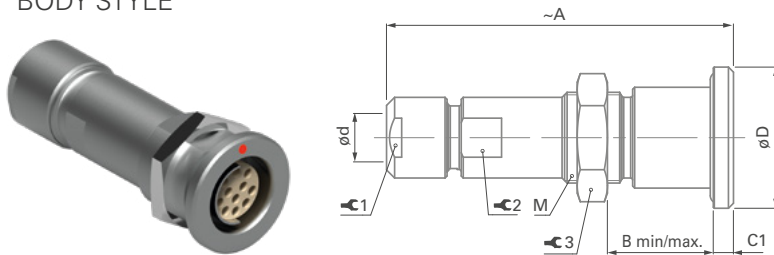RECEPTACLES**PANEL FRONT
MOUNTED CABLE****DKE - 102, 103 & 1031 SIZE****BODY STYLE**

Size	A	B min/max.	C	C1	D	d max	M	Y ₁	Torque 1 [Nm]	Y ₂	Y ₃	Torque 3 [Nm]
102	35	9/12	-	2	14	4.3	9x0.5	7	0.6	7	11	1.3
103	45	9/14	-	3	17	6.2	14x1	10	1.0	10	17	3.0
1031	Please contact us for additional information											

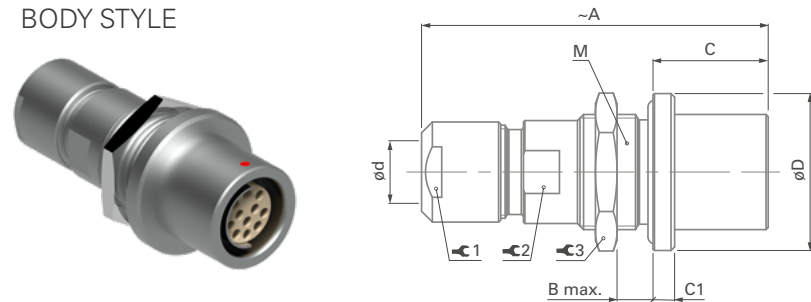DKE - 104, 105, 106 & 107 SIZE**BODY STYLE**

Size	A	B max.	C	C1	D	d max	M	Y ₁	Torque 1 [Nm]	Y ₂	Y ₃	Torque 3 [Nm]
104	50	8	16.0	3	22	8.7	16x1	12	2.0	13	19	4.5
105	61	9	19.0	4	27	10.7	20x1	15	3.5	16	25	6.5
106	85	9	25.5	7	37	19.2	30x1	25	8.0	25	TX00.106	14
107	110	21	25.0	5	45	22.7	35x1	32	10.0	30	TX00.107	16

ELECTRICAL & CONTACT CONFIGURATIONS

A/Z POLARITY

- For all body styles except WDE..... B 2-24
- For WDE body style..... B 2-24

CONTACT TYPES

- Solder contacts..... B 2-25
- PCB contacts..... B 2-25
- Crimp contacts, tooling..... B 2-25

CONTACT CONFIGURATIONS

- 102 Size..... B 2-27
- 103 Size..... B 2-28
- 1031 Size..... B 2-29
- 104 Size..... B 2-31
- 105 Size..... B 2-34
- 106 Size..... B 2-36
- 107 Size..... B 2-37

A/Z POLARITY

To protect users from contact with dangerous voltages, most of our connectors exist in two versions:

STANDARD "A" POLARITY

The contacts of the receptacle are protected against accidental touch.

Recommended when voltage is present on the receptacle.

INVERTED "Z" POLARITY

The contacts of the plug are protected against accidental touch.

Recommended when voltage is present on the plug.

	Receptacle D	Plug S
Type "A" Standard Polarity		
Type "Z" Inverted Polarity		

IMPORTANT: AN "A" TYPE CONNECTOR CAN NEVER BE MATED WITH A "Z" TYPE CONNECTOR.

A plug "S" has the same housing in type "A" as in type "Z", but type "A" comes with unprotected contacts while type "Z" is equipped with touch-

protected contacts. In most cases these are female contacts which are recessed in the insulator.

BULKHEAD FEEDTHROUGH WDE

Type "AZ" is the standard version of the WDE. The flange side accepts an "A" type plug, and the threaded side accepts a "Z" type plug.

Type "A" plug (S)	WDE, type "AZ"	Type "Z" plug (S)

The "ZA" version of the WDE accepts a type "Z" plug at the flange side and accepts a type "A" plug at the threaded end.

CONTACT TYPES

Fischer Connectors' contacts are highly reliable and are guaranteed up to 10,000 mating cycles.

All standard brass and bronze contacts for use in the Core Series Brass are screw machined, and are gold plated over a nickel underplate.

Most connectors are available with solder, crimp or PCB contacts, and each type is optimized for a particular application.

SOLDER CONTACTS

Most versatile
Pre-installed contacts
Qualified assemblers required



- Can be produced with any type of contact block material and accept a wide range of wire sizes.
- Contacts are pre-installed in the insulator block, and the wires can be terminated with any appropriately sized soldering iron.
- May require operators who are qualified in specialized soldering techniques.

PCB CONTACTS

PCB or Flex circuit mount
Reduced pin diameter
Wave soldering



- Designed to be mounted directly onto a PCB or flex circuit; can be used in wave soldering operations for faster production assembly.
- Preferred for high rates of data transmission due to the low distance to the board that their integration allows. This helps reducing signal interferences.
- PCB pins are generally used on rear mounted panel connectors.

CRIMP CONTACTS

Selectively annealed area
Special tools required
Limited range of wire sizes



- Each contact has a selectively annealed area which is deformed during assembly by specialized tooling to assure proper termination of the wire to the contact.
- Commonly used for field termination or repair, as no soldering process is required.
- Not available for sealed or hermetic connectors.

TOOLING FOR CRIMP CONTACTS

Size	Polarity	Contact diameter (mm)									
		0.5		0.7		0.9		1.3		1.6	
		Part number		Part number		Part number		Part number		Part number	
		Contact	Positioner	Contact	Positioner	Contact	Positioner	Contact	Positioner	Contact	Positioner
102	Male	200.2113	TX00.300	200.2884	TX00.304	200.2890	TX00.307	-	-	-	-
	Female	200.2114	TX00.302	200.2885	TX00.305	200.2892	TX00.309	-	-	-	-
103	Male	200.2113	TX00.300	200.2884	TX00.304	200.2890	TX00.307	200.2402	TX00.311	-	-
	Female	200.2114	TX00.302	200.2885	TX00.305	200.2892	TX00.309	200.2214	TX00.312	-	-
1031	Male	200.2172	TX00.301	200.2884	TX00.304	200.2890	TX00.307	200.2402	TX00.311	-	-
	Female	200.2183	TX00.303	200.2885	TX00.305	200.2892	TX00.309	200.2214	TX00.312	-	-
104	Male	200.2172	TX00.301	200.2884	TX00.304	200.2890	TX00.307	200.2402	TX00.311	200.1653	TX00.313
	Female	200.2183	TX00.303	200.2885	TX00.305	200.2892	TX00.309	200.2214	TX00.312	200.1654	TX00.314
105	Male	-	-	200.2884	TX00.304	200.2891	TX00.308	200.2403	TX00.338	200.1653	TX00.313
	Female	-	-	200.2886	TX00.306	200.2893	TX00.310	200.2214	TX00.312	200.1654	TX00.314
Crimp tool part number		TX00.240		TX00.240		TX00.240		TX00.240		TX00.242	

See section Tooling, section B 6-21, for description of Crimping Tool and Positioner.

Please refer to www.fischerconnectors.com/technical for detailed information and assembly instructions.

102 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts	Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
			AC r.m.s		DC										
			Solder	Crimp ⁶⁾	PCB			Solder contacts ¹⁾⁸⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body	Contact to contact		
102 $\begin{smallmatrix} A \\ Z \end{smallmatrix}$ 051		2	●	● ⁷⁾	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.3	1.7	1.8	2.4	≤ 250	9.2
102 A066 ⁹⁾		2	●		●	PEEK	0.5	max Ø0,88mm AWG21 [1] AWG22 [7/30]	–	1.2	1.8	1.8	3.4	≤ 200	6.2
102 $\begin{smallmatrix} A \\ Z \end{smallmatrix}$ 052		3	●		●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.3	1.3	1.8	1.6	≤ 250	8.2
102 $\begin{smallmatrix} A \\ Z \end{smallmatrix}$ 053		4	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.2	1.2	1.7	1.8	≤ 200	5.5
102 $\begin{smallmatrix} A \\ Z \end{smallmatrix}$ 054		5	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	0.8	1.0	1.3	1.8	≤ 160	5.2
102 $\begin{smallmatrix} A \\ Z \end{smallmatrix}$ 056		7	●	●	●	PEEK	0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	max ø0.43mm min ø0.20mm AWG28-32	0.8	1.0	1.3	1.8	≤ 160	4.0
102 $\begin{smallmatrix} A \\ Z \end{smallmatrix}$ 059		9	●		●	PEEK	0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	–	0.8	1.1	1.2	1.8	≤ 160	3.1

¹⁾ Stranding values are in brackets.²⁾ Testing may be required. For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with S plug and D receptacle. Please contact us for ratings for WSO right-angle plugs and WDE bulkhead feedthroughs.⁶⁾ Plug with crimp contacts must be used with unshielded clamps only. See page B2-43.⁷⁾ Only available for A polarity plugs.⁸⁾ Solder contact version of DBPLE/DBPLU with ground contact: Ground contact for wire size: max 0.79mm / AWG 21 [1] / AWG 22 [7/30].⁹⁾ Layout dedicated to SPE data protocol 1 Gbit/s

103 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts	Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
			AC r.m.s		DC										
			Solder	Crimp	PCB			Contact to body	Contact to contact	Contact to body	Contact to contact				
103 A Z 051		2	●	●	●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm min ø0.58mm AWG18-24	1.5	2.2	2.2	3.0	≤ 250	13
103 A Z 052		3	●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.2	1.5	1.8	2.0	≤ 250	12
103 A Z 053		4	●		●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.2	1.6	2.0	2.4	≤ 250	7.0
103 A Z 054		5	●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.1	1.4	1.9	2.2	≤ 250	6.8
103 A Z 056		6	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.0	1.3	2.0	2.0	≤ 250	5.2
103 A Z 057		7	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.0	1.3	2.0	2.0	≤ 250	5.0
103 A Z 058		8	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	0.8	1.1	1.4	1.9	≤ 200	3.8
103 A Z 062		12	●		●	PEEK	0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	–	0.9	1.2	1.5	1.8	≤ 200	2.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with S plug and D receptacle. Please contact us for rating for WSO right-angle plugs and WDE bulkhead feedthroughs.

1031 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
				Solder	Crimp	PCB			Solder contacts ¹⁾		AC r.m.s		DC			
									Contact to body	Contact to contact	Contact to body	Contact to contact				
1031 A 009 ⁷⁾		9	2	●		●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	-	1.2	1.3	1.7	2.0	≤ 250	9.0
			6	●		●		0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	-	0.9	1.1	1.3	1.6	≤ 250	1.0
			1	●		●		0.5	max ø0.63mm AWG24 [1] AWG 26 [19/38]	-	0.9	1.1	1.3	1.6	≤ 250	1.0
1031 ^A _Z 010		10		●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.4	1.5	2.0	2.2	≤ 250	4.5
1031 ^A _Z 012		12		●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.4	1.5	2.0	2.2	≤ 250	4.2
1031 ^A _Z 029 ⁶⁾		12	3	●			PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	-	1.4	1.6	2.0	2.4	≤ 160	7.0
			9					0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	-	1.4	1.5	2.0	2.1		1.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with S plug and D receptacle. Please contact us for rating for WSO right-angle plugs and WDE bulkhead feedthroughs.⁶⁾ Not available in sealed version.⁷⁾ Layout dedicated to USB 3.2 Gen2 10 Gbit/s. The 2 power contacts 0.7mm are positioned to make contact first & break last.

1031 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
				Solder	Crimp	PCB					AC r.m.s		DC			
									Solder contacts ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body	Contact to contact		
1031 A 105 ^{6) 7)}		3	●			PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.1	1.5	1.8	2.2	≤ 200	8.1	
		11					0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	–	1.1	1.0	2.3	2.0		1.0	
1031 A Z 015 ⁶⁾		2	●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.4	2.0	2.0	3.0	≤ 200	12.5	
		13					0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	–	1.4	1.4	2.0	2.0		1.0	
1031 A Z 019		19	●	●	●	PEEK	0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	max ø0.43mm min ø0.20mm AWG28-32	1.2	0.9	2.0	1.5	≤ 250	2.5	

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with S plug and D receptacle. Please contact us for rating for WSO right-angle plugs and WDE bulkhead feedthroughs.⁶⁾ Not available in sealed version.⁷⁾ The 3 power contacts 0.9 mm as well as contact 0.5 mm No. 1 are positioned to make contact first & break last.

104 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact Ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
				Solder	Crimp	PCB			Solder contacts ¹⁾	Crimp contacts	AC r.m.s		DC			
											Contact to body	Contact to contact	Contact to body	Contact to contact		
104 ^A / _Z 051		2		●		●	PEEK	1.6	max ø1.86mm AWG13 [1] AWG14 [7/22]	–	1.8	2.2	2.8	3.2	≤ 500	20
104 ^A / _Z 040		3		●	●	●	PBT	1.6	max ø1.86mm AWG13 [1] AWG14 [7/22]	max ø1.78mm min ø1.17mm AWG14-18	1.6	2.0	2.6	3.0	≤ 500	18
104 ^A / _Z 037		4		●	●	●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm min ø0.58mm AWG18-24	1.8	2.2	2.5	3.0	≤ 500	12
104 ^A / _Z 087		4	2	●		●	PBT	2.3	max ø2.48mm AWG11 [1] AWG12 [7/20]	–	1.5	1.6	2.2	2.5	≤ 400	28
			2					0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	2.0		2.8			3.0
104 ^A / _Z 053		5		●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.4	1.7	2.4	2.7	≤ 320	11
104 ^A / _Z 065		6		●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.7	2.0	2.4	2.6	≤ 400	6.5
104 ^A / _Z 054		7		●		●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.5	1.8 ⁶⁾	2.2	2.0 ⁶⁾	≤ 320	6.5
												2.1		2.8		

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with S plug and D receptacle. Please contact us for rating for WSO right-angle plugs and WDE bulkhead feedthroughs.⁶⁾ Test voltages between the contacts with the shortest distance.

104 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact ø <i>(mm)</i>	Wire size ²⁾		Test voltage ⁵⁾ <i>[kV] in mated position</i>				Rated voltage ⁴⁾ r.m.s <i>[V]</i>	Current ³⁾ <i>[A]</i>
				Solder	Crimp	PCB					AC r.m.s		DC			
									Solder contacts ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body	Contact to contact		
104 ^A _Z 066		8		●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.5	1.5	2.5	2.5	≤ 320	6.2
104 ^A _Z 055		9	1	●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	2.4	2.2	3.8	3.6	≤ 250	12
			8					0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.4	1.5	2.0	2.4		6.0
104 ^A _Z 056		11		●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.4	1.5	2.1	2.2	≤ 250	5.8
104 ^A _Z 104 ⁶⁾		12	3	●			PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	2.2	2.0	3.3	3.0	≤ 200	12.0
			9					0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.4	1.7	2.1	2.4		1.0
104 A 131 ⁷⁾		12		●		●	PEEK	0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	–	2.5	1.9	4.4	2.7	≤ 250	4.2

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with S plug and D receptacle. Please contact us for rating for WSO right-angle plugs and WDE bulkhead feedthroughs.⁶⁾ Not available in sealed version.⁷⁾ Contact No. 1 is positioned to make contact first & break last. Only available in sealed version.

104 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
				Solder	Crimp	PCB					AC r.m.s		DC			
									Solder contacts ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body	Contact to contact		
104 A 130 ⁸⁾		3	●		●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.7	1.4	3.0	1.8	≤ 250	9.5	
		11					0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	–	1.7	1.2	3.0	1.7		1.0	
104 ^A _Z 086		16	●		●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.0	1.5	1.6	2.2	≤ 200	4.0	
104 ^A _Z 092		19	●		●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	0.8	1.2	1.2	1.8	≤ 200	3.5	
104 A 135 ^{7) 9)}		20	●		●	PEEK	0.5	12x max ø0.55mm AWG26 [1] AWG26 [19/38] + 8x max ø0.43mm AWG28 [1] AWG28 [19/40]	–	1.2	1.2	1.8	1.8	≤ 250	2.1 ⁹⁾	
104 A 124 ⁶⁾		27	●		●	PEEK	0.5	–	max ø0.43mm min ø0.20mm AWG28-32	1.2	0.5	1.8	0.5	≤ 200	2.0	

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with S plug and D receptacle. Please contact us for rating for WSO right-angle plugs and WDE bulkhead feedthroughs.⁶⁾ Solder and PCB contact types available only for DBPU and DBPLU receptacles. Crimp contact type available only for plugs.⁷⁾ Layout dedicated to UHD-Video 18 Gbit/s. Only available in sealed version.⁸⁾ The 3 power contacts 0.9 mm as well as contact 0.5 mm No. 1 are positioned to make contact first & break last. Only available in sealed version.⁹⁾ Current of 1.8 A at maximum temperature rise of 30 °C according to UHD specifications.

All dimensions and images shown are in millimeters and are for reference only.

105 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact types		Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁶⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]	
										AC r.m.s		DC				
				Solder	Crimp			PCB	Solder contact ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body			Contact to contact
105 A Z 051		2		●			PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	2.5	3.0	4.0	4.0	≤ 630	26
105 A Z 087		2		●			PEEK	3.0	max ø3.13mm AWG9 [1] AWG10 [105/30]	–	1.2	1.6	2.3	3.0	≤ 400	30
105 A Z 052		3		●			PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	2.0	2.5	3.0	3.5	≤ 400	23
105 A Z 053		4		●			PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	1.8	1.8	2.6	2.6	≤ 320	20
105 A Z 054 ⁵⁾		7	1	●			PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	3.0	2.0	4.0	3.0	≤ 320	25
			6					1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.8	1.5	2.5	2.0		7.0
105 A Z 067		8		●			PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.7	2.0	2.5	2.8	≤ 320	10
105 A 124		8	2	●			PEEK	2.3	max ø2.48mm AWG11 [1] AWG12 [7/20]	–	1.2	2.2	1.8	3.2	≤ 250	18.5
			6					1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.2	1.2	1.8	1.8		7.5
105 A Z 101 ⁵⁾		9	1	●	●		PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	3.0	2.0	4.0	3.0	≤ 320	25
			8					1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.8	1.5	2.5	2.0		5.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Contact dia. 2.0 is positioned to make contact first and break last.⁶⁾ Measured with S plug and D receptacle. Please contact us for rating for WSO right-angle plugs and WDE bulkhead feedthroughs.

105 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact $\varnothing$ [mm]	Wire size ²⁾		Test voltage ⁸⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
											AC r.m.s		DC			
				Solder	Crimp	PCB			Solder contacts ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body	Contact to contact		
105 ^A _Z 062		10		●	●	●	PEEK	1.3	max $\varnothing$ 1.18mm AWG17 [1] AWG18 [16/30]	max $\varnothing$ 1.18mm min $\varnothing$ 0.58mm AWG18-24	1.7	2.0	2.5	2.7	≤ 320	9.0
105 ^A _Z 069		12		●		●	PEEK	1.3	max $\varnothing$ 1.18mm AWG17 [1] AWG18 [16/30]	-	1.4	1.5	1.8	2.0	≤ 250	8.0
105 ^A _Z 104 ⁵⁾		13	3	●		●	PEEK	1.3	max $\varnothing$ 1.18mm AWG17 [1] AWG18 [16/30]	-	2.5	1.5	3.8	2.2	≤ 320	14
			10					0.7	max $\varnothing$ 0.79mm AWG21 [1] AWG22 [7/30]	-	1.3	1.5	1.8	2.2		1.0
105 A 127 ⁷⁾		13	3		●		PEEK	1.3	-	max $\varnothing$ 1.18mm min $\varnothing$ 0.58mm AWG18-24	3.0	2.8	4.8	3.9	≤ 320	14
			10					0.7	-	max $\varnothing$ 0.62mm min $\varnothing$ 0.38mm AWG24-28	3.1	1.1	4.7	1.9		1.0
105 ^A _Z 058		15		●	●	●	PEEK	0.9	max $\varnothing$ 0.79mm AWG21 [1] AWG22 [7/30]	max $\varnothing$ 0.83mm min $\varnothing$ 0.48mm AWG22-26	1.4	1.6	1.8	2.2	≤ 250	5.3
105 ^A _Z 110 ⁶⁾		16	4	●		●	PEEK	1.6	max $\varnothing$ 1.86mm AWG13 [1] AWG14 [7/22]	-	1.6	1.3	2.8	2.1	≤ 250	14
			12					0.7	max $\varnothing$ 0.79mm AWG21 [1] AWG22 [7/30]	-	1.0	1.2	1.5	2.0		1.0
105 ^A _Z 038		18		●	●	●	PEEK	0.9	max $\varnothing$ 0.79mm AWG21 [1] AWG22 [7/30]	max $\varnothing$ 0.83mm min $\varnothing$ 0.48mm AWG22-26	1.4	1.6	1.8	2.2	≤ 200	4.5
105 ^A _Z 093		24		●		●	PBT	0.7	max $\varnothing$ 0.79mm AWG21 [1] AWG22 [7/30]	-	1.2	1.5	1.5	2.0	≤ 250	3.5
105 ^A _Z 102		27		●	●	●	PEEK	0.7	max $\varnothing$ 0.79mm AWG21 [1] AWG22 [7/30]	max $\varnothing$ 0.62mm min $\varnothing$ 0.38mm AWG24-28	1.2	1.5	1.5	2.0	≤ 250	3.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Contacts dia. 1.3 are positioned to make contact first and break last.⁶⁾ Contacts dia. 1.6 are positioned to make contact first and break last.⁷⁾ Inverted polarity: female contacts on plug/male contact on receptacle.⁸⁾ Measured with S plug and D receptacle. Please contact us for rating for WSO right-angle plugs and WDE bulkhead feedthroughs.

All dimensions and images shown are in millimeters and are for reference only.

106 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts	Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁷⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
										AC r.m.s		DC			
			Solder	Crimp	PCB			Male solder contacts ¹⁾	Female solder contacts ¹⁾	Contact to body	Contact to contact	Contact to body	Contact to contact		
106 ^A _Z 003 ⁵⁾		3	● ○			PTFE PEEK	2.3	max ø2.13mm AWG12 [1] AWG14 [7/22]	max ø2.28mm AWG12 [1] AWG14 [105/34]	3.5	5.0	6.0	6.5	≤ 1000	26
106 ^A _Z 007 ⁵⁾⁶⁾		7	● ○			PTFE PEEK	2.0	max ø2.08mm AWG12 [1] AWG14 [7/22]	max ø2.03mm AWG13 [1] AWG14 [7/22]	2.5	3.0	4.5	4.5	≤ 800	20
106 ^A _Z 019		8	● ○			PTFE PEEK	2.0	max ø2.08mm AWG12 [1] AWG14 [7/22]	max ø2.03mm AWG13 [1] AWG14 [7/22]	2.2	2.2	4.0	3.0	≤ 630	19
106 ^A _Z 015		12	● ○			PTFE PEEK	2.0	max ø2.08mm AWG12 [1] AWG14 [7/22]	max ø2.03mm AWG13 [1] AWG14 [7/22]	1.8	2.2	2.5	3.0	≤ 500	16
106 ^A _Z 018		17	● ○			PTFE PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.23mm AWG17 [1] AWG18 [16/30]	1.8	2.2	2.5	3.0	≤ 500	8.0
106 ^A _Z 017		24	● ○			PTFE PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm AWG17 [1] AWG18 [16/30]	1.8	1.5	2.5	2.1	≤ 400	7.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ The contact solder cups are specially insulated.⁶⁾ Contact Number 1 is positioned to make contact first and break last.⁷⁾ Measured with S plug and D receptacle. Please contact us for rating for WDE bulkhead feedthroughs.

107 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
				Solder	Crimp	PCB					AC r.m.s		DC			
									Male solder contacts ¹⁾	Female solder contacts ¹⁾	Contact to body	Contact to contact	Contact to body	Contact to contact		
107 A Z 013		4				PTFE PEEK	2.3	max ø2.93mm AWG9 [1] AWG10 [37/26]	max ø2.28mm AWG12 [1] AWG14 [105/34]	3.6	4.3	5.0	5.6	≤ 1000	26	
107 A Z 018		6				PTFE PEEK	2.3	max ø2.93mm AWG9 [1] AWG10 [37/26]	max ø2.28mm AWG12 [1] AWG14 [105/34]	3.4	3.4	4.3	4.3	≤ 800	25	
107 A Z 015		19				PTFE PEEK	2.0	max ø2.08mm AWG12 [1] AWG14 [7/22]	max ø2.03mm AWG13 [1] AWG14 [7/22]	2.0	2.5	2.5	3.2	≤ 500	13	
107 A Z 051		27				PTFE PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm AWG17 [1] AWG18 [16/30]	2.0	2.0	3.0	3.2	≤ 400	7.5	
107 A Z 052		40				PTFE PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm AWG17 [1] AWG18 [16/30]	1.8	1.5	2.5	2.0	≤ 320	6.5	
107 A Z 023		8	●			PTFE	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm AWG17 [1] AWG18 [16/30]	2.0	1.8	2.8	2.5	≤ 400	7.0	
		47					0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.88mm AWG20 [1] AWG22 [19/34]	1.7	1.5	2.5	2.1		3.0	

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with S plug and D receptacle. Please contact us for rating for WDE bulkhead feedthroughs.

OPTIONS

- Housing colors B 2-39
- Cable bend reliefs and clamp nut types B 2-39

OPTIONS **PART NUMBERING**

- Cable bend relief part numbering B 2-41

HOUSING COLORS & CABLE BEND RELIEFS

CONNECTOR HOUSING COLORS

All the body styles of our Core Series Brass Product Line are available in two colors:



- Natural chrome connector housing with red guide mark.




- Non reflective anthracite housing with white guide mark.

Guide mark is standard for Multipole Low and High Voltage, Mixed Multipole and Mixed Coax connectors.

CABLE BEND RELIEFS & CLAMP NUT TYPES

A cable bend relief is a useful accessory for connectors mounted with cable clamp sets (S/SC; SOV; SA; SV; WSO; K/KE; DK; DKE; DBKE).

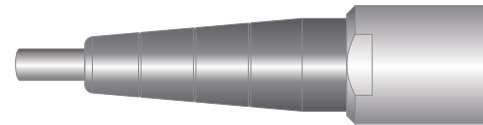


It helps to:

- Reduce bending stress on the cable and inner wires, enhancing durability
- Color-code your connectors for easy identification.



Cable bend reliefs require special clamp nuts, thus are linked with your selection of options.

Color-coding is achieved by using accessories:



- Cable bend reliefs for cable connectors.



- Washers for panel receptacles.

HOUSING COLORS & CABLE BEND RELIEFS

1	Housing color Which housing color do you need?		NATURAL CHROME with red guide mark					ANTHRACITE with white guide mark				
2	Contact block material Which contact block material do you need?		PTFE	PBT		PEEK		PTFE	PBT		PEEK	
3	Contact type Which contact type do you need?		Solder	Solder	Crimp ¹⁾	Solder	Crimp ¹⁾	Solder	Solder	Crimp ¹⁾	Solder	Crimp ¹⁾
4	Keying code Which keying code do you need?	Code 1 	-60	-80	-100	-130	-150	-AN70	-AN90	-AN110	-AN140	-AN160
		Code 2 	-2060	-2080	-2100	-230	-250	-AN2070	-AN2090	-AN2110	-AN240	-AN260
		Code 3 	-3060	-3080	-3100	-330	-350	-AN3070	-AN3090	-AN3110	-AN340	-AN360

¹⁾ Crimp contacts are not an option for sealed or hermetic connectors.

CONTACT TYPE FOR PANEL MOUNTED CONNECTORS

Applicable for	Last digit	Description
Front mounted: D - DEU/E - DB - DBEU/E - DG - SF - SFU/E	0	Standard: solder contacts
	9	With PCB (Printed Circuit Board) contacts instead of solder contacts
Rear mounted: DBP - DBPU/E - DBPLU/E - DGP - SFPU/E	0	Standard: PCB (Printed Circuit Board) contacts
	9	With solder contacts instead of PCB (Printed Circuit Board) contacts

Options are available on request, please contact us.

DESIGN AND ACCESSORIES

Applicable for	Extensions	Description
Receptacles	N	Nickel plated body with bright finish
	E	EPDM interface O-ring
	G	Ground tag if solder contact or ground pin if PCB contact
	B	Decorative black slotted nut
	D	Decorative slotted nut
	F	Decorative nut (with 2 flats)
	C	Decorative anthracite slotted nut

CABLE BEND RELIEFS PART NUMBERING

CABLE BEND RELIEF

Do you need a cable bend relief, and if yes which color ?

Applicable for	Last digit	Description
Cable mounted plugs & receptacles using cable clamp sets except SS/SSC-KS/KSE	0	Clamp nut without bend relief
	1	Clamp nut with white bend relief 
	2	Clamp nut with black bend relief 
	3	Clamp nut with green bend relief 
	4	Clamp nut with blue bend relief 
	5	Clamp nut with yellow bend relief 
	6	Clamp nut with red bend relief 
	7	Clamp nut with grey bend relief 

EXAMPLES

PLUGS

S 102 A056-130+

Natural chrome housing color with PEEK contact block, solder contacts, keying code 1, clamp nut without bend relief and without cable clamp set (To be ordered separately)

S 102 A056-232+

Natural chrome housing color with PEEK contact block, solder contacts, keying code 2, clamp nut with black bend relief, without cable clamp set

SS 102 A056-AN260

Anthracite housing color with PEEK contact block, crimp contacts, keying code 2

RECEPTACLES

D 102 A056-130

Natural chrome housing color with PEEK contact block, solder contacts, keying code 1

D 102 A056-AN260

Anthracite housing color with PEEK contact block, crimp contacts, keying code 2

DBPU 102 A056-130G

Natural chrome housing color with PEEK contact block, PCB contacts, keying code 1 and ground pin

DBPU 102 A056-130NBE

Nickel plated body with PEEK contact block, PCB contacts, keying code 1, with anthracite nut and EPDM interface O-ring

INTRODUCTION

- Range overview: S, U & E types..... B 2-43
- Part numbering..... B 2-43

DIMENSIONS


S/SC; SOV; SA; SV; K/KE; DK; DKE & DKBE; BODY STYLES

- 102 Size..... B 2-44
- 103 Size..... B 2-45
- 1031 Size B 2-46
- 104 Size..... B 2-47
- 105 Size..... B 2-48
- 106 Size..... B 2-49
- 107 Size..... B 2-50

WSO BODY STYLE

- 102, 103, 1031, 104 & 105 Size B 2-51

INTRODUCTION

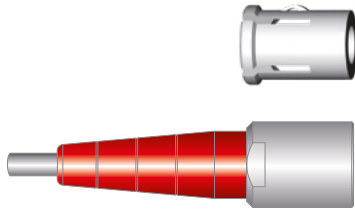

To guarantee excellent cable retention and strain relief, Fischer Connectors provides robust and high quality cable clamp sets:

- Collet style clamp system retaining cable over large jacket surface area.
- Protection of small diameters and delicate conductors.
- Can be combined with cable bend reliefs for optimal performance.

Cable clamp sets are suitable for all cable mounted connectors, except SS/SSC and KS/KSE.

RANGE OVERVIEW: S, U & E CABLE CLAMP SETS

Fischer Connectors offers three types of cable clamps sets.
The table below will help you select the one corresponding to your needs.

Cable clamp set	Do you need the interface between the cable and the connector to be sealed?	
	Unsealed	Sealed
S - Shielded	●	
U - Unshielded	●	
E - Environmental		●

For 106 and 107 connector sizes, only S and E cable clamp sets are available.

PART NUMBERING

Below cable clamp sets should be ordered separately	
Multipole low voltage	Triax
S 102 A056-130+	
Examples connector ordering line	
S 102 A056-130+	
Clamp set ordering line	
E3 102.5/2.0	

See following pages for cable clamp sets set selection.

Do you need the connector to be terminated to the cable shield?	
Unshielded	Shielded
	●
●	
●	●

Below cable clamp sets are included with connector	
Coax low voltage	Coax high voltage
Shielded (S) or Environmental (E) cable clamp set diameter should be added to the connector part number separated by ø.	
Examples for S - Shielded clamp sets	
K 103 A002-600 Ø6.2	
For E - Environmental clamp sets	
KE 103 A002-600 Ø6.2	

See following pages for S or E cable clamp sets set selection.

102 SIZE**S**
SHIELDED

Shielded cable clamp with sleeve and clamp.



Cable dia. range	Collet Ø	Cable clamp set ¹⁾
1.5 - 2.1	2.1	E32 102.1/2.1 + A
2.1 - 2.6	2.6	E32 102.1/2.6 + A
2.6 - 3.1	3.1	E32 102.1/3.1 + A
3.1 - 3.6	3.6	E32 102.1/3.6 + A
3.6 - 4.1	4.1	E32 102.1/4.1 + A
4.1 - 4.3	4.3	E32 102.1/4.3 + A
4.3 - 4.7	4.7	E3 102.248 + A

U
UNSHIELDED


Unshielded, one-piece cable clamp.



Cable dia. range	Collet Ø	Cable clamp set ¹⁾
1.4 - 2.0	2.0	E3 102.5/2.0
2.0 - 2.7	2.7	E3 102.5/2.7
2.7 - 3.5	3.5	E3 102.5/3.5
3.5 - 4.2	4.2	E3 102.5/4.2
4.2 - 4.7	4.7	E3 102.5/4.7

E
ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.

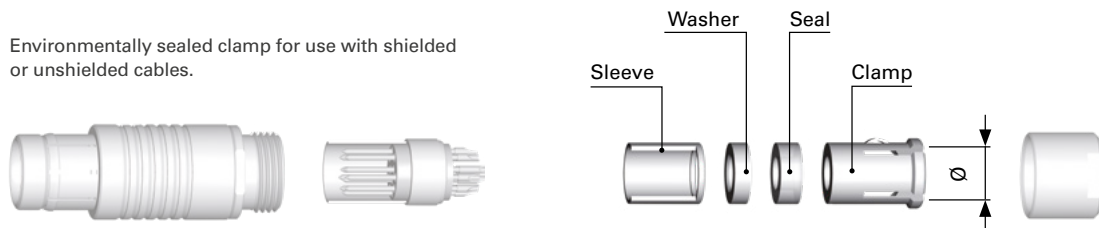


Cable dia. range	Collet Ø	Cable clamp set ¹⁾
1.5 - 2.1	2.1	E31 102.2/2.1 + B
2.1 - 2.6	2.6	E31 102.2/2.6 + B
2.6 - 3.1	3.1	E31 102.2/3.1 + B
3.1 - 3.6	3.6	E31 102.2/3.6 + B
3.6 - 4.1	4.1	E31 102.2/4.1 + B
4.1 - 4.3	4.3	E31 102.2/4.3 + B

¹⁾ For ordering information see page B2-43.

103 SIZE**S**
SHIELDED

Shielded cable clamp with with sleeve, washer and clamp.

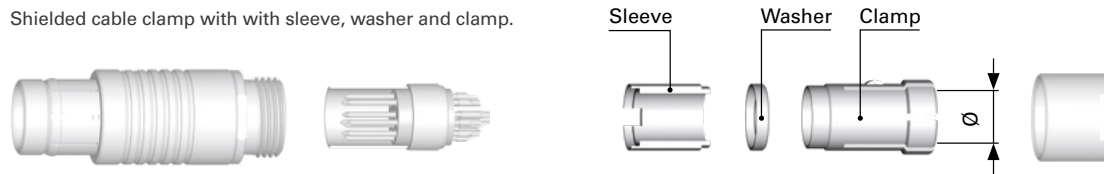

Cable dia. range	Collet Ø	Cable clamp set ¹⁾ PEEK or PBT insulator
1.7 - 2.2	2.2	E31 103.1/2.2 + B
2.2 - 2.7	2.7	E31 103.1/2.7 + B
2.7 - 3.2	3.2	E31 103.1/3.2 + B
3.2 - 3.7	3.7	E31 103.1/3.7 + B
3.7 - 4.2	4.2	E31 103.1/4.2 + B
4.2 - 4.7	4.7	E31 103.1/4.7 + B
4.7 - 5.2	5.2	E31 103.1/5.2 + B
5.2 - 5.7	5.7	E31 103.1/5.7 + B
5.7 - 6.2	6.2	E31 103.1/6.2 + B
6.2 - 6.7	6.7	E31 103.1/6.7 + B

U
UNSHIELDED


Unshielded, one-piece cable clamp.



Cable dia. range	Collet Ø	Cable clamp set ¹⁾ PEEK or PBT insulator
2.2 - 3.2	3.2	E3 103.6/3.2
3.2 - 4.2	4.2	E3 103.6/4.2
4.2 - 4.7	4.7	E3 103.6/4.7
4.7 - 5.2	5.2	E3 103.6/5.2
5.2 - 5.7	5.7	E3 103.6/5.7
5.7 - 6.2	6.2	E3 103.6/6.2
6.2 - 6.7	6.7	E3 103.6/6.7

E
ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.

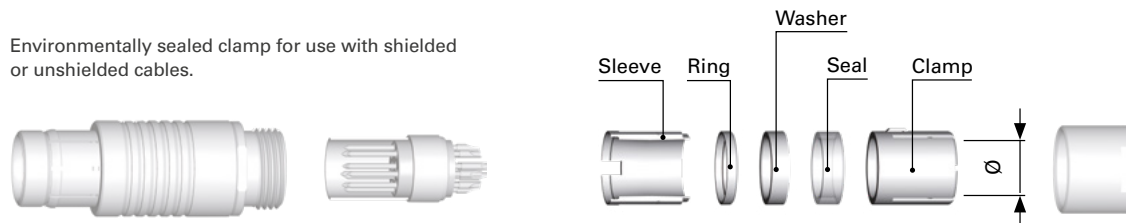


Cable dia. range	Collet Ø	Cable clamp set ¹⁾ PEEK or PBT insulator
1.7 - 2.2	2.2	E31 103.2/2.2 + B
2.2 - 2.7	2.7	E31 103.2/2.7 + B
2.7 - 3.2	3.2	E31 103.2/3.2 + B
3.2 - 3.7	3.7	E31 103.2/3.7 + B
3.7 - 4.2	4.2	E31 103.2/4.2 + B
4.2 - 4.7	4.7	E31 103.2/4.7 + B
4.7 - 5.2	5.2	E31 103.2/5.2 + B
5.2 - 5.7	5.7	E31 103.2/5.7 + B
5.7 - 6.2	6.2	E31 103.2/6.2 + B

¹⁾ For ordering information see page B2-43.

1031 SIZE**S**
SHIELDED

Shielded cable clamp with with sleeve, washer and clamp.

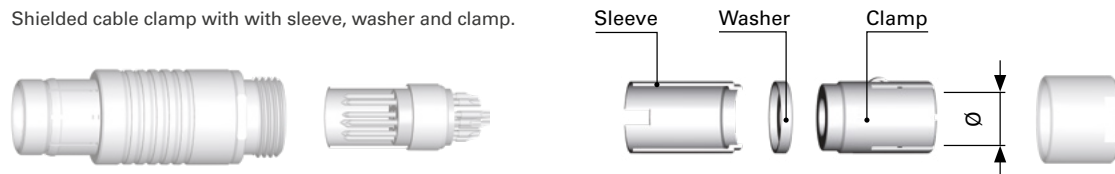

Cable Ø range	Collet Ø	Cable clamp set ¹⁾
2.2 - 2.7	2.7	E3 1031.1/2.7
2.7 - 3.2	3.2	E3 1031.1/3.2
3.2 - 3.7	3.7	E3 1031.1/3.7
3.7 - 4.2	4.2	E3 1031.1/4.2
4.2 - 4.7	4.7	E3 1031.1/4.7
4.7 - 5.2	5.2	E3 1031.1/5.2
5.2 - 5.7	5.7	E3 1031.1/5.7
5.7 - 6.2	6.2	E3 1031.1/6.2
6.2 - 6.7	6.7	E3 1031.1/6.7
6.7 - 7.2	7.2	E3 1031.1/7.2

U
UNSHIELDED


Unshielded, one-piece cable clamp.



Cable Ø range	Collet Ø	Cable clamp set ¹⁾
2.2 - 2.7	2.7	E3 1031.6/2.7
2.7 - 3.2	3.2	E3 1031.6/3.2
3.2 - 3.7	3.7	E3 1031.6/3.7
3.7 - 4.2	4.2	E3 1031.6/4.2
4.2 - 4.7	4.7	E3 1031.6/4.7
4.7 - 5.2	5.2	E3 1031.6/5.2
5.2 - 5.7	5.7	E3 1031.6/5.7
5.7 - 6.2	6.2	E3 1031.6/6.2
6.2 - 6.7	6.7	E3 1031.6/6.7
6.7 - 7.2	7.2	E3 1031.6/7.2

E
ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.

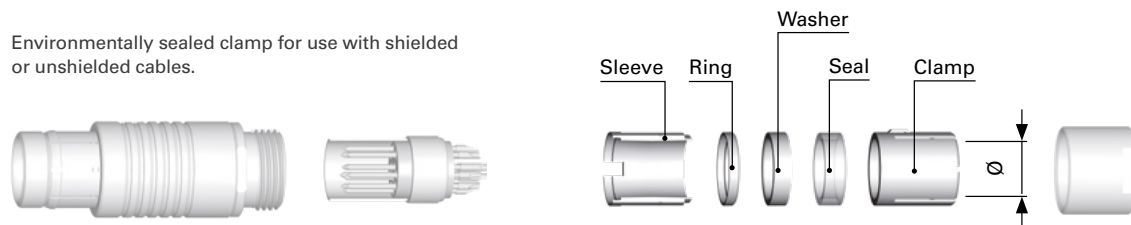


Cable Ø range	Collet Ø	Cable clamp set ¹⁾
2.2 - 2.7	2.7	E3 1031.2/2.7
2.7 - 3.2	3.2	E3 1031.2/3.2
3.2 - 3.7	3.7	E3 1031.2/3.7
3.7 - 4.2	4.2	E3 1031.2/4.2
4.2 - 4.7	4.7	E3 1031.2/4.7
4.7 - 5.2	5.2	E3 1031.2/5.2
5.2 - 5.7	5.7	E3 1031.2/5.7
5.7 - 6.2	6.2	E3 1031.2/6.2
6.2 - 6.7	6.7	E3 1031.2/6.7

¹⁾ For ordering information see page B2-43.

104 SIZE**S**
SHIELDED

Shielded cable clamp with with sleeve, spacer and clamp.

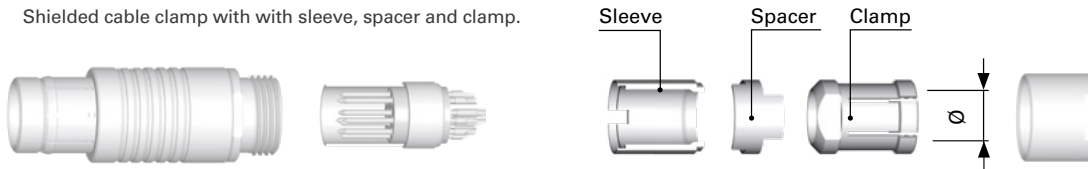

Cable $\varnothing$ range	Collet $\varnothing$	Cable clamp set ¹⁾ PEEK or PBT insulator	
		Plug	Receptacle
2.9 - 4.0	4.0	E3 104.3/4.0 + B	E3 104.4/4.0 + C
4.0 - 4.7	4.7	E3 104.3/4.7 + B	E3 104.4/4.7 + C
4.7 - 5.7	5.7	E3 104.3/5.7 + B	E3 104.4/5.7 + C
5.7 - 6.7	6.7	E3 104.3/6.7 + B	E3 104.4/6.7 + C
6.7 - 7.7	7.7	E3 104.3/7.7 + B	E3 104.4/7.7 + C
7.7 - 8.7	8.7	E3 104.3/8.7 + B	E3 104.4/8.7 + C
8.7 - 9.1	9.1	E3 104.3/9.1 + B	E3 104.4/9.1 + C

U
UNSHIELDED


Unshielded, one-piece cable clamp.



Cable $\varnothing$ range	Collet $\varnothing$	Cable clamp set ¹⁾ PEEK or PBT insulator
4.2 - 4.7	4.7	E3 104.6/4.7
4.7 - 5.7	5.7	E3 104.6/5.7
5.7 - 6.7	6.7	E3 104.6/6.7
6.7 - 7.7	7.7	E3 104.6/7.7
7.7 - 8.2	8.2	E3 104.6/8.2
8.2 - 8.7	8.7	E3 104.6/8.7

E
ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.

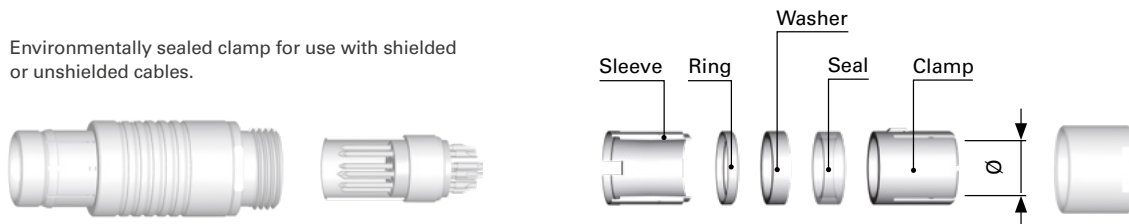


Cable $\varnothing$ range	Collet $\varnothing$	Cable clamp set ¹⁾ PEEK or PBT insulator	
		Plug	Receptacle
2.9 - 4.0	4.0	E3 104.2/4.0 + B	E3 104.2/4.0 + C
4.0 - 4.7	4.7	E3 104.2/4.7 + B	E3 104.2/4.7 + C
4.7 - 5.7	5.7	E3 104.2/5.7 + B	E3 104.2/5.7 + C
5.7 - 6.7	6.7	E3 104.2/6.7 + B	E3 104.2/6.7 + C
6.7 - 7.7	7.7	E3 104.2/7.7 + B	E3 104.2/7.7 + C
7.7 - 8.7	8.7	E3 104.2/8.7 + B	E3 104.2/8.7 + C

¹⁾ For ordering information see page B2-43.

105 SIZE**S**
SHIELDED


Shielded cable clamp with sleeve, spacer and clamp.

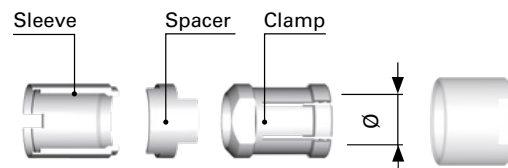

Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PEEK or PBT insulator
3.2 - 4.2	4.2	E3 105.1/4.2 + B
4.2 - 5.2	5.2	E3 105.1/5.2 + B
5.2 - 6.2	6.2	E3 105.1/6.2 + B
6.2 - 7.2	7.2	E3 105.1/7.2 + B
7.2 - 8.2	8.2	E3 105.1/8.2 + B
8.2 - 9.2	9.2	E3 105.1/9.2 + B
9.2 - 10.0	10.0	E3 105.1/10.0 + B
10.0 - 10.7	10.7	E3 105.1/10.7 + B

U
UNSHIELDED


Unshielded, one-piece cable clamp.

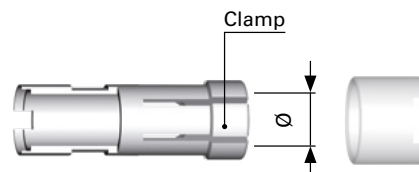

Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PEEK or PBT insulator
2.5 - 3.5	3.5	E3 105.6/3.5
3.5 - 4.5	4.5	E3 105.6/4.5
4.5 - 5.5	5.5	E3 105.6/5.5
5.5 - 6.5	6.5	E3 105.6/6.5
6.5 - 7.5	7.5	E3 105.6/7.5
7.5 - 8.5	8.5	E3 105.6/8.5
8.5 - 9.5	9.5	E3 105.6/9.5
9.5 - 10.5	10.5	E3 105.6/10.5

E
ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.

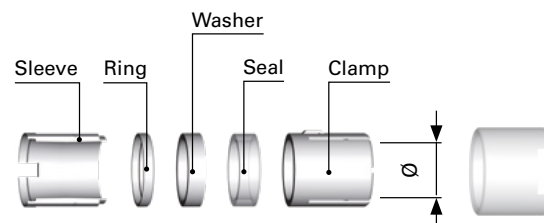


Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PEEK or PBT insulator
3.2 - 4.2	4.2	E31 105.2/4.2 + B
4.2 - 5.2	5.2	E31 105.2/5.2 + B
5.2 - 6.2	6.2	E31 105.2/6.2 + B
6.2 - 7.2	7.2	E31 105.2/7.2 + B
7.2 - 8.2	8.2	E31 105.2/8.2 + B
8.2 - 9.2	9.2	E31 105.2/9.2 + B
9.2 - 10.0	10.0	E31 105.2/10.0 + B
10.0 - 10.7	10.7	E31 105.2/10.7 + B

¹⁾ For ordering information see page B 2-43.

106 SIZE**S**
SHIELDED

Shielded cable clamp with sleeve, spacer and clamp.

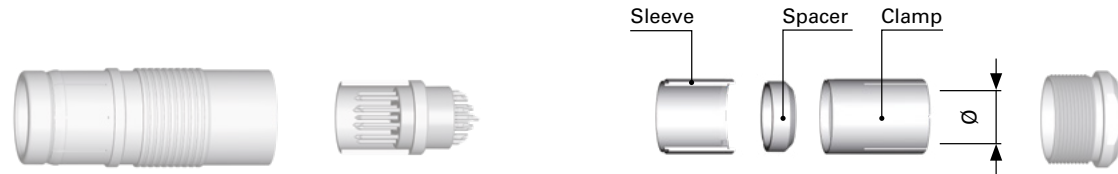

Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PTFE insulator	
		Standard	DKBE long housings
4.2 - 5.2	5.2	E3 106.1/5.2	E3 106.3/5.2
5.2 - 6.2	6.2	E3 106.1/6.2	E3 106.3/6.2
6.2 - 7.2	7.2	E3 106.1/7.2	E3 106.3/7.2
7.2 - 8.2	8.2	E3 106.1/8.2	E3 106.3/8.2
8.2 - 9.2	9.2	E3 106.1/9.2	E3 106.3/9.2


Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PTFE insulator	
		Standard	DKBE long housings
9.2 - 10.2	10.2	E3 106.1/10.2	E3 106.3/10.2
10.2 - 11.2	11.2	E3 106.1/11.2	E3 106.3/11.2
11.2 - 12.2	12.2	E3 106.1/12.2	E3 106.3/12.2
12.2 - 13.2	13.2	E3 106.1/13.2	E3 106.3/13.2
13.2 - 14.2	14.2	E3 106.1/14.2	E3 106.3/14.2

Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PTFE insulator	
		Standard	DKBE long housings
14.2 - 15.2	15.2	E3 106.1/15.2	E3 106.3/15.2
15.2 - 16.2	16.2	E3 106.1/16.2	E3 106.3/16.2
16.2 - 17.2	17.2	E3 106.1/17.2	E3 106.3/17.2
17.2 - 18.2	18.2	E3 106.1/18.2	E3 106.3/18.2
18.2 - 19.2	19.2	E3 106.1/19.2	E3 106.3/19.2

Shielded cable clamps with washers and sleeves.

E
ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.

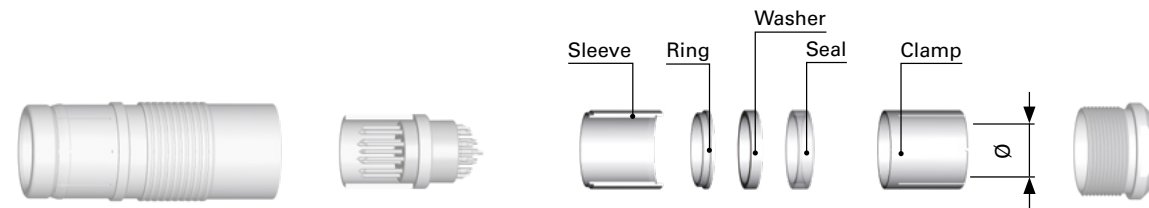

Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PTFE insulator	
		Standard	DKBE long housings
4.2 - 5.2	5.2	E3 106.2/5.2	E3 106.4/5.2
5.2 - 6.2	6.2	E3 106.2/6.2	E3 106.4/6.2
6.2 - 7.2	7.2	E3 106.2/7.2	E3 106.4/7.2
7.2 - 8.2	8.2	E3 106.2/8.2	E3 106.4/8.2
8.2 - 9.2	9.2	E3 106.2/9.2	E3 106.4/9.2


Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PTFE insulator	
		Standard	DKBE long housings
9.2 - 10.2	10.2	E3 106.2/10.2	E3 106.4/10.2
10.2 - 11.2	11.2	E3 106.2/11.2	E3 106.4/11.2
11.2 - 12.2	12.2	E3 106.2/12.2	E3 106.4/12.2
12.2 - 13.2	13.2	E3 106.2/13.2	E3 106.4/13.2
13.2 - 14.2	14.2	E3 106.2/14.2	E3 106.4/14.2

Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PTFE insulator	
		Standard	DKBE long housings
14.2 - 15.2	15.2	E3 106.2/15.2	E3 106.4/15.2
15.2 - 16.2	16.2	E3 106.2/16.2	E3 106.4/16.2
16.2 - 17.2	17.2	E3 106.2/17.2	E3 106.4/17.2
17.2 - 18.2	18.2	E3 106.2/18.2	E3 106.4/18.2

¹⁾ For ordering information see page B2-43.

107 SIZE**S**
SHIELDED

Shielded cable clamp with sleeve, spacer and clamp.

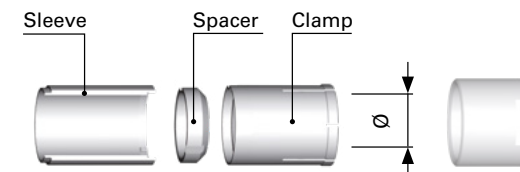


Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PTFE insulator
5.7 - 7.2	7.2	E3 107.1/7.2
7.2 - 8.2	8.2	E3 107.1/8.2
8.2 - 9.2	9.2	E3 107.1/9.2
9.2 - 10.2	10.2	E3 107.1/10.2
10.2 - 11.2	11.2	E3 107.1/11.2

Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PTFE insulator
11.2 - 12.2	12.2	E3 107.1/12.2
12.2 - 13.2	13.2	E3 107.1/13.2
13.2 - 14.2	14.2	E3 107.1/14.2
14.2 - 15.2	15.2	E3 107.1/15.2
15.2 - 16.2	16.2	E3 107.1/16.2

Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PTFE insulator
16.2 - 17.2	17.2	E3 107.1/17.2
17.2 - 18.2	18.2	E3 107.1/18.2
18.2 - 19.2	19.2	E3 107.1/19.2
19.2 - 20.2	20.2	E3 107.1/20.2
20.2 - 21.2	21.2	E3 107.1/21.2
21.2 - 22.7	22.7	E3 107.1/22.7

E
ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.


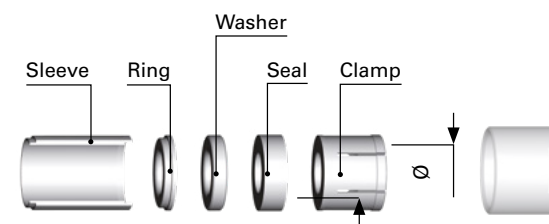


Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PTFE insulator
5.7 - 7.2	7.2	E3 107.2/7.2
7.2 - 8.2	8.2	E3 107.2/8.2
8.2 - 9.2	9.2	E3 107.2/9.2
9.2 - 10.2	10.2	E3 107.2/10.2
10.2 - 11.2	11.2	E3 107.2/11.2

Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PTFE insulator
11.2 - 12.2	12.2	E3 107.2/12.2
12.2 - 13.2	13.2	E3 107.2/13.2
13.2 - 14.2	14.2	E3 107.2/14.2
14.2 - 15.2	15.2	E3 107.2/15.2
15.2 - 16.2	16.2	E3 107.2/16.2

Cable Ø range	Collet Ø	Cable clamp set ¹⁾ PTFE insulator
16.2 - 17.2	17.2	E3 107.2/17.2
17.2 - 18.2	18.2	E3 107.2/18.2
18.2 - 19.2	19.2	E3 107.2/19.2
19.2 - 20.2	20.2	E3 107.2/20.2
20.2 - 21.2	21.2	E3 107.2/21.2
21.2 - 22.7	22.7	E3 107.2/22.7

¹⁾ For ordering information see page B2-43.

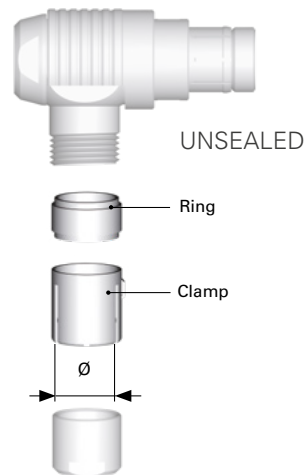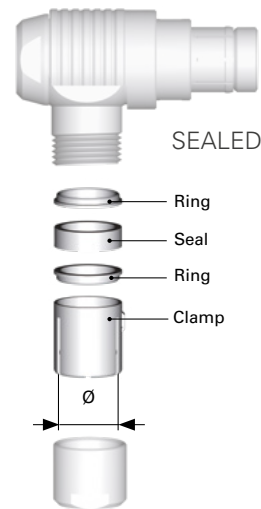WSO 102, 103, 1031, 104 & 105 SIZE**S/U**
SHIELDED/UNSHIELDED**E**
ENVIRONMENTAL

Size	Cable Ø range	Clamp Ø	Cable clamp set ¹⁾	
			Unsealed	Sealed
102	1.5 - 2.1	2.1	E3 102.12/2.1	E3 102.13/2.1
	2.1 - 2.6	2.6	E3 102.12/2.6	E3 102.13/2.6
	2.6 - 3.1	3.1	E3 102.12/3.1	E3 102.13/3.1
	3.1 - 3.6	3.6	E3 102.12/3.6	E3 102.13/3.6
	3.6 - 4.1	4.1	E3 102.12/4.1	E3 102.13/4.1
	4.1 - 4.3	4.3	E3 102.12/4.3	E3 102.13/4.3
	4.3 - 4.7	4.7	E3 102.12/4.7	-
103	1.7 - 2.2	2.2	E3 103.12/2.2	E3 103.13/2.2
	2.2 - 2.7	2.7	E3 103.12/2.7	E3 103.13/2.7
	2.7 - 3.2	3.2	E3 103.12/3.2	E3 103.13/3.2
	3.2 - 3.7	3.7	E3 103.12/3.7	E3 103.13/3.7
	3.7 - 4.2	4.2	E3 103.12/4.2	E3 103.13/4.2
	4.2 - 4.7	4.7	E3 103.12/4.7	E3 103.13/4.7
	4.7 - 5.2	5.2	E3 103.12/5.2	E3 103.13/5.2
	5.2 - 5.7	5.7	E3 103.12/5.7	E3 103.13/5.7
	5.7 - 6.2	6.2	E3 103.12/6.2	E3 103.13/6.2
	6.2 - 6.7	6.7	E3 103.12/6.7	-

Size	Cable Ø range	Clamp Ø	Cable clamp set ¹⁾	
			Unsealed	Sealed
1031	2.2 - 2.7	2.7	E3 1031.12/2.7	E3 1031.13/2.7
	2.7 - 3.2	3.2	E3 1031.12/3.2	E3 1031.13/3.2
	3.2 - 3.7	3.7	E3 1031.12/3.7	E3 1031.13/3.7
	3.7 - 4.2	4.2	E3 1031.12/4.2	E3 1031.13/4.2
	4.2 - 4.7	4.7	E3 1031.12/4.7	E3 1031.13/4.7
	4.7 - 5.2	5.2	E3 1031.12/5.2	E3 1031.13/5.2
	5.2 - 5.7	5.7	E3 1031.12/5.7	E3 1031.13/5.7
	5.7 - 6.2	6.2	E3 1031.12/6.2	E3 1031.13/6.2
	6.2 - 6.7	6.7	E3 1031.12/6.7	E3 1031.13/6.7
	6.7 - 7.2	7.2	E3 1031.12/7.2	-

Size	Cable Ø range	Clamp Ø	Cable clamp set ¹⁾	
			Unsealed	Sealed
104	2.9 - 4.0	4.0	E3 104.12/4.0	E3 104.13/4.0
	4.0 - 4.7	4.7	E3 104.12/4.7	E3 104.13/4.7
	4.7 - 5.7	5.7	E3 104.12/5.7	E3 104.13/5.7
	5.7 - 6.7	6.7	E3 104.12/6.7	E3 104.13/6.7
	6.7 - 7.7	7.7	E3 104.12/7.7	E3 104.13/7.7
	7.7 - 8.7	8.7	E3 104.12/8.7	E3 104.13/8.7

Size	Cable Ø range	Clamp Ø	Cable clamp set ¹⁾	
			Unsealed	Sealed
105	3.2 - 4.2	4.2	E3 105.12/4.2	E3 105.13/4.2
	4.2 - 5.2	5.2	E3 105.12/5.2	E3 105.13/5.2
	5.2 - 6.2	6.2	E3 105.12/6.2	E3 105.13/6.2
	6.2 - 7.2	7.2	E3 105.12/7.2	E3 105.13/7.2
	7.2 - 8.2	8.2	E3 105.12/8.2	E3 105.13/8.2
	8.2 - 9.2	9.2	E3 105.12/9.2	E3 105.13/9.2
	9.2 - 10.0	10.0	E3 105.12/10.0	E3 105.13/10.0
	10.0 - 10.7	10.7	E3 105.12/10.7	E3 105.13/10.7

¹⁾ For ordering information see page B2-43.

MULTIPOLE HIGH VOLTAGE



PLUGS



CABLE MOUNTED

- Body styles (S; SA; SV)..... B2-53
- Technical dimensions B2-54

RECEPTACLES



PANEL MOUNTED

- Body styles (D; DEE; DBEE)..... B2-56
- Technical dimensions B2-57

FOR ALL MULTIPOLE HIGH VOLTAGE

- Electrical & contact configurations..... B2-59
- Options..... B2-38
- Insulating cable clamp sets B2-61
- Accessories B6-2
- Tooling B6-19
- Technical information..... B1-13
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

PLUGS

CABLE
MOUNTED

Body style		S	SA	SV	References to detailed information
Protection	Unsealed (IP50)	•	•	•	Sealing categories, page A-6
	Sealed up to IP68	1)	1)	1)	
Locking system	Friction				Locking systems, page A-5
	Push-pull	•	•	•	
	Quick-release				
	Lanyard		•		
	Tamperproof			•	
Contacts	Crimp				Electrical & contact configurations, page B 2-57
	Solder	•	•	•	
Housing color	Natural chrome	•	•	•	Options, page B 2-35
	Anthracite	•	•		
Design	Shortened body				Body styles, chapter B 1-2
	Right-angle				
Cabling	Cable clamp sets	•	•	•	Insulating cable clamps, B 2-59
	Overmoldable				
	Heat shrinkable				
Accessories	Cable bend reliefs	•	•	•	Accessories, section B 6-2
	Protective sleeves	•			
	Sealing caps	•	•	•	
Size	102 Size				Dimensions, page B 2-52
	103 Size				
	1031 Size				
	104 Size	•	•	•	
	105 Size	•	•	•	
	106 Size	•		•	
	107 Size	•		•	
					For more Information visit our website www.fischerconnectors.com/technical


¹⁾ Clamp sets for sealed or shielded connectors are available on request.

PLUGS

CABLE MOUNTED

S


BODY STYLE

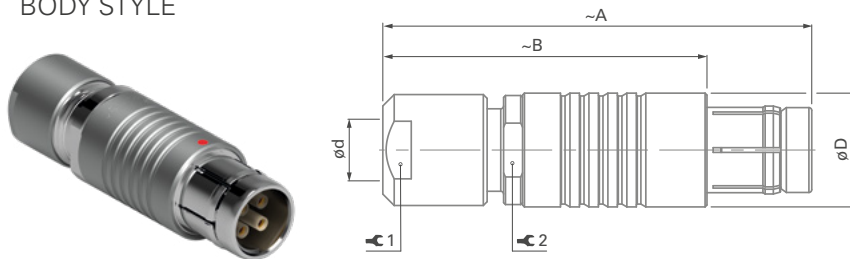

Size	A	B	D	d max	1	Torque 1 [Nm]	2
104	50	38	15	8.6	12	2.0	13
105	62	47	18	10.5	15	3.5	16
106	80	55	30	18.5	22	8.0	-
107	110	85	34	22.7	32	10.0	32

SA

BODY STYLE

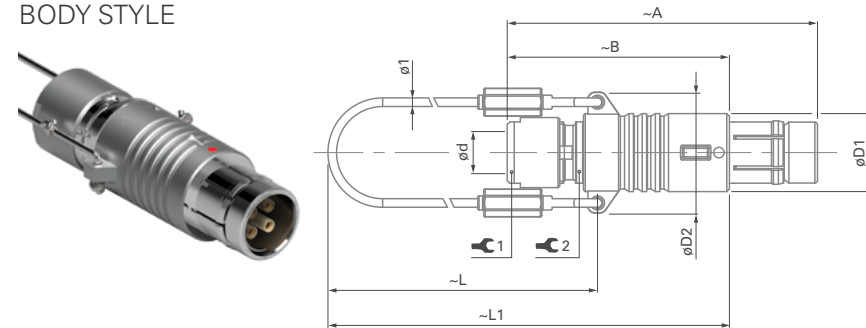


Size	A	B	D1	D2	L	L1	d max	1	Torque 1 [Nm]	2
104	50	38	15	21	65	83	8.6	12	2.0	13
105	62	47	18	25	70	96	10.5	15	3.5	16
106	Please contact us for additional information									
107										

PLUGS

CABLE
MOUNTED

SV

BODY STYLE

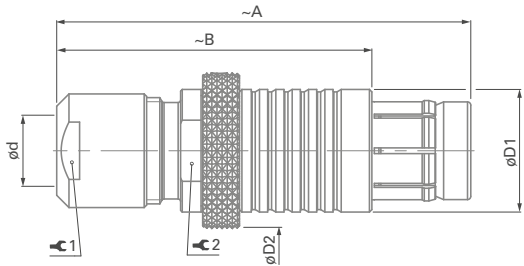

Size	A	B	D1	D2	d max	1	Torque 1 [Nm]	2
104	50	38	15	20	8.6	12	2.0	13
105	62	47	18	22	10.5	15	3.5	16
106	80	55	30	35	18.5	22	8.0	-
107	110	85	34	38	22.7	32	10	32

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket.
Tests have to be made to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

RECEPTACLES**PANEL
MOUNTED**

Body style		D	DEE	DBEE	References to detailed information
Protection	Unsealed (IP50)	•			Sealing categories, page A-6
	Sealed up to IP68 ¹⁾		•	•	
	Hermetic ¹⁾		•	•	
Contacts	Crimp				Electrical & contact configurations, page B 2-57
	Solder	•	•	•	
	PCB				
Housing color	Natural chrome	•	•	•	Options, page B 2-35
	Anthracite	•	•	•	
Design	Right-angle				Body styles, chapter B 1-3
	Flush	•	•		
	Front-projecting			•	
	Bulkhead feedthrough				
Assembly	Front-mounting	•	•	•	Accessories, section B 6-2
	Rear-mounting				
Accessories	Sealing caps	•	•	•	
	Spacers		•		
	Color-coded washers	•			
	Grounding washers	•	•	•	
	Locking washers	•	•	•	
Size	102 Size				Technical dimensions, page B 2-55 For more Information visit our website www.fischerconnectors.com/technical
	103 Size				
	1031 Size				
	104 Size	•	•	•	
	105 Size	•	•	•	
	106 Size	•	•	•	
	107 Size	•	•	•	

¹⁾ Please contact us.

Technical dimensions


FISCHER CORE SERIES **BRASS** – **MULTIPOLE HIGH VOLTAGE**

RECEPTACLES

PANEL MOUNTED

D

BODY STYLE



Size	A	B max.	C	D	M	⌘	Torque [Nm]
104	28	10.5	2.2	19	15x1	17	4.0
105	34	15.0	2	22	18x1	22	6.0
106	51	18.0	3	37	32x1	TX00.106	15
107	63	18.0	4	40	35x1	TX00.107	16

Receptacles of 106 and 107 Sizes are supplied with slotted nuts.

For nut dimensions see Accessories section B 6-2.

For wrenches see section Tooling section, page B 6-19.



Torque [Nm] are recommended values that may be influenced by the quality of the panel surface under the nut.

Tests have to be made to evaluate the exact values.

Other connector styles and contact configurations are available on request.

DEE

BODY STYLE

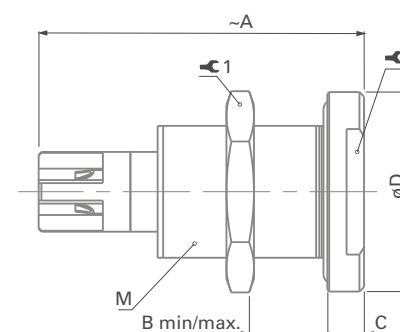


Size	A	B min/max.	C	D	M	⌘ ₁	Torque [Nm]	⌘ ₂
104	35	0/15.5	4	22	16x1	19	4.5	17
105	Please contact us for additional information							
106	54	19.3/24	5	41	32x1	TX00.106	15	–
107	64	19.5/22	5	45	35x1	TX00.107	16	–

All dimensions and images shown are in millimeters and are for reference only.

RECEPTACLES**PANEL**
MOUNTED**DBEE**

BODY STYLE

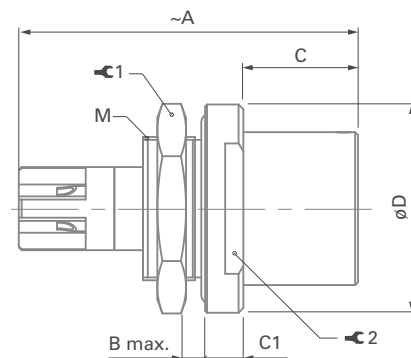

Size	A	B max.	C	C1	D	M	⚙️ 1	Torque [Nm]	⚙️ 2
104	35.5	3.5	16	4	22	16x1	19	4.5	17
105	Please contact us for additional information								
106	54	6.5	25.5	7	40	32x1	TX00.106	15	–
107	64	5	24	5	45	35x1	TX00.107	16	38

A/Z POLARITY

For Multipole High Voltage connectors, it is essential to pay attention to the differences between type "A" and "Z".

Type "A" standard polarity

The contacts of the receptacle are recessed to reduce the possibility of electric shock in the unmated position.

This version should be used when the voltage is sourced from the receptacle.

Type "Z" inverted polarity

The contacts of the plug are recessed to reduce the possibility of electric shock in the unmated position.


This version should be used when the voltage is sourced from the plug.

Protected contacts are usually female contacts recessed in the insulator.


For Multipole High Voltage connectors, however, it is safer to recess the male contacts. In these cases, the plug type "A" is equipped with female contacts and the receptacle with protected male contacts.

EXAMPLE

receptacle
type "A"
D 105 A039



plug
type "A"
S 105 A039



104, 105, 106 & 107 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts	Contact termination		Insulating material	Contact ø [mm]	Wire barrel ø [mm]	Test voltage [kV] in mated position ⁴⁾				Current ¹⁾ [A]
			Solder	Crimp				AC rms		DC		
								Contact to body	Contact to contact	Contact to body	Contact to contact	
104 ^{A⁵⁾} Z 062		4	●		PEEK ⁵⁾	0.9	0.8	4.5	4.0	7.5	6.0	8.0
105 A 057 ⁶⁾		3	●		PTFE	1.3	1.2	4.5	6.0	6.0	8.0	14
105 ^A Z 039 ⁷⁾		5	●		PTFE	1.3	1.2	4.5	4.5	7.0	7.0	11
106 ^A Z 013 ^{8) 9)}		6	●		PTFE	1.3	1.2	7.0	7.0	10.5	10.5	12
107 A 034 ^{2) 3) 10)}		7	●		PTFE	2.0	2.0	6.5	6.0	12.0	11.0	20

¹⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.

²⁾ For clamp sets selection see page B 2-50.

³⁾ See Tooling section, page B 6-24, for insertion tool of contacts.

⁴⁾ Measured with S plug and D receptacle.

⁵⁾ Only PTFE insulator and "A" polarity for DEE and DBEE body styles.

⁶⁾ Only available in D body style with "A" polarity.

⁷⁾ Only available in D body style. Contact us for other body style additional information.

⁸⁾ For DEE "A" polarity, the contact block is composed of two parts : one is PEEK and the second one is PTFE.

⁹⁾ DBEE only available with PEEK insulator and "A" polarity.

¹⁰⁾ Only available "A" polarity.

INSULATED CABLE CLAMP SETS



Multipole High Voltage connectors, as well as Mixed High Voltage and Mixed Coax connectors, are equipped with POM (Delrin®) collet type cable clamps.

These insulated one-piece clamps are fitted for optimal High-Voltage ratings.

Material

POM (Polyoxymethylene) Delrin®

Insulating cable clamp set is included with connector

Multipole high voltage	Mixed high voltage	Mixed coax
------------------------	--------------------	------------

Insulating clamp set Ø should be added to the connector part number separated by Ø (select the collet Ø according to the cable clamping range) and followed by -UI (Unshielded Insulated).

Example

S 104 A062-130 Ø 6.6-UI

104 size 4 pole high voltage S plug with insulating cable clamp set allowing cable diameter included between 4.7 & 6.6 mm

CONNECTOR TYPES WITH INSULATING CABLE CLAMP SETS


Size	Multipole high voltage	Mixed high voltage	Mixed coax
104	104 $\frac{A}{Z}$ 062	104 $\frac{A}{Z}$ 083	104 A 078
			104 A 093
105	105 $\frac{A}{Z}$ 039	105 A 020	105 A 074
	105 A 057	105 A 036	105 A 089
		105 A 060	105 A 095
		105 A 112	
106	106 $\frac{A}{Z}$ 013	106 A 014	
107	Insulating cable clamps set, not available. See page B2-50.		

Size	Cable dia. range	Collet Ø
104	2.4 - 3.4	3.4
	3.0 - 4.0	4.0
	3.6 - 4.6	4.6
	4.7 - 5.7	5.7
	4.7 - 6.6	6.6
	5.8 - 7.7	7.7
	6.2 - 8.1	8.1
	6.7 - 8.6	8.6
105	2.8 - 4.2	4.2
	4.1 - 5.5	5.5
	5.1 - 6.5	6.5
	6.1 - 7.5	7.5
	6.6 - 8.0	8.0
	7.1 - 8.5	8.5
	8.3 - 9.7	9.7
	9.1 - 10.5	10.5

Size	Cable dia. range	Collet Ø
106	4.3 - 5.7	5.7
	5.3 - 6.7	6.7
	5.8 - 7.2	7.2
	7.8 - 9.2	9.2
	9.8 - 11.2	11.2
	11.8 - 13.2	13.2
	13.8 - 15.2	15.2
	14.8 - 17.2	17.2
107	17.1 - 18.5	18.5
	Insulating cable clamps set. Not available. See page B2-50	

B3


CHAPTER

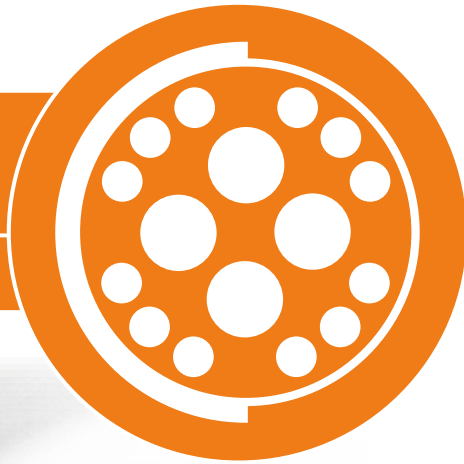

FISCHER CORE SERIES **BRASS** **COAX**

- LOW VOLTAGE B3-2
- HIGH VOLTAGE B3-28

COAX
LOW & HIGH
VOLTAGE

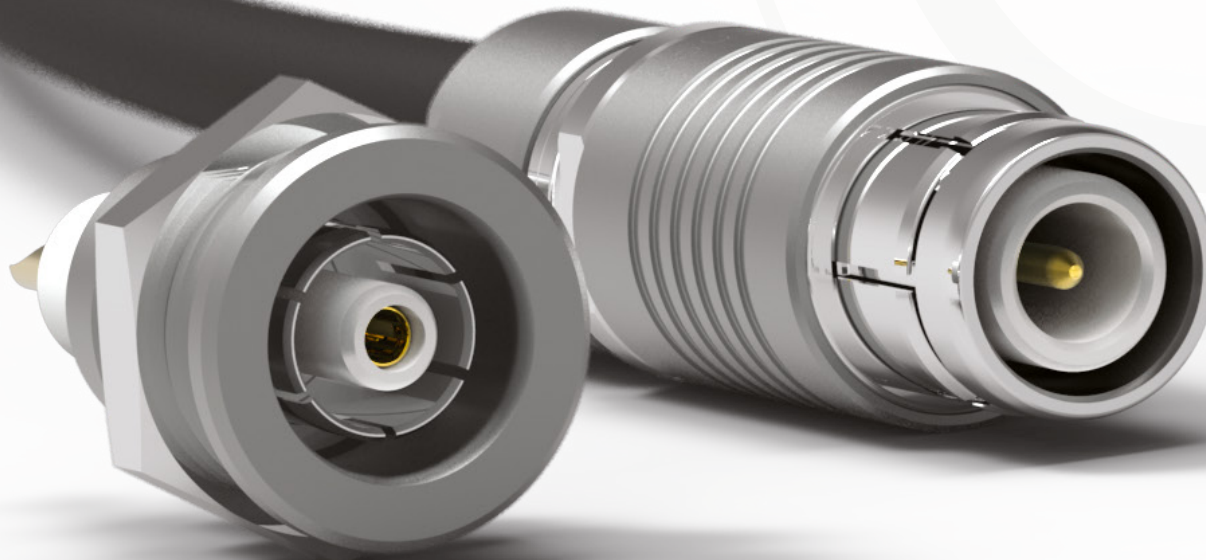

B3-2 / B3-27

COAX

LOW VOLTAGE



PLUGS



CABLE MOUNTED

- Body styles (S/SC; SE/SCE; SOV/SOVE; SA/SAE; SV/SVE; WSO)..... B3-3
- Technical dimensions B3-4



PANEL MOUNTED

- Body styles (SF; SFU/E; SFPU/E)..... B3-16
- Technical dimensions B3-17

RECEPTACLES



CABLE MOUNTED

- Body styles (K/KE) B3-7
- Technical dimensions B3-8



PANEL MOUNTED

- Body styles (D; DEU/E; DB; DBEU/E; DBP; DBPU/E; DBPLU/E; DG; WDE)..... B3-9
- Technical dimensions B3-11



PANEL MOUNTED CABLE

- Body styles (DKBE; DK; DKE) B3-19
- Technical dimensions B3-20

FOR ALL COAX LOW VOLTAGE

- Electrical & contact configurations..... B3-22
- Cable designation B3-24
- Options..... B3-26
- Cable clamp sets included in product except for WSO B3-39
- Accessories B6-2
- Tooling B6-19
- Technical information..... B1-13
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

PLUGS**CABLE
MOUNTED**

Body style		S	SE ¹⁾	SC	SCE ¹⁾	SOV	SOVE ¹⁾	SA	SAE ¹⁾	SV ¹⁾	SVE	WSO	References to detailed information
Protection	Unsealed (IP50)	●		●		●		●		●		●	Sealing categories, page A-6
	Sealed up to IP68		●		●		●		●		●	●	
Locking system	Friction					●	●						Locking systems, page A-5
	Push-pull	●	●					●	●	●	●	●	
	Quick-release			●	●								
	Lanyard							●	●				
	Tamperproof									●	●		
Contacts	Crimp												Electrical & contact configurations, page B3-22
	Solder	●	●	●	●	●	●	●	●	●	●	●	
Housing color	Natural chrome	●	●	●	●	●	●	●	●	●	●	●	Options, page B3-26
	Anthracite	●	●	●	●	●	●	●	●			●	
Design	Shortened body												Body styles, page B1-2
	Right-angle											●	
Cabling	Cable clamp sets	●	●	●	●	●	●	●	●	●	●	●	Cable clamp set included in product except for WSO, page B2-39
	Overmoldable												
	Heat shrinkable												
Accessories	Cable bend reliefs	●	●	●	●	●	●	●	●	●	●	●	Accessories, page B6-2
	Protective sleeves	●	●	●	●	●	●						
	Sealing caps	●	●	●	●	●	●	●	●	●	●	●	
Size	102 Size	●	●	●	●	●	●	●	●	●	●	●	Technical dimensions, page B3-4
	103 Size	●	●	●	●	●	●	●	●	●	●	●	
	1031 Size												
	104 Size	●	●	●	●	●	●	●	●	●	●	●	For more information visit: www.fischerconnectors.com/technical
	105 Size	●	●	●	●	●	●	●	●	●	●	●	
	106 Size												
	107 Size												


¹⁾ Environmental cable clamp set included.

PLUGS

CABLE
MOUNTED

S/SE/SC/SCE


BODY STYLES

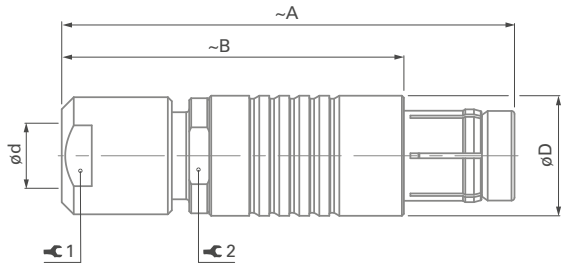

Size	A	B	D	d max		1	Torque 1 [Nm]	2
				Unsealed	Sealed			
102	36	26	9	4.7	4.3	7	0.6	7
103	46	35	12	6.7	6.2	10	1.0	10
104	50	38	15	8.7	8.7	12	2.0	13
105	62	47	18	10.7	10.7	15	3.5	16

SOV/SOVE

BODY STYLE

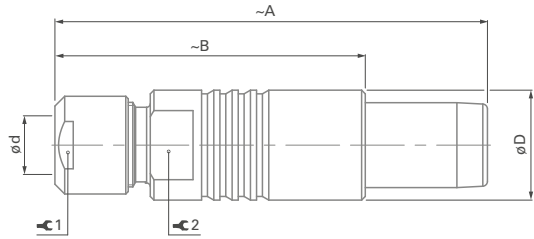

Size	A	B	D	d max		1	Torque 1 [Nm]	2
				Unsealed	Sealed			
102	36	26	9	4.7	4.3	7	0.6	7
103	46	35	12	6.7	6.2	10	1.0	10
104	50	38	15	8.7	8.7	12	2.0	13
105	62	47	18	10.7	10.7	15	3.5	16


Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket.
Tests have to be made to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

PLUGS

CABLE MOUNTED

SA/SAE

BODY STYLE

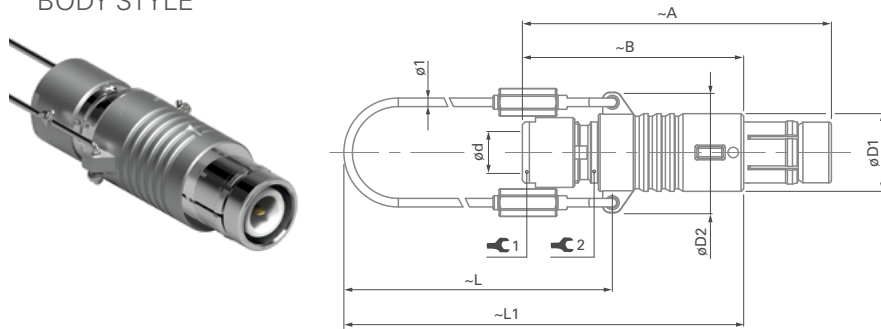


Size	A	B	D1	D2	L	L1	d max		Torque 1 [Nm]	Torque 2 [Nm]
							Unsealed	Sealed		
102	36	26	9	14	50	65	4.7	4.3	0.6	7
103	46	35	12	17	60	77	6.7	6.2	1.0	10
104	50	38	15	21	65	84	8.7	8.7	2.0	13
105	62	47	18	25	70	94	10.7	10.7	3.5	16

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket.

Tests must be conducted to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

SV/SVE

BODY STYLE

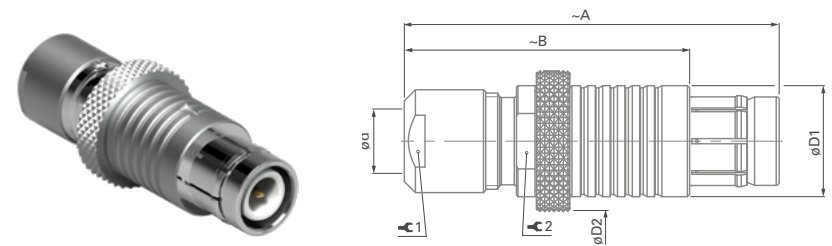


Size	A	B	D1	D2	d max		Torque 1 [Nm]	Torque 2 [Nm]
					Unsealed	Sealed		
102	36	26	9	11	4.7	4.3	0.6	-
103	46	35	12	13	6.7	6.2	1.0	-
104	50	38	15	20	8.7	8.7	2.0	13
105	62	47	18	22	10.7	10.7	3.5	16

PLUGS

CABLE
MOUNTED

WSO

BODY STYLE

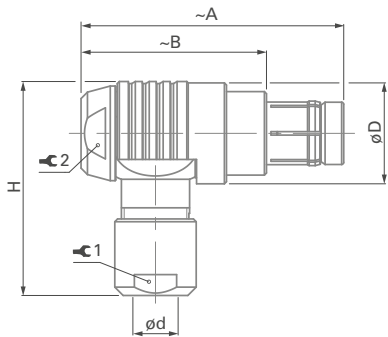

Size	A	B	D	H	d max			Torque 1 [Nm]		Torque 2 [Nm]
					Unsealed	Sealed				
102	33	23	12	25	4.7	4.3	7	0.6	8	1.0
103	38	27	15	31	6.7	6.2	10	1.0	11	1.3
104	45	32	19	37	8.7	8.7	12	2.0	14	2.5
105	53	38	23	45	10.7	10.7	15	3.5	17	3.5

Remark: Layout 102 A017, 104 A002, 104 A060, 105 A090, 105 Z090 are not available in WSO body style.

RECEPTACLES**CABLE
MOUNTED**

Body style		K	KE ¹⁾	References to detailed information
Protection	Unsealed (IP50)	●		Sealing categories, page A-6
	Sealed up to IP68		●	
Contacts	Crimp			Electrical & contact configurations, page B3-22
	Solder	●	●	
Housing	Natural chrome	●	●	Options, page B3-26 Body styles, page B1-3
	Anthracite	●	●	
	Shortened body			
Cabling	Cable clamp sets	●	●	Cable clamp set included in product, pages B2-39
	Overmoldable			
	Heat shrinkable			
Accessories	Cable bend reliefs	●	●	Accessories, page B 6-2
	Protective sleeves	●	●	
	Sealing caps	●	●	
Size	102 Size	●	●	Technical dimensions, page B3-8 For more information visit: www.fischerconnectors.com/technical
	103 Size	●	●	
	1031 Size			
	104 Size	●	●	
	105 Size	●	●	
	106 Size			
	107 Size			


¹⁾ Environmental cable clamp set included.

RECEPTACLES

CABLE
MOUNTED

K/KE

BODY STYLES

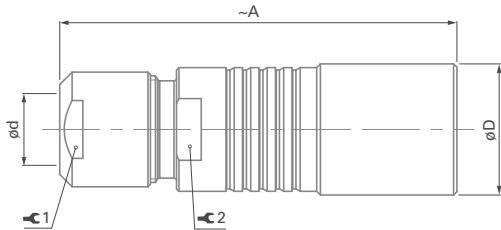

Size	A	B	d max		 1	Torque 1 [Nm]	 2
			Unsealed	Sealed			
102	35	10	4.7	4.3	7	0.6	7
103	43	13	6.7	6.2	10	1.0	10
104	50	16	8.7	8.7	12	2.0	13
105	60	19	10.7	10.7	15	3.5	16

Recommended values that may be influenced by the characteristics of the cable jacket.
Tests must be conducted to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

RECEPTACLES

PANEL
MOUNTED

Body style		D	DEU	DEE	DB	DBEU	DBEE	DBP	References to detailed information
Protection	Unsealed (IP50)	•			•			•	Sealing categories, page A-6
	Sealed up to IP68		•	•		•	•		
	Hermetic			•			•		
Contacts	Crimp								Electrical & contact configurations, page B3-22
	Solder	•	•	•	•	•	•	•	
	PCB								
Housing color	Natural chrome	•	•	•	•	•	•	•	Options, page B3-26
	Anthracite	•	•	•	•	•	•	•	
Design	Right-angle								Body style selection, page B1-3
	Flush	•	•	•				•	
	Front projecting				•	•	•		
	Bulkhead feedthrough								
Assembly	Front-mounting	•	•	•	•	•	•		
	Rear-mounting							•	
Accessories	Sealing caps	•	•	•	•	•	•	•	Accessories, page B6-2
	Spacers		•	•					
	Color-coded washers	•			•			•	
	Grounding washers	•	•	•	•	•	•	•	
	Locking washers	•	•	•	•	•	•	•	
Size	102 Size	•	•	•	•	•	•	•	Technical dimensions, page B3-11 For more information visit: www.fischerconnectors.com/technical
	103 Size	•	•	•	•	•	•	•	
	1031 Size								
	104 Size	•	•	•	•	•	•	•	
	105 Size	•	•	•	•	•	•	•	
	106 Size								
	107 Size								

RECEPTACLES**PANEL
MOUNTED**


Body style		DBPU	DBPE	DBPLU	DBPLE	DG	WDE	References to detailed information
Protection	Unsealed (IP50)					●		Sealing categories, page A-6
	Sealed up to IP68	●	●	●	●		●	
	Hermetic		●		●		●	
Contacts	Crimp							Electrical & contact configurations, page B3-22
	Solder	●	●	●	●	●		
	PCB							
Housing color	Natural chrome	●	●	●	●	●	●	Options, page B3-26
	Anthracite	●	●	●	●	●		
Design	Right-angle							Body styles, page B 1-3
	Flush	●	●			●	●	
	Front projecting			●	●	●	●	
Assembly	Bulkhead feedthrough						●	
	Front-mounting					●	●	
	Rear-mounting	●	●	●	●	●		
Accessories	Sealing caps	●	●	●	●	●	●	Accessories, page B 6-2
	Spacers						●	
	Color-coded washers					●		
	Grounding washers	●	●			●		
	Locking washers	●	●	●	●	●		
Size	102 Size	●	●	●	●	●	●	Technical dimensions, page B3-13 For more information visit: www.fischerconnectors.com/technical
	103 Size	●	●	●	●	●	●	
	1031 Size							
	104 Size	●	●	●	●	●	●	
	105 Size	●	●	●	●	●	●	
	106 Size							
	107 Size							

RECEPTACLES

PANEL MOUNTED

D

BODY STYLE




Size	A	B max.	C1	D	M		Torque 1 [Nm]
102	19	9	1.5	11	9x0.5	11	1.3
103	23	8	1.5	14	12x1	14	2.5
104	25	11	2.2	19	15x1	17	4.0
105	32	15	2.0	22	18x1	22	6.0

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface under the nut.
Tests must be conducted to evaluate the exact values.

DEU/DEE

BODY STYLES




Size	A	B min/max.	C1	D	M	 1	Torque 1 [Nm]	 2
102	20	8/10	2.5	14	9x0.5	11	1.3	-
103	23	0/12	3.0	18	14x1	17	3.0	14
104	25	0/15	4.0	22	16x1	19	4.5	17
105	33	10.5/18	4.0	27	20x1	25	6.5	-

RECEPTACLES

PANEL
MOUNTED

DB


BODY STYLE

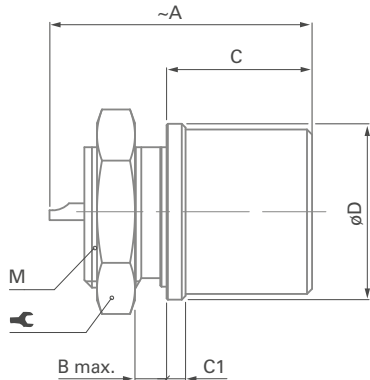

Size	A	B max.	C	C1	D	M		Torque [Nm]
102	18	3	11.0	1.0	11	9x0.5	11	1.3
103	21	4	11.5	1.5	14	12x1	14	2.5
104	26	3	14.5	2.5	19	16x1	19	4.5
105	33	7	19.0	2.0	22	18x1	22	6.0

DBEU/DBEE

BODY STYLES

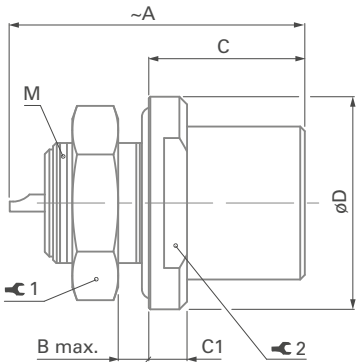


Size	A	B max.	C	C1	D	M	 1	Torque 1 [Nm]	 2
102	20	3.5	10.2	2.5	14	9x0.5	11	1.3	-
103	23	4.0	13.0	3.0	18	14x1	17	3.0	14
104	30	3.5	16.0	4.0	22	16x1	19	4.5	17
105	32	5.0	19.0	4.0	27	18x1	22	6.0	22

RECEPTACLES

PANEL MOUNTED

DBP

BODY STYLE

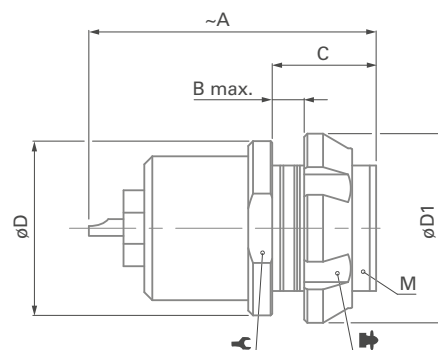

Size	A	B max.	C	D	D1	M		¹⁾	Torque [Nm]
102	20	3.5	6.5	11	12	9x0.5	10	TC00.000	1.3
103	23	4.0	8.0	14	15	12x1	-	TF00.001	2.5
104	26	5.0	9.0	19	19	15x1	-	TK00.000	4.0
105	30	12.0	17.0	22	23	18x1	-	TP00.011	6.0


¹⁾ Assembly tool for decorative slotted nut, see Tooling section, page B 6-20 for details.

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface under the nut.

Tests must be conducted to evaluate the exact values.

DBPU/DBPE

BODY STYLES

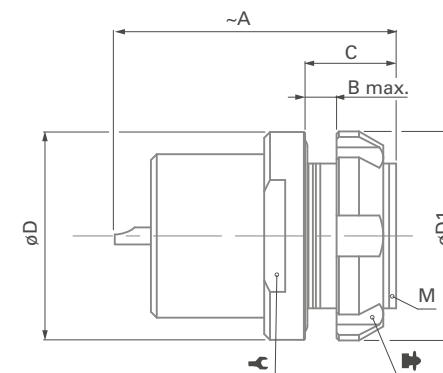


Size	A	B max.	C	D	D1	M		¹⁾	Torque [Nm]
102	20	3.5	6.5	14	12	9x0.5	11	TC00.000	1.3
103	26	4.0	7.8	18	18	14x1	15	TG00.001	3.0
104	26	4.0	8.0	22	20	16x1	-	TK00.002	4.5
105	30	5.0	10.0	27	25	20x1	-	TP00.005	6.5

RECEPTACLES

PANEL
MOUNTED

DBPLU/DBPLE

BODY STYLES

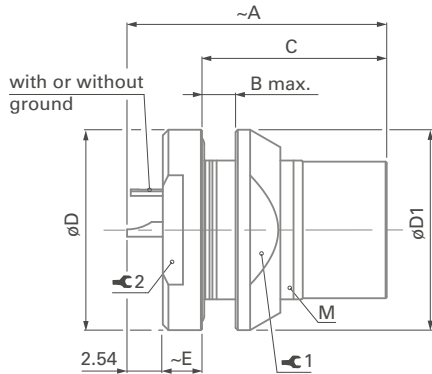


Size	A	B max.	C	D	D1	M		Torque 1 [Nm]	
102	21	4.5	14.2	14	13	10x0.5	11	1.5	11
103	24	5.0	16.5	18	18	14x1	15	3.0	15
104	27	6.5	18.5	22	20	16x1	17	4.5	17
105	31	8.0	22.5	27	25	20x1	22	6.5	22

¹⁾ Assembly tool for decorative slotted nut, see Tooling section, page B 6-20, for details.

DG

BODY STYLE

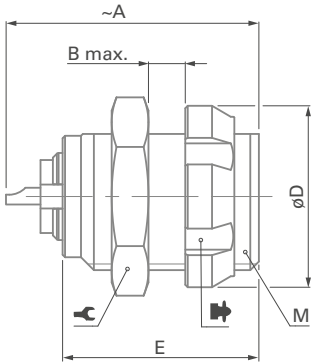


Size	A	B max.	D	E	M		 ¹⁾	Torque [Nm]
102	20	6	12	14	9x0.5	11	TC00.000	1.3
103	23	7	15	15	12x1	14	TF00.001	2.5
104	26	9	19	18	15x1	17	TK00.000	4.0
105	30	15	23	24	18x1	22	TP00.011	6.0

RECEPTACLES

PANEL MOUNTED

WDE FOR 102, 103 & 104 SIZE

BODY STYLE

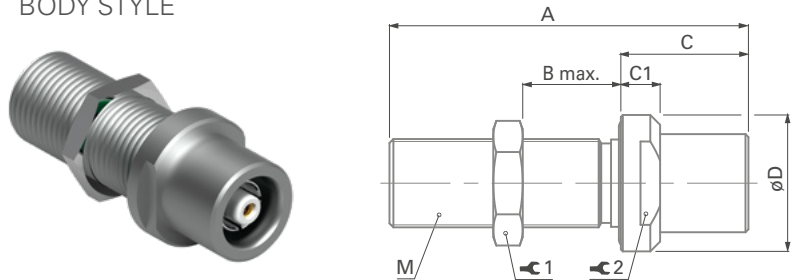

Size	A	B max	C	C1	D	M	1	Torque 1 [Nm]	2
102	39	23	13	4	14	9x0.5	11	1.3	11
103	40	23	14	4	17	12x1	14	2.5	14
104	40	21	16	4	22	15x1	17	4.0	17


The bulkhead feedthrough connector allows the passing of electrical signals and power through a panel via two cable plugs.

The "AZ" version of the feedthrough accepts a type "A" plug on the flange side and a type "Z" plug on the threaded end, which is typically oriented toward the interior of the chassis. In the version "ZA", the connections "A" and "Z" are inverted, see "A/Z Polarity" on page A-10.

Dimension "B max" specifies the maximum panel thickness.

WDE FOR 105 SIZE

BODY STYLE

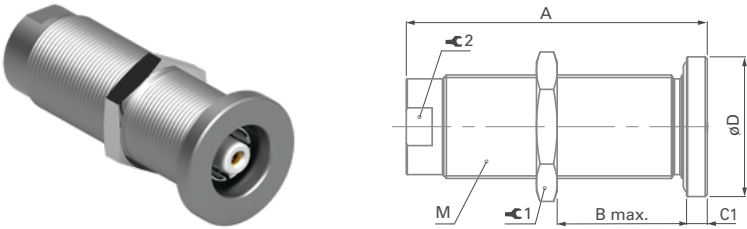

Size	A	B max	C	C1	D	M	1	Torque 1 [Nm]	2
105	62	47	-	4	27	20x1	22	6.5	-

PLUGS**PANEL
MOUNTED**


Body style		SF	SFU	SFE	SFPU	SFPE	References to detailed information
Protection	Unsealed (IP50)	●					Sealing categories, page A-6
	Sealed up to IP68		●	●	●	●	
	Hermetic			●		●	
Contacts	Crimp						Electrical & contact configurations, page B3-22
	Solder	●	●	●	●	●	
	PCB						
Housing color	Natural chrome	●	●	●	●	●	Options, page B3-26
	Anthracite	●	●	●	●	●	
Assembly	Front-mounting	●	●	●			Body styles, page B1-2
	Rear-mounting				●	●	
Accessories	Sealing caps	●	●	●	●	●	Accessories, page B6-2
	Spacers						
	Color-coded washers	●					
	Insulating washers	●					
	Grounding washers	●	●	●			
	Locking washers	●	●	●	●	●	
Size	102 Size	●	●	●	●	●	Technical dimensions, page B3-17 For more information visit: www.fischerconnectors.com/technical
	103 Size	●	●	●	●	●	
	1031 Size						
	104 Size	●	●	●	●	●	
	105 Size	●	●	●	●	●	
	106 Size						
	107 Size						

PLUGS

PANEL
MOUNTED

SF

BODY STYLE




Size	A	B max.	C	C1	D	M		Torque [Nm]
102	20.0	4.0	11.0	1.0	10	9x0.5	11	1.3
103	23.5	3.0	12.5	1.5	14	12x1	14	2.5
104	28.0	3.0	14.0	2.0	18	15x1	17	4.0
105	30.5	5.5	16.8	1.2	22	16x1	19	4.5

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface under the nut.
Tests must be conducted to evaluate the exact values.

SFU/SFE

BODY STYLES

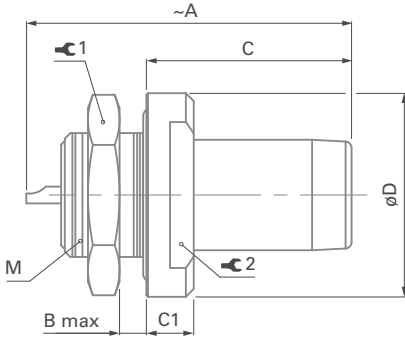


Size	A	B max.	C	C1	D	M		Torque 1 [Nm]	
102	21	2.5	13	3	13	9x0.5	11	1.3	9
103	26	5.0	14	3	17	12x1	14	2.5	12
104	28	7.5	15	3	22	16x1	19	4.5	-
105	32	6.0	19	4	27	20x1	25	6.5	-

PLUGS

PANEL
MOUNTED

SFPU/SFPE

BODY STYLES

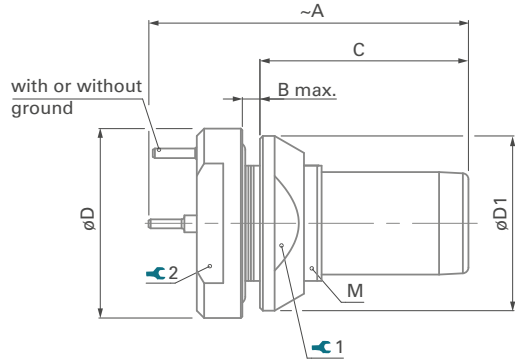

Size	A	B max.	C	D	D1	M	1	Torque 1 [Nm]	2
102	26.0	2.5	15.4	13	12	9x0.5	10	1.3	9
103	29.5	4.0	18.5	17	16	12x1	13	2.5	12
104	33.0	6.0	22.0	22	20	16x1	17	4.5	17
105	36.5	5.0	25.0	27	25	20x1	22	6.5	19

RECEPTACLES


PANEL
MOUNTED CABLE

Body style		DKBE ¹⁾	DK	DKE ¹⁾	Links to detailed information
Protection	Unsealed (IP50)		●		Sealing categories, page A-6
	Sealed up to IP68	●		●	
Contacts	Crimp				Electrical & contact configurations, page B3-22
	Solder	●	●	●	
Housing color	Natural chrome	●	●	●	Options, page B3-26
	Anthracite	●	●	●	
Design	Flush		●		Body styles, page B1-3
	Front-projecting	●		●	
Assembly	Panel-mounted	●	●	●	
	Front-mounting		●	●	
	Rear-mounting	●			
	Cable mounted	●	●	●	
	Cable clamp sets	●	●	●	Cable clamp set included in product, pages B2-39
Accessories	Cable bend reliefs	●	●	●	Accessories, page B6-2
	Sealing caps	●	●	●	
	Spacers			●	
	Color-coded washers	●	●		
	Insulating washers				
	Grounding washers	●	●	●	
	Locking washers	●	●	●	
Size	102 Size	●	●	●	Technical dimensions, page B3-20
	103 Size	●	●	●	
	1031 Size				
	104 Size	●	●	●	
	105 Size	●	●	●	
	106 Size				
	107 Size				
					For more information visit: www.fischerconnectors.com/technical

¹⁾ Environmental cable clamp set included.

RECEPTACLES**PANEL
MOUNTED CABLE****DKBE**

BODY STYLE

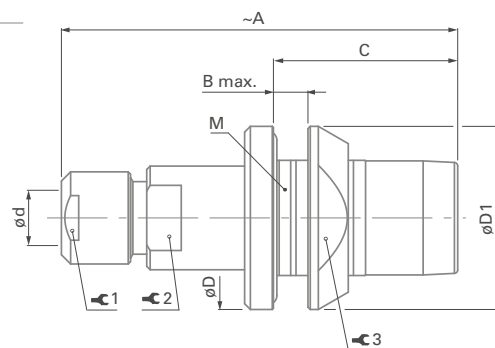

Size	A	B max.	C	D	d max	D1	M
102	35	3.5	16.0	16	4.3	16	12x1
103	43	4.0	19.0	19	6.2	20	15x1
104	50	5.0	22.5	23	8.7	23	18x1
105	60	5.0	26.0	28	10.7	27	22x1

Size	1	Torque 1 [Nm]	2	3	Torque 3 [Nm]
102	7	0.6	7	13	2.5
103	10	1.0	10	17	4.0
104	12	2.0	13	20	6.0
105	15	3.5	16	24	8.0


Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket.

Tests have to be made to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

¹⁾ Cable assembly operation possible only after housing mounted on panel

DK

BODY STYLE

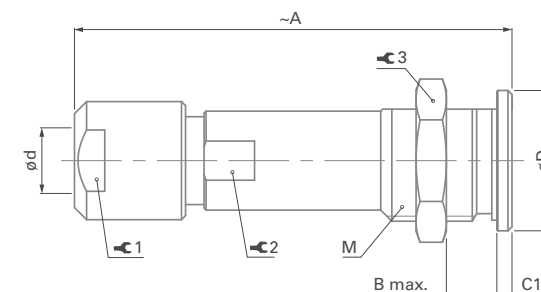

Size	A	B max.	C1	D	d max	M
102	35	9	1.5	11	4.7	9x0.5
103 ¹⁾	44	10	1.5	14	6.7	12x1
104	50	11	2.0	19	8.7	15x1
105 ¹⁾	60	16	2.0	22	10.7	18x1


Size	1	Torque 1 [Nm]	2	3	Torque 3 [Nm]
102	7	0.6	-	11	1.3
103	10	1.0	9	14	2.5
104	12	2.0	12	17	4.0
105	15	3.5	14	22	6.0

RECEPTACLES

PANEL MOUNTED CABLE

DKE FOR 102 & 103 SIZE

BODY STYLES

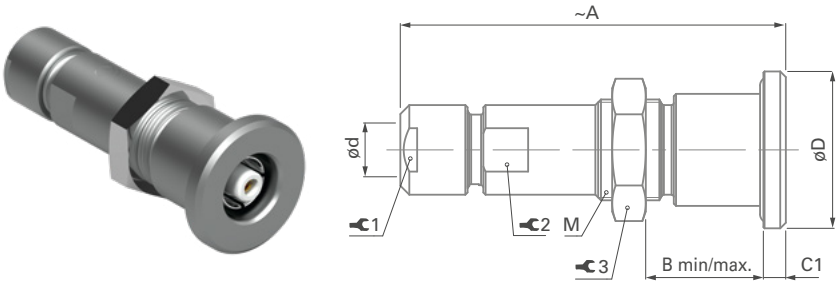


Size	A	B min/max.	C	C1	D	d max	M
102	35	9/12	-	2	14	4.3	9x0.5
103	45	9/14	-	3	17	6.2	14x1

Size	⌘ 1	Torque 1 [Nm]	⌘ 2	⌘ 3	Torque 3 [Nm]
102	7	0.6	7	11	1.3
103	10	1.0	10	17	3.0

DKE FOR 104 & 105 SIZE

BODY STYLES

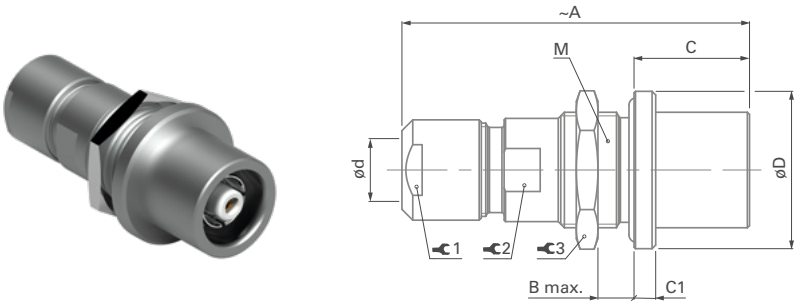

Size	A	B max.	C	C1	D	d max	M
104	50	8	16.0	3	22	8.7	16x1
105	61	9	19.0	4	27	10.7	20x1

Size	⌘ 1	Torque 1 [Nm]	⌘ 2	⌘ 3	Torque 3 [Nm]
104	12	2.0	13	19	4.5
105	15	3.5	16	25	6.5

102 & 103 SIZE

● = Standard ○ = Option

Reference	Pin layout	Contact types		Insulating material	Cable group ¹⁾	Contact $\varnothing$ [mm]	Wire bar- rel $\varnothing$ [mm]	Impe- dance [ohms]	Test voltage ³⁾ [kV] in mated position				Current ²⁾ [A]
		Solder ⁵⁾	Crimp						AC r.m.s.		DC		
									Contact to body	Contact to contact	Contact to body	Contact to contact	
102 A 001		●		PTFE	1/3/5	1.6	1.2	-	1.8	-	2.5	-	14
102 A Z 002		●		PTFE	1/2/3	0.9	0.8	50	3.0	-	5.0	-	10
102 A 017		●		PTFE ⁴⁾	1/2/3	0.7	0.6	75	1.7	-	2.8	-	7.0
103 A Z 001		●		PTFE	3/4/5	2.0	2.0	-	2.2	-	4.2	-	19
103 A Z 002		●		PTFE	1/2/6	1.3	1.2	75	3.8	-	5.4	-	12
103 A 026		●		PTFE	4/5/6	1.6	1.9	50	1.8	-	2.4	-	15

¹⁾ See list of recommended cables on page B3-24.²⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.³⁾ Measured with S plug and D receptacle. Please contact us for ratings for WSO right-angle plugs and WDE bulkhead feedthroughs.⁴⁾ PEEK is mainly used for hermetic connectors.⁵⁾ Solder contact version of DBPLE/DBPLU with ground contact: Ground contact for wire size: max 0.79mm / AWG 21 [1] / AWG 22 [7/30].

104 & 105 SIZE

● = Standard ○ = Option

Reference	Pin layout	Contact types		Insulating material	Cable group ¹⁾	Contact $\varnothing$ [mm]	Wire bar- rel $\varnothing$ [mm]	Impe- dance [ohms]	Test voltage ³⁾ [kV] in mated position				Current ²⁾ [A]
		Solder ⁵⁾	Crimp						AC r.m.s.		DC		
									Contact to body	Contact to contact	Contact to body	Contact to contact	
104 A 002		●		PTFE	6/7	1.6	1.9	75	4.8	-	6.8	-	15
104 A 060		●		PTFE ⁴⁾	4/5/6/7	2.0	1.9	50	4.5	-	6.5	-	13
105 ^A _Z 002		●		PTFE ⁴⁾	5/6/7/8	3.0	2.8	50	4.8	-	7.0	-	30
105 ^A _Z 090		●		PTFE	6/7	1.3	1.2	75	6.4	-	11	-	13

¹⁾ See list of recommended cables on page B3-24.

²⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.

³⁾ Measured with S plug and D receptacle. Please contact us for ratings for WSO right-angle plugs and WDE bulkhead feedthroughs.

⁴⁾ PEEK is mainly used for hermetic connectors.

⁵⁾ Solder contact version of DBPLE/DBPLU with ground contact: Ground contact for wire size: max 0.79mm / AWG 21 [1] / AWG 22 [7/30].

FOR COAX, TRIAX & MIXED COAX CONNECTORS

Gr. No	Designation US MIL-C-17	Impedance ohms	Center conductor			Dielectric		Cable screen		Cable jacket		IEC publication 60096-2 or manufacturer
			Construction		ø [mm]	ø [mm]	Material	ø [mm]	Material	ø [mm]	Material	
0	RG-178B/U	50±2	7 × 0.1	AcCuAg	0.3	0.84	PTFE	1.3	CuAg	1.8	FEP	50-1-1
	RG-196A/U	50±2	7 × 0.1	AcCuAg	0.3	0.84	PTFE	1.3	CuAg	2.0	PTFE	50-1-2
1	RG-174A/U	50±2	7 × 0.16	AcCu	0.48	1.5	PE	2.0	CuSn	2.8	PVC	50-2-1 50-1-1 50-2-3 50-1-2 50-2-2 75-2-1
	RG-174/U	50±2	7 × 0.16	AcCu	0.48	1.5	PE	2.0	CuSn	2.6	PVC	
	RG-178B/U	50±2	7 × 0.1	AcCuAg	0.3	0.84	PTFE	1.3	CuAg	1.8	FEP	
	RG-188A/U	50±2	7 × 0.18	AcCuAg	0.54	1.5	PTFE	2.0	CuAg	2.6	FEP	
	RG-196A/U	50±2	7 × 0.1	AcCuAg	0.3	0.84	PTFE	1.3	CuAg	2.0	PTFE	
	RG-316/U	50±2	7 × 0.18	AcCuAg	0.54	1.5	PTFE	2.0	CuAg	2.5	FEP	
	RG-179B/U	75±3	7 × 0.1	AcCuAg	0.3	1.5	PTFE	2.0	CuAg	2.6	FEP	
	LiYCY 1 × 0.14 mm²	1) 1)	18 × 0.1	CuSn	0.5	1.1	PVC	1.6	CuSn	2.4	PVC	
	LiYCY 1 × 0.04 mm²	2) 2)	20 × 0.05	CuSn	0.4	0.8	PVC	1.3	CuSn	1.6	PVC	
	2	RG-180B/U	95±5	7 × 0.1	AcCuAg	0.3	2.6	PTFE	3.1	CuAg	3.6	
BELDEN 8218		75±3	7 × 0.14	AcCu	0.43	2.54	PE	3.0	CuSn	3.81	PVC	
3	RG-122/U	50±2	27 × 0.13	CuSn	0.8	2.5	PE	3.2	CuSn	4.1	PVC	
	LiYCY 1 × 0.25 mm²	1) 1)	14 × 0.15	CuSn	0.66	1.3	PVC	1.8	CuSn	2.6	PVC	
	LiYCY 1 × 0.38 mm²	2) 2)	19 × 0.16	CuSn	0.8	1.4	PVC	2.0	CuSn	2.9	PVC	
4	RG-58C/U	50±2	19 × 0.18	CuSn	0.9	2.95	PE	3.6	CuSn	5.0	PVC	50-3-1 50-3-7
	RG-141A/U	50±2	1 × 0.95	AcCuAg	0.95	2.95	PTFE	3.6	CuAg	4.8	PTFE	
	RG-142B/U	50±2	1 × 0.95	AcCuAg	0.95	2.95	PTFE	4.3	2x CuAg	5.0	FEP	
	RG-303/U	50±2	1 × 0.95	AcCuAg	0.95	2.95	PTFE	3.6	CuAg	4.3	FEP	
	RG-400/U	50±2	19 × 0.2	CuAg	1.0	2.95	PTFE	4.3	2x CuAg	5.0	FEP	
5	LiYCY 1 × 0.50 mm²	1) 1)	16 × 0.2	CuSn	0.95	1.8	PVC	2.4	CuSn	3.1	PVC	
	LiYCY 1 × 0.75 mm²	1) 1)	24 × 0.2	CuSn	1.2	2.0	PVC	2.6	CuSn	3.2	PVC	
	LiYCY 1 × 0.50 mm²	2) 2)	256 × 0.05	CuSn	1.0	2.0	PVC	2.6	CuSn	3.2	PVC	
	LiYCY 1 × 0.75 mm²	2) 2)	384 × 0.05	CuSn	1.2	2.2	PVC	2.8	CuSn	3.6	PVC	
6	RG-59B/U	75±3	1 × 0.6	AcCu	0.6	3.7	PE	4.5	Cu	6.1	PVC	50-3-5 75-4-6
	RG-223/U	50±2	1 × 0.89	CuAg	0.89	2.95	PE	4.2	2x CuAg	5.4	PVC	
	RG-302/U	75±3	1 × 0.64	AcCuAg	0.64	3.7	PTFE	4.4	CuAg	5.1	FEP	

¹⁾ Insulated, stranded wires with screen and jacket, standardized by the German VDE 0812, for low frequency applications when no defined impedance is required.

²⁾ Insulated, highly flexible stranded wires with screen and jacket, for low frequency applications when no defined impedance is required.

Legend

Cu Plain copper wire
 CuAg Silver plated copper wire
 CuSn Tin plated copper wire
 StCu Copper-clad steel wire
 StCuAg Copper-clad steel wire, silver plated

FEP Fluorethylenepropylene
 FPE Foam polyethylene
 PE Polyethylene
 PTFE Polytetrafluorethylene
 PVC Polyvinyl chloride

CSM Hypalon® (DuPont)

FOR COAX, TRIAX & MIXED COAX CONNECTORS

Gr. No	Designation US MIL-C-17	Impedance ohms	Center conductor		Dielectric		Cable screen		Cable jacket		IEC publication 60096-2 or manufacturer	
			Construction	ø [mm]	ø [mm]	Material	ø [mm]	Material	ø [mm]	Material		
7	RG-212/U	50±2	1 × 1.35	CuAg	1.35	4.7	PE	6.2	2x CuAg	8.5	PVC	Suhner (CH)
	RG-222/U	50±2	1 × 1.37	CrNi	1.37	4.7	PE	6.2	2x CuAg	8.5	PVC	
	SUHNER G 05232	50±2	7 × 0.5	Cu	1.5	4.8	PE	5.6	Cu	7.4	PVC	
	RG-6A/U	75±3	1 × 0.73	AcCu	0.73	4.7	PE	6.2	CuAg	8.5	PVC	
8	RG-115A/U	50±2	7 × 0.75	CuAg	2.25	6.5	PTFE	8.0	2 × CuAg	10.5	PTFE	50-7-8 50-7-1 75-7-1
	RG-165/U	50±2	7 × 0.82	CuAg	2.46	7.25	PTFE	8.0	CuAg	10.4	PTFE	
	RG-213/U	50±2	7 × 0.75	Cu	2.25	7.25	PE	8.2	Cu	10.3	PVC	
	RG-11A/U	75±3	7 × 0.4	CuSn	1.2	7.25	PTFE	8.2	Cu	10.3	PVC	
9	RG-214/U	50±2	7 × 0.75	CuAg	2.25	7.25	PE	8.7	2 × CuAg	10.8	PVC	
	RG-217/U	50±2	1 × 2.7	Cu	2.7	9.4	PE	11.2	2 × Cu	13.8	PVC	
	RG-280/U	50±2	1 × 2.9	Cu	2.9	8.3	PTFE	9.8	2 × CuAg	12.2	PVC	
	RG-12A/U	75±3	RG-11A/U	armoured with zinc plated steel braid			11.8	FeZn	14.0	PVC		
	RG-34B/U	75±3	7 × 0.62	Cu	1.86	11.5	PE	12.4	Cu	16.0	PVC	
10	RG-177/U	50±2	1 × 5.0	Cu	5.0	17.3	PE	18.8	2x CuAg	22.7	PVC	50-17-1 75-17-1
	RG-218/U	50±2	1 × 5.0	Cu	5.0	17.3	PE	18.6	Cu	22.1	PVC	
	RG-164/U	75±3	1 × 2.65	Cu	2.65	17.3	PE	18.6	Cu	22.1	PVC	
11	RG-403/U	50±2	7 × 0.1	AcCuAg	2. screen and jacket :			1.3	CuAg	1.9	FEP	Habia (UK)
	Triaxial							2.4	CuAg	3.1	FEP	
	RG-178	50±2	7 × 0.1	AcCuAg	2. screen and jacket :			1.8	CuAg	2.6	FEP	Filotex (F)
	Type Triax							2.9	CuAg	3.6	FEP	
	SUHNER G 02332	50±2	7 × 0.15	Cu	2. screen and jacket :			2.0	Cu	2.55	PVC	Suhner (CH)
	Triaxial							3.0	Cu	4.25	PVC	
12	BELDEN 9222	50±2	7 × 0.32	CuSn	2. screen and jacket :			3.5	CuSn	4.65	PE	Belden (USA)
	RG-58 Type Triax							5.2	CuSn	6.1	PVC	

COAX LOW & HIGH VOLTAGE, TRIAX & MIXED COAX & MIXED HIGH VOLTAGE

1	Housing color Which housing color do you need?	NATURAL CHROME without guide mark	ANTHRACITE without guide mark
2	Contact block material	PTFE	PTFE
3	Contact type	Solder	Solder
4	Keying code None	-600	-AN700

CONTACT TYPES FOR PANEL MOUNTED CONNECTORS

Applicable for	Last digit	Description
Front mounted: D - DEU/E - DB - DBEU/E - DG - SF - SFU/E	0	Solder contacts
Rear mounted: DBP - DBPU/E - DBPLU/E - DGP - SFPU/E	9	Solder contacts

DESIGN AND ACCESSORIES

Applicable for	Extensions	Description
Receptacles	N	Nickel plated body with bright finish
	E	EPDM interface O-ring
	G	Ground tag
	B	Decorative black slotted nut
	D	Decorative slotted nut
	F	Decorative nut (with 2 flats)
	C	Decorative anthracite slotted nut

Other options are available on request, please contact us.

EXAMPLES

Plugs

SV 103 A002 -600 Ø6.7

Natural chrome housing color with PTFE contact block, solder contacts and cable clamp set (diameter 6.7 mm)

S 104 A060 -600 Ø3.4 - UI

Natural chrome housing color with PTFE contact block, solder contacts and insulating clamp set (diameter 3.4 mm)

Receptacles

DBPLE 102 A002 -AN709EGD

Anthracite housing color with PTFE contact block, solder contacts, EPDM interface O-ring, ground tag and decorative slotted nut

DKBE 103 A026 -600 Ø6.2E

Natural chrome housing color with PTFE contact block, solder contacts, cable clamp set (diameter 6.2 mm) and EPDM interface O-ring

B3-28 / B3-34

COAX HIGH VOLTAGE

PLUGS



CABLE MOUNTED

- Body styles (S; SE; SV; SVE) B 3-29
- Technical dimensions B 3-30

RECEPTACLES



PANEL MOUNTED

- Body styles (D; DEE) B 3-31
- Technical dimensions B 3-32

FOR ALL COAX HIGH VOLTAGE

- Electrical & contact configurations B 3-34
- Cable groups B 3-24
- Options B 3-26
- Cable clamp sets included in product B 2-39
- Accessories B 6-2
- Tooling B 6-19
- Technical information..... B 1-13
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

PLUGS


CABLE
MOUNTED

Body style		S	SE ¹⁾	SV	SVE ¹⁾	References to detailed information
Protection	Unsealed (IP50)	●		●		Sealing categories, page A-6
	Sealed up to IP68		●		●	
Locking system	None					Locking systems, page A-5
	Push-pull	●	●	●	●	
	Quick-release					
	Lanyard					
	Tamperproof			●	●	
Contacts	Crimp					Electrical & contact configurations, page B3-34
	Solder	●	●	●	●	
Housing color	Natural chrome	●	●	●	●	Options, page B3-26
	Anthracite	●	●			
Design	Shortened body					Body styles, page B1-2
	Right-angle					
Cabling	Cable clamp sets	●	●	●	●	Cable clamp set included in product, page B2-39
	Overmoldable					
	Heat shrinkable					
Accessories	Cable bend reliefs	●	●	●	●	Accessories, page B6-2
	Protective sleeves	●	●			
	Sealing caps	●	●	●	●	
Size	102 Size	●	●	●	●	Technical dimensions, page B3-30
	103 Size	●	●	●	●	
	1031 Size					
	104 Size	●	●	●	●	
	105 Size	●	●	●	●	
	106 Size					
	107 Size	●	●	●	●	
						For more information visit: www.fischerconnectors.com/technical


¹⁾ Environmental cable clamp set included.

PLUGS**CABLE
MOUNTED****S/SE**

BODY STYLES

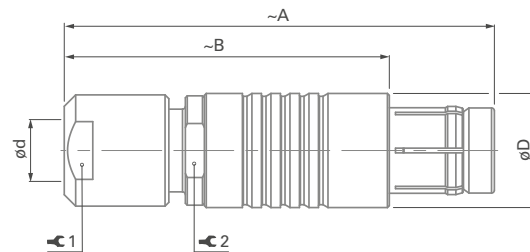**SV/SVE**

BODY STYLES

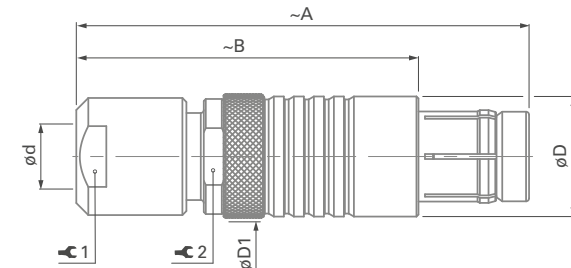**FOR S/SE & SV/SVE**

Type	A	B	D	D1	d max		⚙️ 1	Torque 1 [Nm]	⚙️ 2
					Unsealed	Sealed			
102 $\frac{A}{Z}$ 018	36	26	9	11	4.7	4.3	7	0.6	7
102 $\frac{A}{Z}$ 025	60	46	9	-	5.2	-	Crimping tool and dies ¹⁾ TX00.241 & TX00.251		
103 $\frac{A}{Z}$ 023	46	35	12	13	6.7	6.2	10	1.0	10
104 $\frac{A}{Z}$ 010	50	38	15	20	8.7	8.7	12	2.0	13
105 $\frac{A}{Z}$ 004	62	47	18	22	10.7	10.7	15	3.5	16
105 $\frac{A}{Z}$ 005	62	47	18	22	10.7	10.7	15	3.5	16

¹⁾ Cable screen and jacket (e.g. RG-58) are retained by hex-crimp to the plug shell.

²⁾ For improved safety, the center contact is further recessed than in the S 105 A049.

³⁾ Two wrenches with an opening of 32 mm are required for SV/SVE 107 size.

⁴⁾ For insertion of center contact which has to be assembled after wiring, we recommend tool TP00.000, as shown on the Tooling section, page B 6-24.

Type	A	B	D	D1	d max		⚙️ 1	Torque 1 [Nm]	⚙️ 2
					Unsealed	Sealed			
105 $\frac{A}{Z}$ 049	90	60	18	22	10.7	10.7	15	3.5	16
105 A 108 ²⁾	100	60	18	-	10.7	-	15	3.5	16
107 $\frac{A}{Z}$ 003	110	85	34	38	22.7	-	32	10	32
107 A 004	137	112	34	38	22.7	-	30	10	32
107 $\frac{A}{Z}$ 017	137	112	34	38	22.7	22.7	30 ³⁾	10	32

Suitable Coax cables are indicated in the column "Cable Group" in Electrical & Contact specifications. The cable specifications are listed on page B3-24. If required, we will supply adapter sleeves which must be placed over the cable dielectric during assembly in order to guarantee proper performance. For cable clamps sets see page B2-39. For non-sealed Coax connectors, the collet diameter has to be selected from the tables of type "S-Shielded", and for sealed Coax connectors from the tables of type "Environmental".


Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket. Tests have to be made to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

RECEPTACLES

PANEL MOUNTED				
Body style		D	DEE	References to detailed information
Protection	Unsealed (IP50)	●		Sealing categories, page A-6
	Sealed up to IP68		●	
	Hermetic		●	
Contacts	Crimp			Electrical & contact configurations, page B3-34
	Solder	●	●	
	PCB			
Housing color	Natural chrome	●	●	Options, page B3-26
	Anthracite	●	●	
Design	Right-angle			Body styles, page B1-3
	Flush	●	●	
	Front-projecting			
	Bulkhead feedthrough			
Assembly	Front-mounting	●	●	Accessories, page B6-2
	Rear-mounting			
Accessories	Sealing caps	●	●	
	Spacers		●	
	Color-coded washers	●		
	Grounding washers	●	●	
	Locking washers	●	●	
Size	102 Size	●	●	Technical dimensions, page B3-32
	103 Size	●	●	
	1031 Size			
	104 Size	●	●	For more information visit: www.fischerconnectors.com/technical
	105 Size	●	●	
	106 Size			
	107 Size	●	●	

RECEPTACLES**PANEL
MOUNTED****D**

BODY STYLE

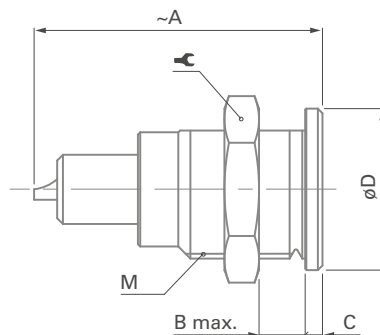

Types	A	B max.	C	D	M		Torque [Nm]
102 $\frac{A}{Z}$ 018	24	8	1.5	11	9x0.5	11	1.3
102 $\frac{A}{Z}$ 025	45	7	2.0	11	9x0.5	11	1.3
103 $\frac{A}{Z}$ 023	27	7	1.5	14	12x1	14	2.5
104 $\frac{A}{Z}$ 010	35	10	2.5	19	15x1	17	4.0
105 $\frac{A}{Z}$ 004	46	15	2.0	22	18x1	22	6.0
105 $\frac{A}{Z}$ 005 ¹⁾	46	15	2.0	22	18x1	22	6.0

¹⁾ Also available with an optional micro switch.

²⁾ For insertion of center contact which has to be assembled after wiring we recommend tool TP00.000, as shown on the Tooling section, page B6-24.



Types	A	B max.	C	D	M		Torque [Nm]
105 $\frac{A^{2)} Z}{Z}$ 049 ¹⁾	63 68	13	2.0	22	18x1	22	6.0
105 A 108 ²⁾	59	13	2.0	22	18x1	22	6.0
107 $\frac{A}{Z}$ 003	72	18	4.0	40	35x1	TX00.107	16
107 A 004	89	18	4.0	40	35x1	TX00.107	16
107 $\frac{A}{Z}$ 017	89	18	4.0	40	35x1	TX00.107	16

RECEPTACLES

PANEL MOUNTED

DEE

BODY STYLE

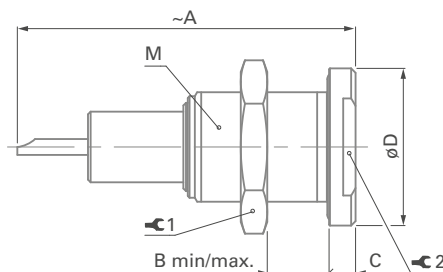

Types	A	B min/max.	C	D	M	⌘ 1	Torque 1 [Nm]	⌘ 2
102 $\frac{A}{Z}$ 018	26	8/12	2	14	9x0.5	11	1.3	-
102 $\frac{A}{Z}$ 025 ¹⁾	45	0.5/7	2	15	11x0.75	14	2.0	-
103 $\frac{A}{Z}$ 023	39 38	0/12	3	18	14x1	17	3.0	14
104 $\frac{A}{Z}$ 010	41 40	0/15	4	22	16x1	19	4.5	17

¹⁾ Non standard dimension of panel cut-out: ø11.1

²⁾ Also available with an optional micro switch.

Types	A	B min/max.	C	D	M	⌘ 1	Torque 1 [Nm]	⌘ 2
105 $\frac{A}{Z}$ 005 ²⁾	46 50	10.5/18	4	27	20x1	25	6.5	-
105 $\frac{A}{Z}$ 049 ²⁾	72 74	10.5/30	4	27	20x1	25	6.5	-
107 $\frac{A}{Z}$ 003	73	19.2/22	5	45	35x1	TX00.107	16	-
107 $\frac{A}{Z}$ 017	90 95	19.2/22	5	45	35x1	TX00.107	16	-

Receptacles of 106 and 107 sizes are supplied with slotted nuts.
For wrenches see Tooling section page B 6-19.

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface. Tests have to be made to evaluate the exact values.

All dimensions and images shown are in millimeters and are for reference only.

102, 103, 104, 105 & 107 SIZE


● = Standard ○ = Option

Reference	Pin layout	Contact types		Insulating material ⁷⁾	Cable group ¹⁾	Contact $\varnothing$ _[mm]	Wire barrel $\varnothing$ _[mm]	Impedance _[ohms]	Test voltage ⁶⁾ _[kV] in mated position				Current ²⁾ _[A]
		Solder	Crimp						AC r.m.s		DC		
									Contact to body	Contact to contact	Contact to body	Contact to contact	
102 $\frac{A}{Z}$ 018		●		PTFE	1/2	0.9	0.8	-	5.0	-	8.0	-	10
102 $\frac{A}{Z}$ 025		●	● ³⁾	PTFE	4	0.9	0.8	50	7.0	-	11	-	10
103 $\frac{A}{Z}$ 023		●		PTFE	4/6	1.3	1.2	50	6.0	-	10	-	12
104 $\frac{A}{Z}$ 010		●		PTFE	4/5/6/7	2.0	1.9	-	7.0	-	10	-	13
105 $\frac{A}{Z}$ 004		●		PTFE	5/7/8	4.0	3.0	40	9.0	-	13	-	32
105 $\frac{A}{Z}$ 005 ⁵⁾		● ○		PTFE PEEK	4/6/7	2.0	2.1	75	9.0	-	14	-	20
105 $\frac{A}{Z}$ 049 ⁵⁾		●		PTFE	4/6/7/8	2.0	2.3	-	11	-	19	-	35
105 A 108 ⁴⁾⁵⁾		●		PTFE	4/6/7/8	2.0	2.5	-	14	-	20	-	23
107 $\frac{A}{Z}$ 003		●		PTFE	7/8/9	4.0	2.8	75	14	-	25	-	45
107 A 004		●		PTFE	7/8/9	4.0	2.8	75	30	-	50	-	45
107 $\frac{A}{Z}$ 017		●		PTFE	7/8/9/10	5.0	5.1	50	30	-	50	-	60

¹⁾ See list of recommended cables on page B3-24.²⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.³⁾ Plug: center contact-crimp / Outer contact-crimp ferrule.
Receptacle: center contact-solder / Outer contact-washer with solder tag.⁴⁾ Plug contains additionally recessed contacts.⁵⁾ See Tooling section, page B6-23, for insertion tool of contact.⁶⁾ Measured with S plug and D receptacle.⁷⁾ PEEK is mainly used for hermetic connectors.


B4

CHAPTER

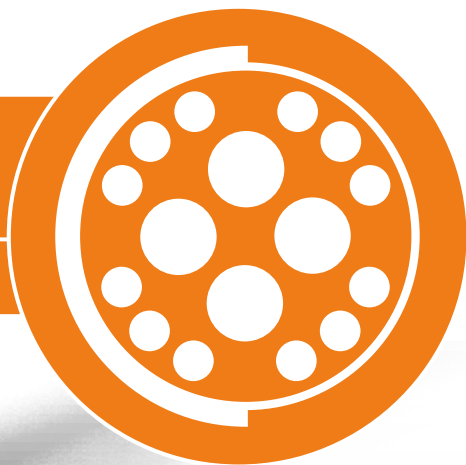

FISCHER CORE SERIES **BRASS** **TRIAx**

TRIAx

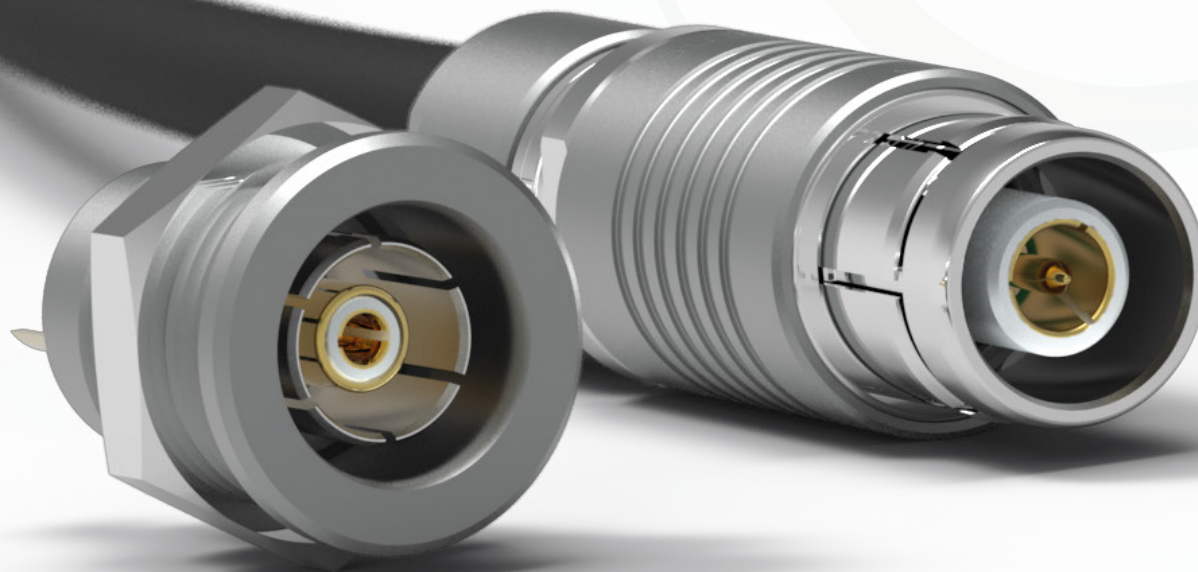

TRIAx

TRIAx

PLUGS



CABLE MOUNTED

- Body styles (S/SC; SOV; SA; SV; WSO)..... B 4-3
- Technical dimensions B 4-4



PANEL MOUNTED

- Body styles (SF; SFU; SFE)..... B 4-13
- Technical dimensions B 4-14

RECEPTACLES



CABLE MOUNTED

- Body styles (K; KE) B 4-7
- Technical dimensions B 4-8



PANEL MOUNTED

- Body styles (D; DEU; DEE; DB; DBEU; DBEE; DG) B 4-9
- Technical dimensions B 4-10



PANEL MOUNTED CABLE

- Body styles (DKBE; DK; DKE) B 4-15
- Technical dimensions B 4-16

FOR ALL TRIAX

- Electrical & contact configurations B 4-18
- Cable designation B 3-24
- Options B 3-26
- Cable clamp sets B 2-39
- Accessories B 6-2
- Tooling B 6-19
- Technical information..... B 1-13
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

PLUGS**CABLE
MOUNTED**


Body style		S	SC	SOV	SA	SV	WSO	Links to detailed information
Protection	Unsealed (IP50)	●	●	●	●	●	●	Sealing categories, page A-6
	Sealed up to IP68	●	●	●	●	●	●	
Locking system	Friction			●				Locking systems, page A-5
	Push-pull	●			●	●	●	
	Quick-release		●					
	Lanyard				●			
	Tamperproof					●		
Contacts	Crimp							Electrical & contact configurations, page B 4-18
	Solder	●	●	●	●	●	●	
Housing color	Natural chrome	●	●	●	●	●	●	Options, page B 3-26
	Anthracite	●	●	●	●		●	
Design	Shortened body							Body styles, page B 1-2
	Right-angle						●	
Cabling	Cable clamp sets	●	●	●	●	●	●	Cable clamp set, page B 2-39
	Overmoldable							
	Heat shrinkable							
Accessories	Cable bend reliefs	●	●	●	●	●	●	Accessories, page B 6-2
	Protective sleeves	●	●	●				
	Sealing caps	●	●	●	●	●	●	
Size	102 Size	●	●	●	●	●	●	Technical dimensions, page B 4-4
	103 Size	●	●	●	●	●	●	
	1031 Size							
	104 Size							For more information visit: www.fischerconnectors.com/technical
	105 Size							
	106 Size							
	107 Size							

PLUGS

CABLE
MOUNTED

S/SC


BODY STYLES

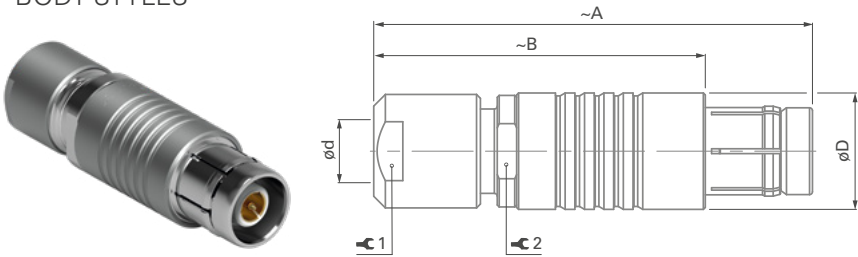

Size	A	B	D	d max		1	Torque 1 [Nm]	2
				Unsealed	Sealed			
102	36	26	9	4.7	4.3	7	0.6	7
103	46	35	12	6.7	6.2	10	1.0	10

SOV

BODY STYLE

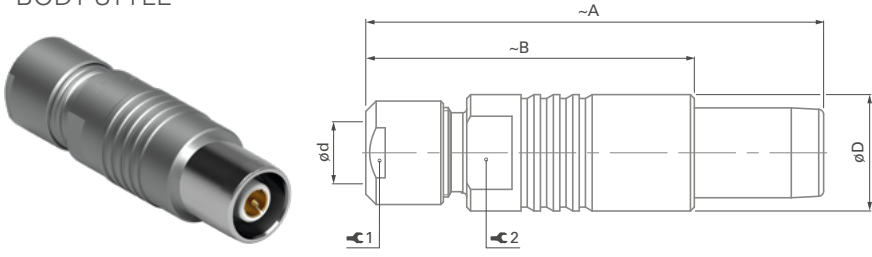


Size	A	B	D	d max		1	Torque 1 [Nm]	2
				Unsealed	Sealed			
102	36	26	9	4.7	4.3	7	0.6	7
103	46	35	12	6.7	6.2	10	1.0	10

PLUGS

CABLE
MOUNTED

SA

BODY STYLE

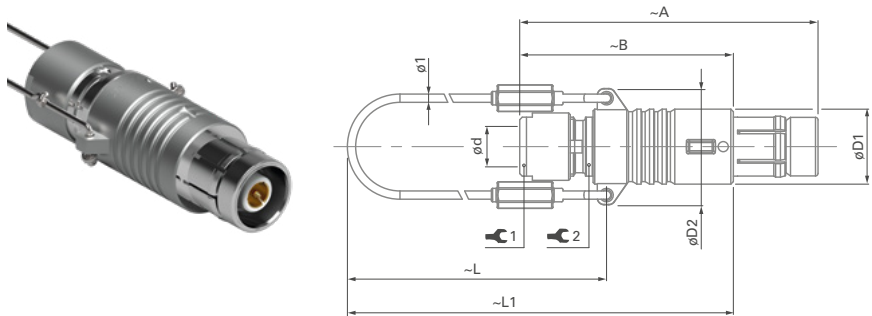


Size	A	B	D1	D2	L	L1	d max		1	Torque 1 [Nm]	2
							Unsealed	Sealed			
102	36	26	9	14	50	65	4.7	4.3	7	0.6	7
103	46	35	12	17	60	77	6.7	6.2	10	1.0	10

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket.
Tests must be conducted to evaluate the exact values.
To secure the cable clamp nut, we recommend the use of thread locking adhesive.

SV

BODY STYLE

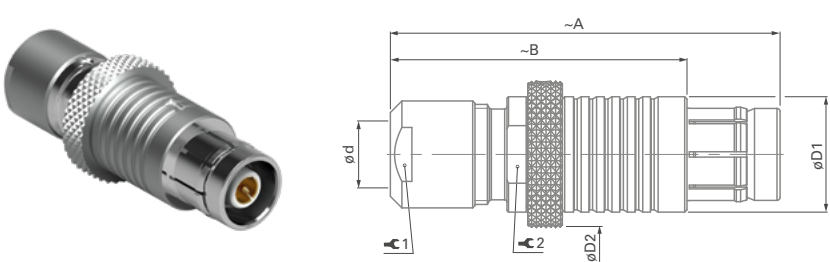


Size	A	B	D1	D2	d max		1	Torque 1 [Nm]	2
					Unsealed	Sealed			
102	36	26	9	11	4.7	4.3	7	0.6	-
103	46	35	12	13	6.7	6.2	10	1.0	-

PLUGS

CABLE
MOUNTED

WSO

BODY STYLE

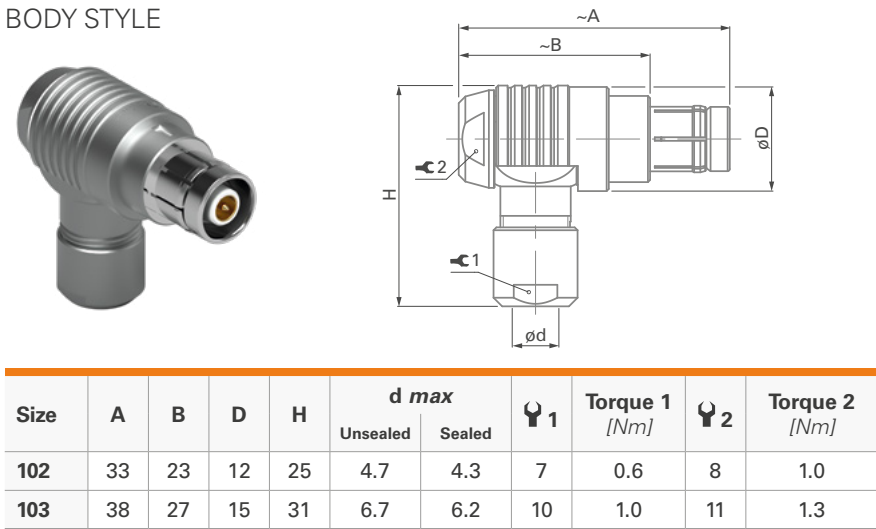

RECEPTACLES**CABLE**
MOUNTED


Body style		K	KE	References to detailed information
Protection	Unsealed (IP50)	●		Sealing categories, page A-6
	Sealed up to IP68		●	
Contacts	Crimp			Electrical & contact configurations, page B4-18
	Solder	●	●	
Housing	Natural chrome	●	●	Options, page B3-26
	Anthracite	●	●	
	Shortened body			
Cabling	Cable clamp sets	●	●	Cable clamp set, page B 2-39
	Overmoldable			
	Heat shrinkable			
Accessories	Cable bend reliefs	●	●	Accessories, page B6-2
	Protective sleeves	●	●	
	Sealing caps	●	●	
Size	102 Size	●	●	Technical dimensions, page B4-8
	103 Size	●	●	
	1031 Size			
	104 Size			For more information visit: www.fischerconnectors.com/technical
	105 Size			
	106 Size			
	107 Size			

RECEPTACLES

CABLE
MOUNTED

K/KE

BODY STYLES

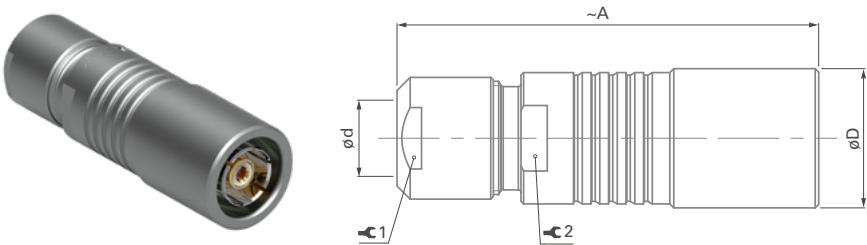

Size	A	D	d max			Torque 1 [Nm]	
			Unsealed	Sealed			
102	35	10	4.7	4.3	7	0.6	7
103	43	13	6.7	6.2	10	1.0	10

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket.
Tests must be conducted to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

RECEPTACLES**PANEL
MOUNTED**


Body style		D	DEU	DEE	DB	DBEU	DBEE	DG	References to detailed information
Protection	Unsealed (IP50)	●			●			●	Sealing categories, page A-6
	Sealed up to IP68		●	●		●	●		
	Hermetic			●			●		
Contacts	Crimp								Electrical & contact configurations, page B 4-18
	Solder	●	●	●	●	●	●	●	
	PCB								
Housing color	Natural chrome	●	●	●	●	●	●	●	Options, page B 3-26
	Anthracite	●	●	●	●	●	●	●	
Design	Right-angle								Body styles, page B 1-3
	Flush	●	●	●				●	
	Front projecting				●	●	●	●	
	Bulkhead feedthrough								
Assembly	Front-mounting	●	●	●	●	●	●	●	
	Rear-mounting							●	
Accessories	Sealing caps	●	●	●	●	●	●	●	Accessories, page B 6-2
	Spacers		●	●					
	Color-coded washers	●			●			●	
	Insulating washers	●	●	●	●	●	●	●	
	Grounding washers	●	●	●	●	●	●	●	
	Locking washers	●	●	●	●	●	●	●	
Size	102 Size	●	●	●	●	●	●	●	Technical dimensions, page B 4-10 For more information visit: www.fischerconnectors.com/technical
	103 Size	●	●	●	●	●	●	●	
	1031 Size								
	104 Size								
	105 Size								
	106 Size								
	107 Size								

RECEPTACLES

PANEL
MOUNTED

D


BODY STYLE



Size	A	B _{max}	C1	D	M		Torque [Nm]
102	19	9	1.5	11	9x0.5	11	1.3
103	23	8	1.5	14	12x1	14	2.5

DEU/DEE

BODY STYLES



Size	A	B _{min/max}	C1	D	M		Torque 1 [Nm]	
102	20	8/10	2.5	14	9x0.5	11	1.3	11 ¹⁾
103	23	0/12	3.0	18	14x1	17	3.0	14


¹⁾Not applicable for 102 A021.

RECEPTACLES

PANEL
MOUNTED

DB

BODY STYLE


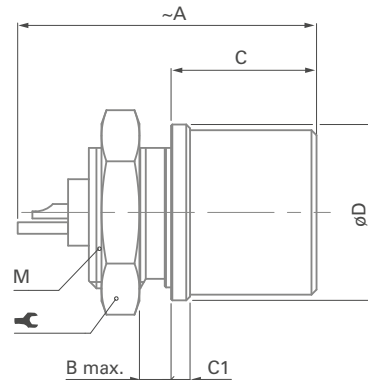


Size	A	B max.	C	C1	D	M		Torque [Nm]
102	18	3	11.0	1.0	11	9x0.5	11	1.3
103	21	4	11.5	1.5	14	12x1	14	2.5

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface.
Tests must be conducted to evaluate the exact values.

DBEU/DBEE

BODY STYLES

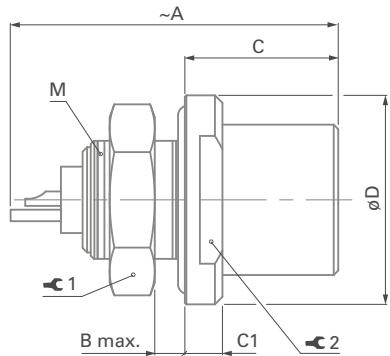


Size	A	B max.	C	C1	D	M	 1	Torque 1 [Nm]	 2
102	20	3.5	10.2	2.5	14	9x0.5	11	1.3	11
103	23	4.0	13.0	3.0	18	14x1	17	3.0	14

RECEPTACLES

PANEL
MOUNTED

DG

BODY STYLE

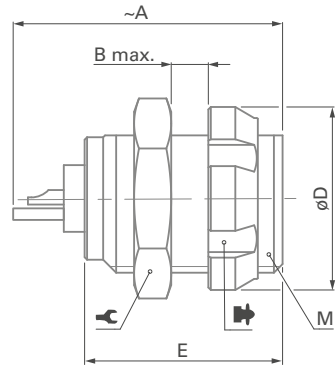

Size	A	B max.	D	E	M			Torque [Nm]
102	20	6	12	14	9x0.5	11	TC00.000	1.3
103	23	7	15	15	12x1	14	TF00.001	2.5

PLUGS**PANEL
MOUNTED**


Body style		SF	SFU	SFE	References to detailed information
Protection	Unsealed (IP50)	●			Sealing categories, page A-6
	Sealed up to IP68		●	●	
	Hermetic			●	
Contacts	Crimp				Electrical & contact configurations, page B4-18
	Solder	●	●	●	
	PCB				
Housing color	Natural chrome	●	●	●	Options, page B3-26
	Anthracite	●	●	●	
Assembly	Front-mounting	●	●	●	Body styles, page B 1-2
	Rear-mounting				
Accessories	Sealing caps	●	●	●	Accessories, page B 6-2
	Spacers				
	Color-coded washers	●			
	Insulating washers	●			
	Grounding washers	●			
	Locking washers	●			
Size	102 Size	●	●	●	Technical dimensions, page B4-14 For more information visit: www.fischerconnectors.com/technical
	103 Size	●	●	●	
	1031 Size				
	104 Size				
	105 Size				
	106 Size				
	107 Size				

PLUGS

PANEL
MOUNTED

SF

BODY STYLE




Size	A	B max.	C	C1	D	M		Torque [Nm]
102	20.0	4.0	11.0	1.0	10	9x0.5	11	1.3
103	23.5	3.0	12.5	1.5	14	12x1	14	2.5

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface.
Tests must be conducted to evaluate the exact values.

SFU/SFE

BODY STYLES

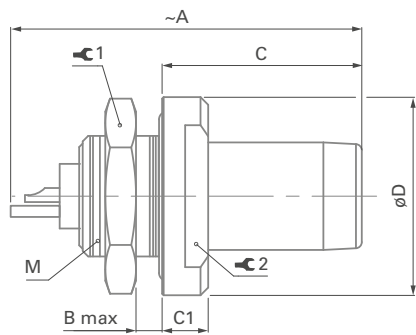

Size	A	B max.	C	C1	D	M		Torque 1 [Nm]	
102	21	2.5	13	3	13	9x0.5	11	1.3	9
103	26	5.0	14	3	17	12x1	14	2.5	12

RECEPTACLES**PANEL**
MOUNTED CABLE

Body style		DKBE	DK	DKE	Links to detailed information
Protection	Unsealed (IP50)		●		Sealing categories, page A-6
	Sealed up to IP68	●		●	
Contacts	Crimp				Electrical & contact configurations, page B 4-18
	Solder	●	●	●	
Housing color	Natural chrome	●	●	●	Options, page B 3-26
	Anthracite	●	●	●	
Design	Flush		●		Body styles, page B 1-3
	Front-projecting	●		●	
Assembly	Panel mounted	●	●	●	
	Front-mounting		●	●	
	Rear-mounting	●			
	Cable mounted	●	●	●	Cable clamp sets, page B 2-39
	Cable clamp sets	●	●	●	
Accessories	Cable bend reliefs	●	●	●	Accessories, page B 6-2
	Sealing caps	●	●	●	
	Spacers			●	
	Color-coded washers	●	●		
	Insulating washers				
	Grounding washers	●	●	●	
	Locking washers	●	●	●	
Size	102 Size	●	●	●	Technical dimensions, page B 4-16
	103 Size	●	●	●	
	1031 Size				
	104 Size				
	105 Size				
	106 Size				
	107 Size				


For more information visit:
www.fischerconnectors.com/technical

RECEPTACLES

PANEL
MOUNTED CABLE

DKBE

BODY STYLE

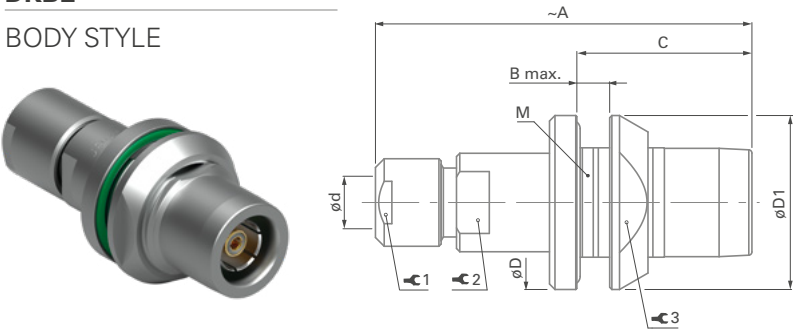


Size	A	B max.	C	D	d max	D1	M
102	35	3.5	16.0	16	4.3	16	12x1
103	43	4.0	19.0	19	6.2	20	15x1

Size	1	Torque 1 [Nm]	2	3	Torque 3 [Nm]
102	7	0.6	7	13	2.5
103	10	1.0	10	17	4.0

¹⁾ Cable assembly operation possible only after housing mounted on panel

DK

BODY STYLE

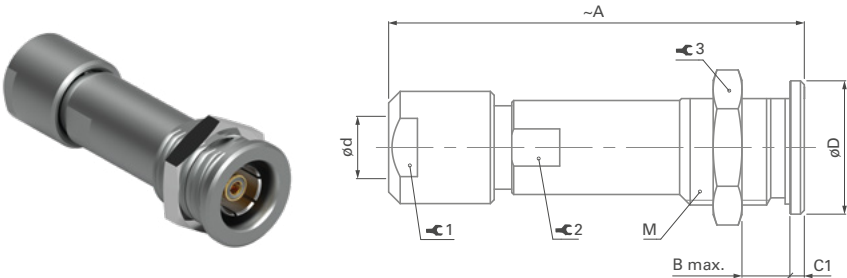

Size	A	B max.	C1	D	d max	M
102	35	9	1.5	11	4.7	9x0.5
103 ¹⁾	44	10	1.5	14	6.7	12x1


Size	1	Torque 1 [Nm]	2	3	Torque 3 [Nm]
102	7	0.6	-	11	1.3
103	10	1.0	9	14	2.5

RECEPTACLES

PANEL
MOUNTED CABLE

DKE

BODY STYLE

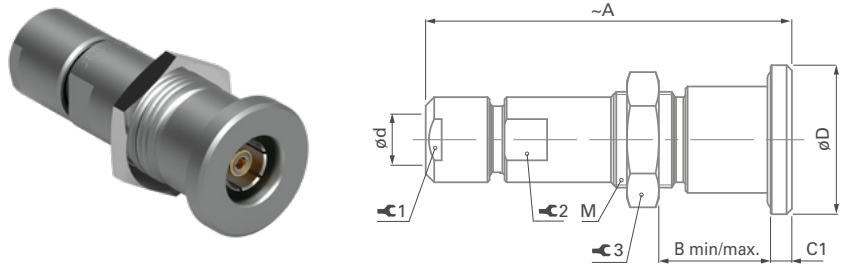

Size	A	B min/max.	C	C1	D	d max	M	1	Torque 1 [Nm]	2	3	Torque 3 [Nm]
102	35	9/12	-	2	14	4.3	9x0.5	7	0.6	7	11	1.3
103	45	9/14	-	3	17	6.2	14x1	10	1.0	10	17	3.0

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket and the quality of the panel surface.
Tests must be conducted to evaluate the exact values.
To secure the cable clamp nut, we recommend the use of thread locking adhesive.

102 & 103 SIZE

● = Standard ○ = Option

Reference	Pin layout	Contact type		Insulating material	Cable group ¹⁾	Contact ø [mm]	Wire barrel ø [mm]	Impedance [ohms]	Test voltage ³⁾ [kV] in mated position				Current ²⁾ [A]
									AC r.m.s		DC		
									Contact to body	Contact to contact	Contact to body	Contact to contact	
102 A014		● ○		PTFE PEEK	11	0.9	0.8	-	1.1	1.2	1.5	1.7	10
102 A021 ⁴⁾		●		PTFE	11	0.9	0.8	50	1.2	1.0	1.7	1.5	10
103 A015		● ○		PTFE PEEK	12	1.3	1.0	50	1.2	1.5	1.6	2.4	12

¹⁾ See list of recommended cables on page B 3-24.²⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.³⁾ Measured with S plug and D receptacle. Please contact us for ratings for WSO right-angle plugs.⁴⁾ Inverted polarity: female contact on plug/male contact on receptacle.


B5

CHAPTER



FISCHER CORE SERIES **BRASS** **MIXED**

- COAX B5-2
- HIGH VOLTAGE B5-16

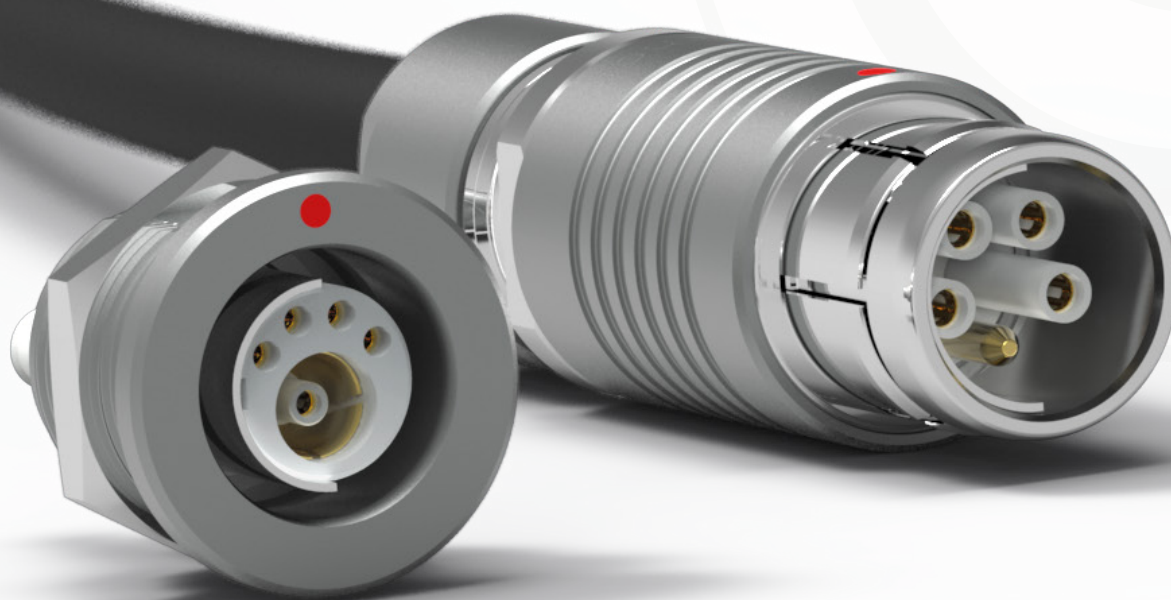

MIXED
COAX & HIGH
VOLTAGE

B5-2 / B5-15

MIXED COAX

Table of contents

PLUGS



CABLE MOUNTED

- Body styles (S/SC; SOV; SA; SV) B5-3
- Technical dimensions B5-4



PANEL MOUNTED

- Body style selection (SF) B5-11
- Technical dimensions B5-12

RECEPTACLES



CABLE MOUNTED

- Body styles (K) B5-6
- Technical dimensions B5-7



PANEL MOUNTED

- Body styles (D; DB; DG) B5-8
- Technical dimensions B5-9



PANEL MOUNTED CABLE

- Body styles (DK) B5-13
- Technical dimensions B5-14

FOR ALL MIXED COAX

- Electrical & contact configurations B5-15
- Cable designation B3-24
- Options B3-26
- Insulating cable clamp sets B2-61
- Accessories B6-2
- Tooling B6-19
- Technical information B1-13
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

PLUGS

CABLE
MOUNTED


Body style		S	SC	SOV	SA	SV	Links to detailed information
Protection	Unsealed (IP50)	●	●	●	●	●	Sealing categories, page A-6
	Sealed up to IP68						
Locking system	Friction			●			Locking systems, A-5
	Push-pull	●			●	●	
	Quick-release		●				
	Lanyard				●		
	Tamperproof					●	
Contacts	Crimp (coax)	●	●	●	●	●	Electrical & contact configurations, page B5-15
	Solder (others)	●	●	●	●	●	
Housing color	Natural chrome	●	●	●	●	●	Options, page B3-26
	Anthracite	●	●	●	●		
Design	Shortened body						Body styles, page B1-2
	Right angle						
Cabling	Cable clamp sets	●	●	●	●	●	Insulating cable clamp sets, page B2-61
	Overmoldable						
	Heat shrinkable						
Accessories	Cable bend reliefs	●	●	●	●	●	Accessories, page B6-2
	Protective sleeves	●	●	●	●		
	Sealing caps	●	●	●	●	●	
Size	102 Size						Technical dimensions, page B5-4 For more information visit: www.fischerconnectors.com/technical
	103 Size						
	1031 Size						
	104 Size	●	●	●	●	●	
	105 Size	●	●	●	●	●	
	106 Size						
	107 Size						

PLUGS

CABLE
MOUNTED

S/SC


BODY STYLES

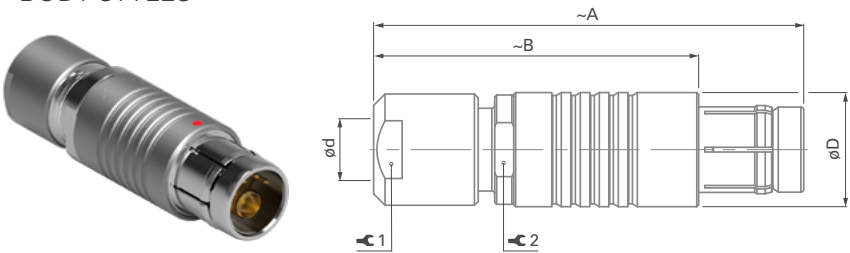

Size	A	B	D	d max		1	Torque 1 [Nm]	2
				Unsealed	Sealed			
104	50	38	15	8.7	8.7	12	2.0	13
105	62	47	18	10.7	10.7	15	3.5	16

SOV

BODY STYLE

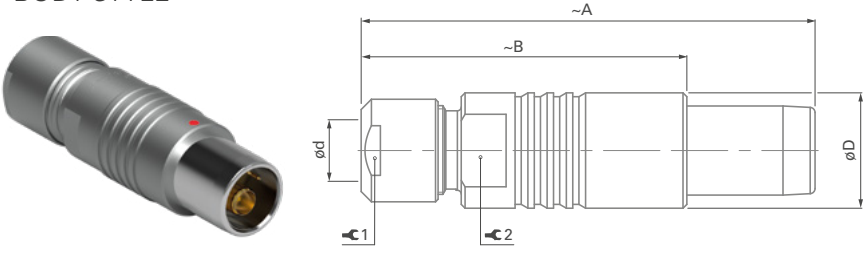

Size	A	B	D	d max		1	Torque 1 [Nm]	2
				Unsealed	Sealed			
104	50	38	15	8.7	8.7	12	2.0	13
105	62	47	18	10.7	10.7	15	3.5	16


Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket.
Tests must be conducted to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

PLUGS

CABLE
MOUNTED

SA


BODY STYLE

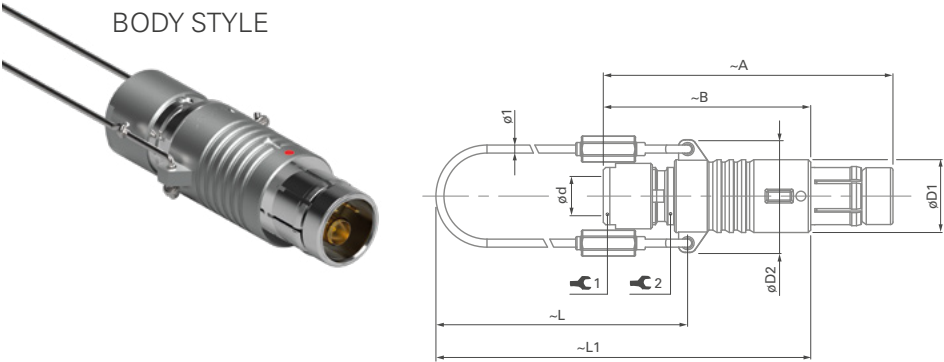

Size	A	B	D1	D2	L	L1	d max			Torque 1 [Nm]	
							Unsealed	Sealed			
104	50	38	15	21	65	84	8.7	8.7	12	2.0	13
105	62	47	18	25	70	94	10.7	10.7	15	3.5	16

SV

BODY STYLE

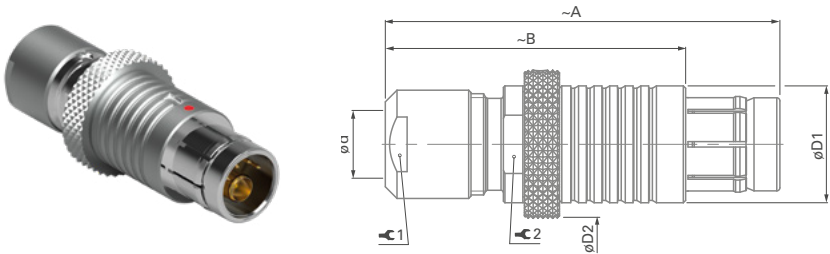

Size	A	B	D1	D2	d max			Torque 1 [Nm]	
					Unsealed	Sealed			
104	50	38	15	20	8.7	8.7	12	2.0	13
105	62	47	18	22	10.7	10.7	15	3.5	16

MIXED
COAX & HIGH
VOLTAGE

RECEPTACLES**CABLE
MOUNTED**


Body style		K	Links to detailed information
Protection	Unsealed (IP50)	●	Sealing categories, page A-6
	Sealed up to IP68		
Contacts	Crimp (coax)	●	Electrical & contact configurations, page B5-16
	Solder (others)	●	
Housing	Natural chrome	●	Options, page B 3-26
	Anthracite	●	
	Shortened body		
Cabling	Cable clamp sets	●	Insulating cable clamp sets, page B 2-61
	Overmoldable		
	Heat shrinkable		
Accessories	Cable bend reliefs	●	Accessories, page B 6-2
	Protective sleeves	●	
	Sealing caps	●	
Size	102 Size		Technical dimensions, page B5-7 For more information visit: www.fischerconnectors.com/technical
	103 Size		
	1031 Size		
	104 Size	●	
	105 Size	●	
	106 Size		
	107 Size		

RECEPTACLES

CABLE
MOUNTED

K

BODY STYLES

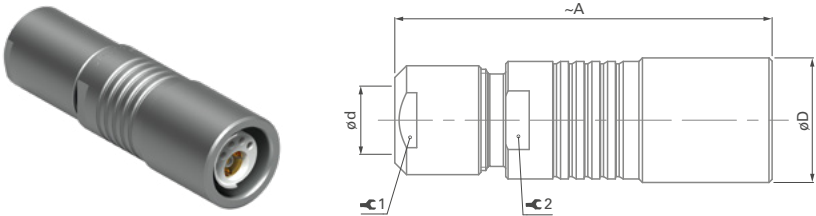

Size	A	D	d max		1	Torque 1 [Nm]	2
			Unsealed	Sealed			
104	50	16	8.7	8.7	12	2.5	13
105	60	19	10.7	10.7	15	3.5	16

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket. Tests must be conducted to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

MIXED
COAX & HIGH
VOLTAGE

RECEPTACLES**PANEL
MOUNTED**

Body style		D	DB	DG	Links to detailed information
Protection	Unsealed (IP50)	●	●	●	Sealing categories, page A-6
	Sealed up to IP68				
	Hermetic				
Contacts	Crimp (coax)	●	●	●	Electrical & contact configurations, page B5-16
	Solder (others)	●	●	●	
	PCB				
Housing color	Natural chrome	●	●	●	Options, page B3-26
	Anthracite	●	●	●	
Design	Right-angle				Body styles, page B1-3
	Flush	●		●	
	Front-projecting		●	●	
	Bulkhead feedthrough				
Assembly	Front-mounting	●	●	●	
	Rear-mounting			●	
Accessories	Sealing caps	●	●	●	Accessories, page B 6-2
	Spacers				
	Color-coded washers	●	●	●	
	Grounding washers	●	●	●	
	Locking washers	●	●	●	
Size	102 Size				Technical dimensions, page B5-9
	103 Size				
	1031 Size				
	104 Size	●	●	●	
	105 Size	●		●	
	106 Size				
	107 Size				


For more information visit:
www.fischerconnectors.com/technical

RECEPTACLES

PANEL
MOUNTED

D

BODY STYLE

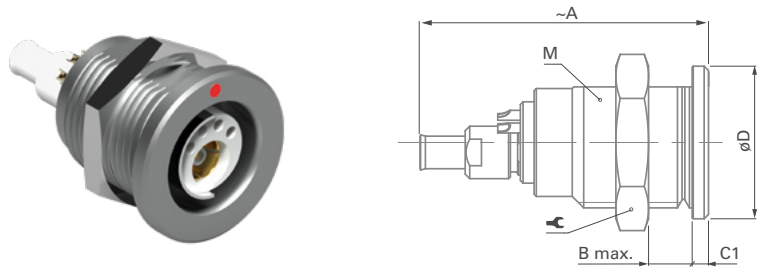


Size	A	B max.	C1	D	M		Torque [Nm]
104	33	11	2.2	19	15x1	17	4.0
105	38	15	2.0	22	18x1	22	6.0

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface.
Tests must be conducted to evaluate the exact values.

DB

BODY STYLE

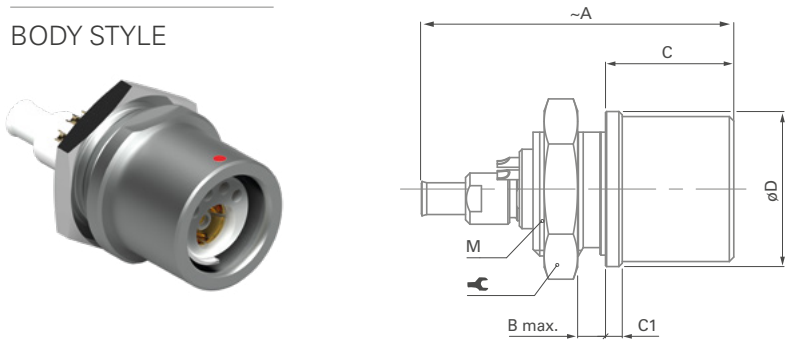


Size	A	B max.	C	C1	D	M		Torque [Nm]
104	33	3	14.5	2.5	19	16x1	19	4.5

MIXED
COAX & HIGH
VOLTAGE

RECEPTACLES

PANEL
MOUNTED

DG
BODY STYLE

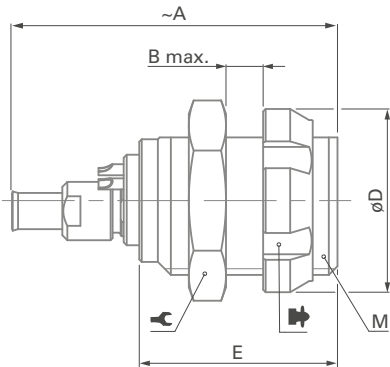

Size	A	B max.	D	E	M		 ¹⁾	Torque [Nm]
104	33	9	19	18	15x1	17	TK00.000	4.0
105	38	15	23	24	18x1	22	TP00.011	6.0

¹⁾ Assembly tool for decorative slotted nut, see Tooling section, page B 6-20 for details.

MIXED
COAX & HIGH
VOLTAGE

PLUGS**PANEL
MOUNTED**


Body style		SF	Links to detailed information
Protection	Unsealed (IP50)	●	Sealing categories, page A-6
	Sealed up to IP68		
	Hermetic		
Contacts	Crimp (coax)	●	Electrical & contact configurations, page B5-16
	Solder (others)	●	
	PCB		
Housing color	Natural chrome	●	Options, section B3-26
	Anthracite	●	
Assembly	Front-mounting	●	Body styles, page B1-2
	Rear-mounting		
Accessories	Sealing caps	●	Accessories, page B6-2
	Spacers		
	Color-coded washers	●	
	Insulating washers	●	
	Grounding washers	●	
	Locking washers	●	
Size	102 Size		Technical dimensions, page B5-12 For more information visit: www.fischerconnectors.com/technical
	103 Size		
	1031 Size		
	104 Size	●	
	105 Size	●	
	106 Size		
	107 Size		

PLUGS

PANEL
MOUNTED

SF

BODY STYLE

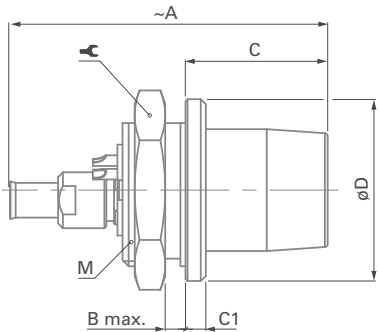

Size	A	B max.	C	C1	D	M		Torque [Nm]
104	28	3.0	14.0	2.0	18	15x1	17	4.0
105	35	5.5	16.8	1.2	22	16x1	19	4.5

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface.
Tests must be conducted to evaluate the exact values.

MIXED
COAX & HIGH
VOLTAGE

RECEPTACLES**PANEL**
MOUNTED CABLE


Body style		DK	References to detailed information
Protection	Unsealed (IP50)	●	Sealing categories, page A-6
	Sealed up to IP68		
Contacts	Crimp (coax)	●	Electrical & contact configurations, page B 5-16
	Solder (others)	●	
Housing color	Natural chrome	●	Options, page B3-26
	Anthracite	●	
Design	Flush	●	Body styles, page B 1-3
	Front-projecting		
Assembly	Panel mounted	●	
	Front-mounting	●	
	Rear-mounting		
	Cable mounted	●	
	Cable clamp sets	●	Insulating cable clamp sets, page B 2-61
Accessories	Cable bend reliefs	●	Accessories, page B 6-2
	Sealing caps	●	
	Spacers		
	Color-coded washers	●	
	Insulating washers		
	Grounding washers	●	
	Locking washers	●	
Size	102 Size		Technical dimensions, page B 5-14
	103 Size		
	1031 Size		
	104 Size	●	For more information visit: www.fischerconnectors.com/technical
	105 Size	●	
	106 Size		
	107 Size		

RECEPTACLES

PANEL
MOUNTED CABLE

DK

BODY STYLE

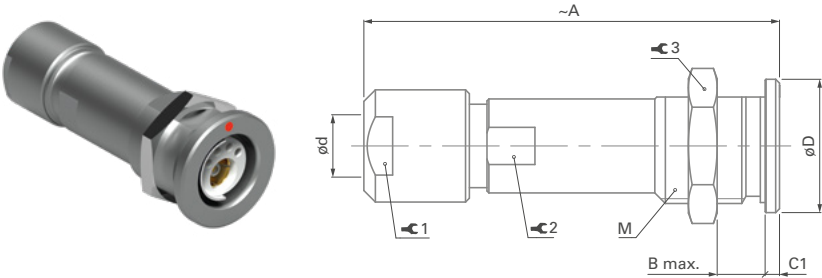

Size	A	B max.	C1	D	d max	M
104	50	11	2.0	19	8.7	15x1
105 ¹⁾	60	16	2.0	22	10.7	18x1

Size	1	Torque 1 [Nm]	2	3	Torque 3 [Nm]
104	12	2.0	12	17	4.0
105	15	3.5	14	22	6.0

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket.
Tests have to be made to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

¹⁾ Cable assembly operation possible only after housing mounted on panel

104 & 105 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact type		Insulating material	Cable group ¹⁾	Contact ø _[mm]	Wire barrel ø _[mm]	Impedance _[ohm]	Test voltage ⁵⁾ _[kV] in mated position				Current ³⁾ _[A]
				Solder	Crimp						AC r.m.s		DC		
											Contact to body ²⁾	Contact to contact	Contact to body ²⁾	Contact to contact	
104 A 078		2	Coax 1		●	PEEK ⁴⁾	1	0.7	0.6	50	1.8	-	3.0	-	4.0
				●				0.9	0.8	-	0.8	-	1.6	-	9.0
104 A 093		5	Coax 4		●	PTFE	1	0.7	0.6	50	1.8	-	3.0	-	4.0
				●				0.7	0.6	-	0.8	1.0	1.0	1.4	4.0
105 A 074 ⁶⁾		2	Coax 1		●	PTFE	4	1.3	1.0	50	4.5	-	6.0	-	12.0
				●				1.3	1.1	-	1.6	-	2.0	-	12.0
105 A 089 ⁶⁾		5	Coax 4		●	PTFE	4	1.3	1.0	50	4.5	-	6.0	-	12.0
				●				0.9	0.75	-	1.5	2.0	2.3	2.8	7.0
105 A 095 ⁶⁾		10	Coax 9		●	PTFE	1	0.7	0.55	50	1.8	-	3.5	-	4.0
				●				0.9	0.75	-	1.4	1.5	2.2	2.5	6.0

¹⁾ See list of recommended cables on page B3-24.²⁾ Test voltages between contact and body, as well as between contact and coaxial outer contact.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ PEEK for main insulator and PTFE for Coax.⁵⁾ Measured with S plug and D receptacle.⁶⁾ DB body style not available.

MIXED HIGH VOLTAGE

PLUGS



CABLE MOUNTED

- Body styles (S; SV) B 5-17
- Technical dimensions B 5-18

RECEPTACLES



PANEL MOUNTED

- Body styles (D) B 5-19
- Technical dimensions B 5-20

FOR ALL MIXED HIGH VOLTAGE

- Electrical & contact configurations B 5-21
- Options B 3-26
- Insulating cable clamp sets B 2-61
- Accessories B 6-2
- Tooling B 6-19
- Technical information B 1-13
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

PLUGS**CABLE
MOUNTED**


Body style		S	SV	Links to detailed information
Protection	Unsealed (IP50)	●	●	Sealing categories, page A-6
	Sealed up to IP68			
Locking system	Friction			Locking systems, page A-5
	Push-pull	●	●	
	Quick-release			
	Lanyard			
	Tamperproof		●	
Contacts	Crimp			Electrical & contact configurations, page B 5-21
	Solder	●	●	
Housing color	Natural chrome	●	●	Options, page B 3-26
	Anthracite	●		
Design	Shortened body			Body styles, page B 1-2
	Right-angle			
Cabling	Cable clamp sets	●	●	Insulating cable clamp sets, page B 2-61 Cable assembly, page A-16
	Overmoldable			
	Heat shrinkable			
Accessories	Cable bend reliefs	●	●	Accessories, page B 6-2
	Protective sleeves	●		
	Sealing caps	●	●	
Size	102 Size			Technical dimensions, page B 5-18 For more information visit: www.fischerconnectors.com/technical
	103 Size			
	1031 Size			
	104 Size	●	●	
	105 Size	●	●	
	106 Size	●	●	
	107 Size			

PLUGS

CABLE
MOUNTED

S


BODY STYLE

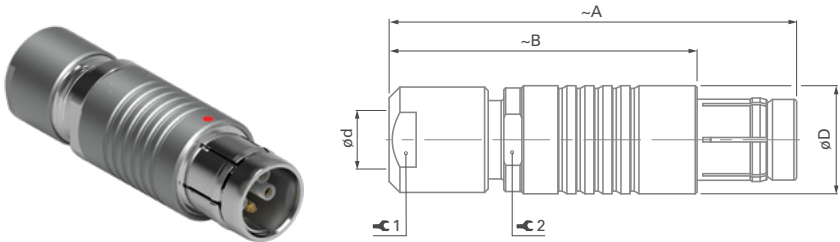

Size	A	B	D	d max			Torque 1 [Nm]	
				Unsealed	Sealed			
104	50	38	15	8.7	8.7	12	2.0	13
105	62	47	18	10.7	10.7	15	3.5	16
106	80	55	28	19.2	19.2	22	8.0	-

SV

BODY STYLE

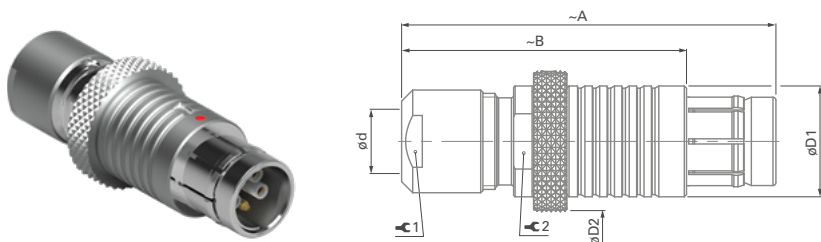

Size	A	B	D1	D2	d max			Torque 1 [Nm]	
					Unsealed	Sealed			
104	50	38	15	20	8.7	8.7	12	2.0	13
105	62	47	18	22	10.7	10.7	15	3.5	16
106	80	55	28	35	19.2	19.2	22	8.0	-

For insertion of female high voltage contacts which have to be assembled after wiring, we recommend tool TP00.000, shown on the Tooling section, page B 6-24.

These connectors are supplied with insulating cable clamps sets. The available inner diameters are listed on page B 2-61.

Some of these versions, however, can be delivered with special metal clamps, allowing the clamping of a cable screen. Please contact us for more information.

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket.
Tests must be conducted to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

RECEPTACLES**PANEL
MOUNTED**


Body style		D	Links to detailed information
Protection	Unsealed (IP50)	●	Sealing categories, page A-6
	Sealed up to IP68		
	Hermetic		
Contacts	Crimp		Electrical & contact configurations, page B5-21
	Solder	●	
	PCB		
Housing color	Natural chrome	●	Options, page B3-26
	Anthracite	●	
Design	Right-angle		Body styles, page B1-3
	Flush	●	
	Front-projecting		
	Bulkhead feedthrough		
Assembly	Front-mounting	●	Accessories, page B6-2
	Rear-mounting		
Accessories	Sealing caps	●	
	Spacers		
	Color-coded washers	●	
	Grounding washers	●	
	Locking washers	●	
Size	102 Size		Technical dimensions, page B5-20 For more information visit: www.fischerconnectors.com/technical
	103 Size		
	1031 Size		
	104 Size	●	
	105 Size	●	
	106 Size	●	
	107 Size		

RECEPTACLES

PANEL
MOUNTED

D


BODY STYLE



Types	A	B max.	C	D	M		Torque [Nm]
104 ^A / _Z 083	31	10.5	2.2	19	15x1	17	4.0
105 A 112	34	15.0	2.0	22	18x1	22	6.0

D

BODY STYLE

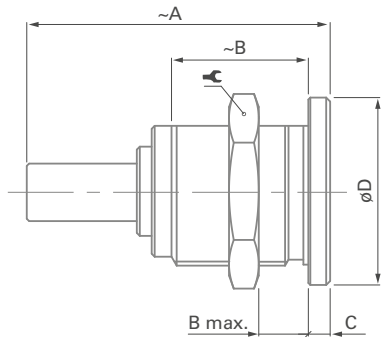

Types	A	B max.	C	D	M		Torque [Nm]
105 A 020 ¹⁾	54	15	2	22	18x1	22	6.0
105 A 036 ¹⁾	54	15	2	22	18x1	22	6.0
105 A 060 ¹⁾	58	15	2	22	18x1	22	6.0
106 A 014 ²⁾	49	18	3	37	32x1	TX00.106	15

¹⁾**105 Size**
The high voltage center contact is retained in a special insulator. To achieve proper high voltage performance, the window for soldering of the wire has to be covered by the supplied insulating tube, which must be placed over the cable before soldering.

²⁾ The D 106 A014 is supplied with a slotted nut.
The required hook spanner TX00.106 is shown on page B 6-20.
For insertion of male high voltage contacts which have to be assembled after wiring, we recommend tool TP00.001, shown on page B 6-24.

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface. Tests must be conducted to evaluate the exact values.

A/Z POLARITY

For Mixed High Voltage connectors, it is essential to pay attention to the differences between type "A" and "Z".

Type "A" Standard Polarity

The contacts of the receptacle are recessed to reduce the possibility of electric shock in the unmated position.

This version should be used when the voltage is sourced from the receptacle.

Type "Z" Inverted Polarity

The contacts of the plug are recessed to reduce the possibility of electric shock in the unmated position.

This version should be used when the voltage is sourced from the plug.


Protected contacts are usually female contacts recessed in the insulator. For Mixed High Voltage connectors, however, it is safer to recess the male contacts.

In these cases, the plug type "A" is equipped with female contacts and the receptacle with protected male contacts.


This applies to all connectors on page B5-24 except 104 ^A/_Z 083 and 105 A 112.

EXAMPLE

receptacle
type "A"
D 105 A036



plug
type "A"
S 105 A036



FOR 104, 105 & 106 SIZE

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact type		Insulating material	Contact $\varnothing$ ²⁾ [mm]	Wire barrel $\varnothing$ [mm]	Test voltage ⁶⁾ [kV] in mated position				Current ¹⁾ [A]
				Solder	Crimp				AC r.m.s		DC		
									Contact to body	Contact to contact	Contact to body	Contact to contact	
104 A 083 ⁵⁾ Z		3	2 HV	●		PTFE	0.9	0.8	4.0	4.0	6.0	6.0	8.0
			1	●			1.6	1.8	2.2	4.5	3.5	6.5	18
105 A 020 ³⁾		3	1 HV	●		PTFE	2.0	2.0	6.0	6.0	14	14	20
			2	●			1.3	1.1	1.8	3.8	2.5	5.0	12
105 A 036 ³⁾		5	1 HV	●		PTFE	2.0	2.0	6.0	6.0	14	14	18
			4	●			1.3	1.1	1.8	2.0	2.5	3.0	12
105 A 060 ³⁾		8	1 HV	●		PTFE	2.0	2.0	6.0	6.0	14	14	16
			7	●			1.3	1.1	1.8	1.6	3.0	2.8	10
105 A 112 ⁴⁾		5	4 HV	●		PTFE	1.3	1.2	4.5	4.5	7.0	7.0	11
			1	●			2.0	2.0	2.0	4.5	3.0	7.0	11
106 A 014 ³⁾		8	2 HV	●		PTFE	2.0	2.4	7.0	15	14	23	16
			6	●			1.3	1.1	2.2	2.6	5.0	4.0	9.0

¹⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.

²⁾ Contact dia 2.0 is positioned to make contact first and break last.

³⁾ See Tooling section, page B6-24, for insertion tool of contact dia. 2.0.


⁴⁾ HV contacts are female and LV contact is male on plug.

⁵⁾ All contacts are male on plug with type A standard polarity.

⁶⁾ Measured with S plug and D receptacle.

B6

CHAPTER

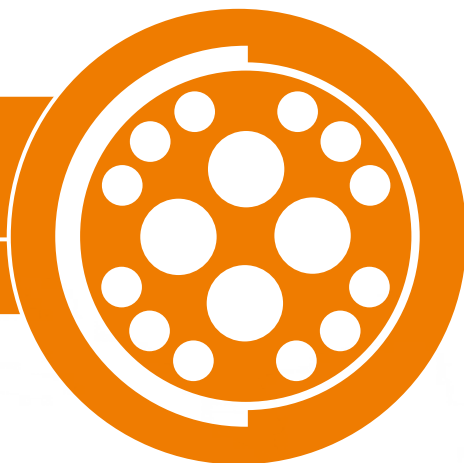

FISCHER CORE SERIES **BRASS** **ACCESSORIES & TOOLING**


- ACCESSORIESB6-2
- TOOLINGB6-19



CABLE MOUNTED PLUGS & RECEPTACLES

CABLE BEND RELIEFS

FOR INCREASED PROTECTION OF YOUR CONNECTIONS

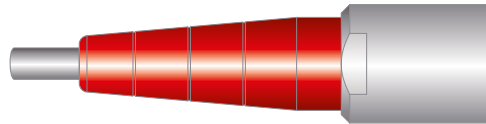

Suitable for:


- Cable mounted plugs (S/SC, SOV, SA, SV, WSO)
- Cable mounted receptacles (K/KE)
- Panel mounted cable receptacles (DKBE, DK, DKE)

Prevent cable torsion and increase protection of connection.

Color coding for easy identification when combined with color washer on a panel mounted connector.

KNURLED CLAMP NUTS

FOR RESISTANT HEAT SHRINKING

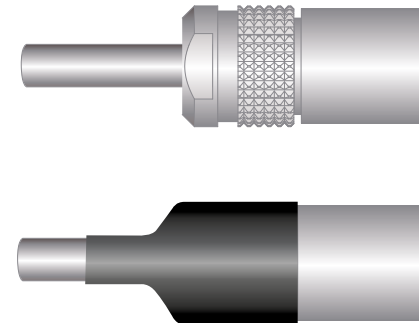

Suitable for:


- Cable mounted plugs (S/SC, SOV, SA, SV, WSO)
- Cable mounted receptacles (K/KE)
- Panel mounted cable receptacles (DKBE, DK, DKE)

Facilitates grip for a heat shrinkable tube acting as cable bend relief.

CABLE MOUNTED PLUGS & RECEPTACLES

PROTECTIVE SLEEVES

FOR IMPROVED PROTECTION

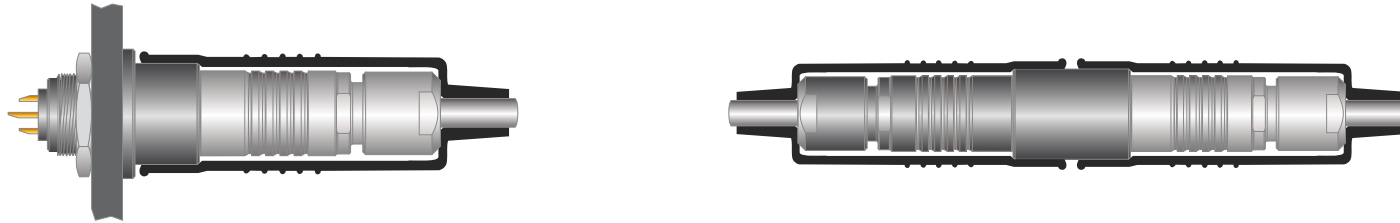

Suitable for:

- Cable mounted plugs (S/SC, SOV)
- Cable mounted receptacles (K/KE)

Protect against any foreign matter:

- Dust, dirt or mud
- Liquid splash


Minimize mechanical damage from impact on hard surfaces.

When mated, the front end of the protective sleeve encloses the projecting portion of the receptacle. When unmated, connectors can be protected with sealing caps.

PLUGS & RECEPTACLES


SEALING CAPS

FOR PROTECTION OF UNMATED CONNECTORS IN THE FIELD

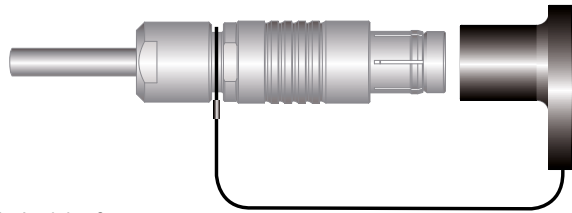

Suitable for:

- Cable mounted plugs (S/SC, SOV, SA, SV, SS/SSC, WSO)
- Cable mounted receptacles (K/KE, KS/KSE)



Suitable for:


- Panel mounted receptacles (D, DEU/E, DB, DBEU/E, DBP, DBPU/E, DBPLU/E, DG/DGP, DBPC, WDE)
- Panel mounted plugs (SF, SFU/E, SFPU/E)
- Panel mounted cable receptacles (DKBE, DK, DKE)

SOFT CAPS



- Lightweight
- Noiseless operation
- Operating temperature – 55°C to + 85°C
- IP68
- Easily installed
- Available in single-piece or lanyard model
- Intermateable to provide additional dust protection

METAL CAPS




- Rugged
- Fitted with an o-ring seal
- Operating temperature – 30°C to + 200°C
- Protect & seal the mating face of the connector
- IP68
- State colors available

PANEL MOUNTED PLUGS & RECEPTACLES

SPACERS

TO ALLOW MOUNTING ON ALL PANELS




Suitable for:

- Feedthrough (WDE)
- Panel mounted receptacles (DEE, DEU, DKE)

Enables mounting on panels or bulkheads thinner than the unthreaded section.

COLOR CODING WASHERS

FOR EASY CONNECTOR IDENTIFICATION



Suitable for:

- Panel mounted receptacles (D, DB, DBP, DBPC, DG, DGP, DK)
- Panel mounted plug (SF)

Can be mounted between the connector flange and the panel.

Color coding for easy identification when combined with colored cable bend relief for cable mounted connectors.


Not suitable for sealed version.



PANEL MOUNTED PLUGS & RECEPTACLES

INSULATING & COLOR WASHERS


FOR EASY CONNECTOR
IDENTIFICATION AND
EFFICIENT INSULATION

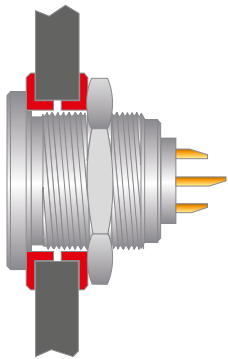

Suitable for panel mounted receptacle (D):

- Can be mounted on both sides of the panel cut-out
- Color coding for easy identification when combined with colored cable bend relief for cable mounted connectors.
- Isolate the connector body electrically from the panel
- Not suitable for sealed versions


GROUNDING WASHERS

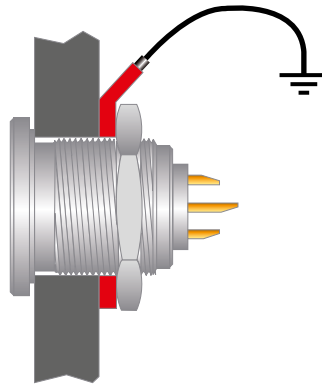

Suitable for panel mounted connectors

LOCKING WASHERS


TO ALLOW SECURE MOUNTING
ON ALL PANELS

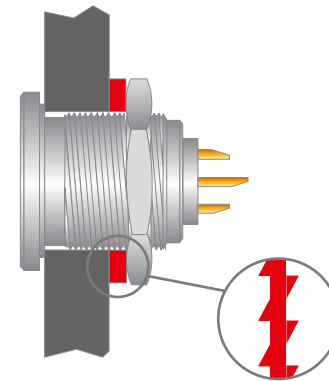

Suitable for panel mounted connectors

KNURLED CLAMP NUTS & CABLE BEND RELIEFS


KNURLED CLAMP NUTS

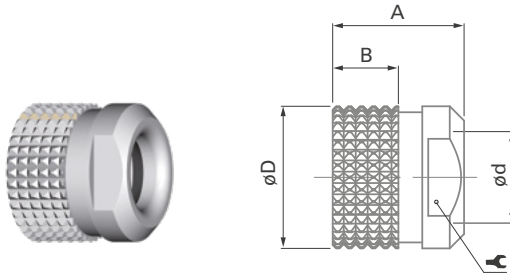

Size	A	B	D	d	7	Part number
102	6	3.0	9	4.8	7	102.1869
103	11	5.5	12	6.5	10	103.2092
1031	12	5.5	13	7.2	12	1031.248
104	11	5.5	15	8.5	12	104.2103
105	14	7.5	18	11.0	15	105.2626

Material: nickel and chromium plated brass (ISO CuZn39Pb3)

CABLE BEND RELIEFS

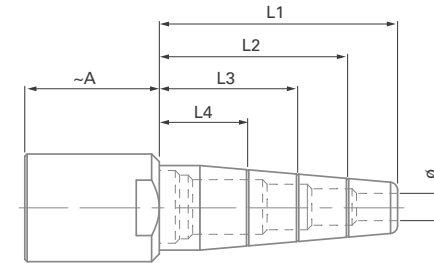

Size ¹⁾	Cable ø range	Length	A
102	1.5 - 3.4	L1 = 21	10
	3.5 - 4.5	L1 = 21	
103	3.0 - 4.0	L1 = 26	17
	4.0 - 5.0	L2 = 21	
	5.0 - 6.2	L3 = 16	
1031	3.0 - 4.0	L1 = 26	18
	4.0 - 5.0	L2 = 21	
	5.0 - 6.5	L3 = 16	

¹⁾ For the 102 Size, cable bend reliefs are designed specifically for a given cable ø range.

For all other Sizes, cable bend reliefs have to be cut to length L1, L2, L3 or L4 to fit your cable ø range.

Material:

Clamp nut: nickel and chromium plated brass (ISO CuZn39Pb3)

Bend relief: TPE (Thermoplastic elastomer)

These cable bend reliefs cannot be assembled with the clamp nuts supplied with the standard connectors.

Therefore, the cable bend reliefs are supplied as sub-assemblies.

Size ¹⁾	Cable ø range	Length	A
104	4.0 - 5.0	L1 = 31	18
	5.0 - 6.5	L2 = 25	
	6.0 - 7.5	L3 = 18	
105	4.0 - 5.0	L1 = 37	21
	5.5 - 6.5	L2 = 31	
	7.0 - 8.5	L3 = 24	
	8.5 - 10.5	L4 = 18	


CABLE BEND RELIEFS**NATURAL CHROME**
CONNECTORS**PART NUMBERS**

Size ¹⁾	Cable ø range	Bend relief color						
		White	Black	Green	Blue	Yellow	Red	Grey
102	1.5 - 3.4	-	E4 102.190.2	E4 102.190.3	E4 102.190.4	E4 102.190.5	E4 102.190.6	E4 102.190.7
	3.5 - 4.5	-	E4 102.192.2	E4 102.192.3	E4 102.192.4	E4 102.192.5	E4 102.192.6	E4 102.192.7
103	3.0 - 6.2	E4 103.190.1	E4 103.190.2	E4 103.190.3	E4 103.190.4	E4 103.190.5	E4 103.190.6	E4 103.190.7
1031	3.0 - 6.5	E4 1031.190.1	E4 1031.190.2	E4 1031.190.3	E4 1031.190.4	E4 1031.190.5	E4 1031.190.6	E4 1031.190.7
104	4.0 - 7.5	E4 104.190.1	E4 104.190.2	E4 104.190.3	E4 104.190.4	E4 104.190.5	E4 104.190.6	E4 104.190.7
105	4.0 - 10.5	E4 105.190.1	E4 105.190.2	E4 105.190.3	E4 105.190.4	E4 105.190.5	E4 105.190.6	E4 105.190.7

ANTHRACITE
CONNECTORS**PART NUMBERS**


Size ¹⁾	Cable ø range	Bend relief color						
		White	Black	Green	Blue	Yellow	Red	Grey
102	1.5 - 3.4	-	E4 102.291.2	E4 102.291.3	E4 102.291.4	E4 102.291.5	E4 102.291.6	E4 102.291.7
	3.5 - 4.5	-	E4 102.293.2	E4 102.293.3	E4 102.293.4	E4 102.293.5	E4 102.293.6	E4 102.293.7
103	3.0 - 6.2	E4 103.291.1	E4 103.291.2	E4 103.291.3	E4 103.291.4	E4 103.291.5	E4 103.291.6	E4 103.291.7
1031	3.0 - 6.5	E4 1031.291.1	E4 1031.291.2	E4 1031.291.3	E4 1031.291.4	E4 1031.291.5	E4 1031.291.6	E4 1031.291.7
104	4.0 - 7.5	E4 104.291.1	E4 104.291.2	E4 104.291.3	E4 104.291.4	E4 104.291.5	E4 104.291.6	E4 104.291.7
105	4.0 - 10.5	E4 105.291.1	E4 105.291.2	E4 105.291.3	E4 105.291.4	E4 105.291.5	E4 105.291.6	E4 105.291.7

¹⁾ For the 102 Size, cable bend reliefs are designed specifically for a given cable ø range.
For other Sizes, cable bend reliefs have to be cut to length L1, L2, L3 or L4 to fit your cable ø range.

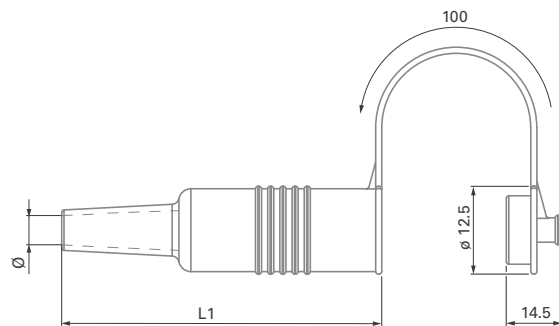PROTECTIVE SLEEVES - 102 SIZE**S/SC & SOV**


Size	Cable Ø Range	L1	Part number
102	1.8 - 4.5	56	102.785

Material: TPE (Thermoplastic elastomer).

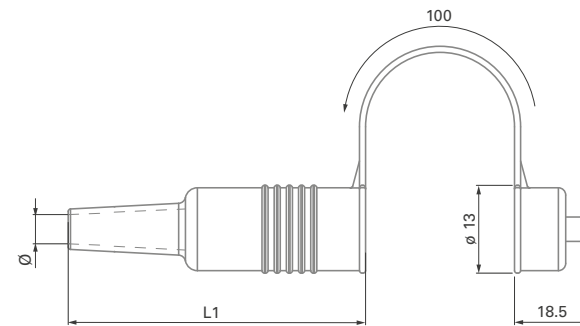K & KE

Size	Cable Ø Range	L1	Part Number
102	1.8 - 4.5	47	102.786

Material: TPE (Thermoplastic elastomer).

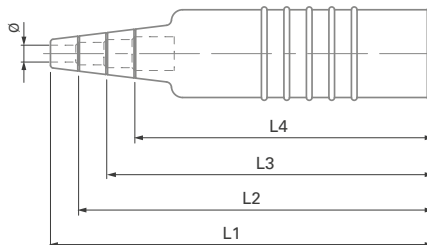PROTECTIVE SLEEVES - 103, 1031, 104, 105, 106 & 107 SIZE**For S, SC and SOV**

Size	Cable Ø range	Length	Part number
103	3.0 - 4.1	L1 = 68	103.861
	4.2 - 5.1	L2 = 63	
	5.2 - 6.1	L3 = 58	
	6.2 - 6.5	L4 = 53	
1031	3.0 - 4.1	L1 = 69	1031.855
	4.2 - 5.1	L2 = 64	
	5.2 - 6.1	L3 = 59	
	6.2 - 6.5	L4 = 54	

Material: TPE (Thermoplastic elastomer).

Size	Cable Ø range	Length	Part number
104	4.0 - 5.1	L1 = 83	104.861
	5.2 - 6.1	L2 = 76	
	6.2 - 7.1	L3 = 70	
	7.2 - 8.5	L4 = 63	
105	3.5 - 5.6	L1 = 104	105.1545
	5.7 - 7.6	L2 = 96	
	7.7 - 8.6	L3 = 88	
	8.7 - 10.5	L4 = 80	

Size	Cable Ø range	Length	Part number
106	6.0 - 10.4	L1 = 123	106.226
	10.5 - 13.4	L2 = 112	
	13.5 - 16.4	L3 = 102	
	16.5 - 19.0	L4 = 92	
107	7.0 - 10.4	L1 = 170	107.808
	10.5 - 13.4	L2 = 160	
	13.5 - 16.4	L3 = 150	
	16.5 - 19.4	L4 = 140	
	19.5 - 22.5	L4 = 130	

For K and KE

Size	Cable Ø range	Length	Part number
103	3.0 - 4.1	L1 = 60	103.886
	4.2 - 5.1	L2 = 55	
	5.2 - 6.1	L3 = 50	
	6.2 - 6.5	L4 = 45	
1031	3.0 - 4.1	L1 = 61	1031.860
	4.2 - 5.1	L2 = 56	
	5.2 - 6.1	L3 = 51	
	6.2 - 6.5	L4 = 46	

Material: TPE (Thermoplastic elastomer).

These protective sleeves for straight cable plugs and cable receptacles have grooved cable bend reliefs which can be shortened according to cable diameters. The lengths of the sleeves and the corresponding cable diameters are listed above.

Size	Cable Ø range	Length	Part number
104	4.0 - 5.1	L1 = 68	104.862
	5.2 - 6.1	L2 = 61	
	6.2 - 7.1	L3 = 55	
	7.2 - 8.5	L4 = 48	
105	3.5 - 5.6	L1 = 88	105.1546
	5.7 - 7.6	L2 = 80	
	7.7 - 8.6	L3 = 72	
	8.7 - 10.5	L4 = 64	

Size	Cable Ø range	Length	Part number
106	6.0 - 10.4	L1 = 110	106.405
	10.5 - 13.4	L2 = 99	
	13.5 - 16.4	L3 = 89	
	16.5 - 19.0	L4 = 79	
107	7.0 - 10.4	L1 = 146	107.809
	10.5 - 13.4	L2 = 136	
	13.5 - 16.4	L3 = 126	
	16.5 - 19.4	L4 = 116	
	19.5 - 22.5	L5 = 106	


SOFT CAPS LANYARD WITH POLYESTER CORD

FOR PLUGS



Accessories	Description	Part number
	Crimp ferrule	300.637
	Crimp lug	300.299
	Heat shrink tube	300.930

Crimp ferrule, crimp lug and heat shrink tube have to be ordered separately.

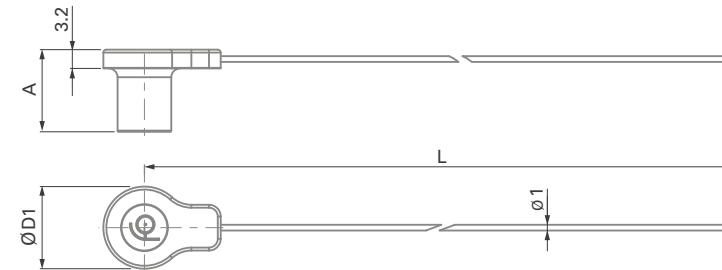

Size	A	D1	L	Part number
102	14.0	14	200	102.2180
103	14.7	17	200	103.2405
1031	14.0	18	200	1031.1432
104	16.0	20	200	104.2807
105	19.0	23	200	105.3264

Material: cap: Santoprene™ TPV 101-80 / Cord: Polyester.


FOR RECEPTACLES



Accessories	Description	Part number
	Crimp ferrule	300.637
	Crimp lug	300.299
	Heat shrink tube	300.930

Crimp ferrule, crimp lug and heat shrink tube have to be ordered separately.

To attach the crimp ferrule or the crimp lug to the polyester cord, use a crimp tool, a vice or a pair of pliers with parallel jaws. There are no specific Fischer Connectors tools.

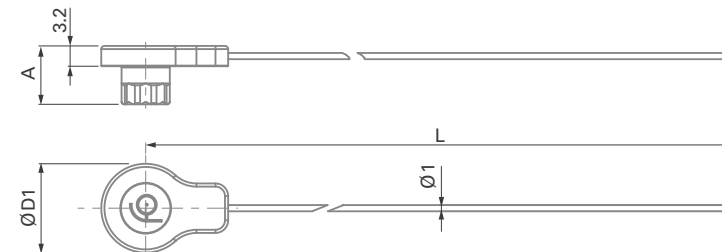

Size	A	D1	L	Part number
102	9.2	14	200	102.2181
103	9.7	17	200	103.2406
1031	9.5	18	200	1031.1433
104	10.0	20	200	104.2808
105	10.0	23	200	105.3265

All dimensions and images shown are in millimeters and are for reference only.


SOFT CAPS - ONE-PIECE

FOR PLUGS



Size	A	D1	L	Part number
102	14.0	14	122	102.2169
103	14.7	17	147	103.2399
1031	14.0	18	148	1031.1425
104	16.0	20	164	104.2766
105	19.0	23	186	105.3253


Material: cap: Santoprene™ TPV 101-80.

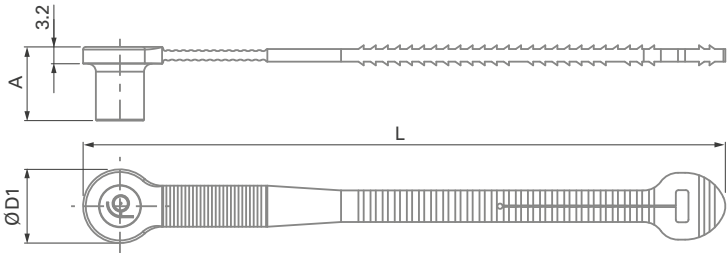

FOR RECEPTACLES



Size	A	D1	L	Part number
102	9.2	14	122	102.2166
103	9.7	17	147	103.2396
1031	9.5	18	148	1031.1422
104	10.0	20	164	104.2763
105	10.0	23	186	105.3250

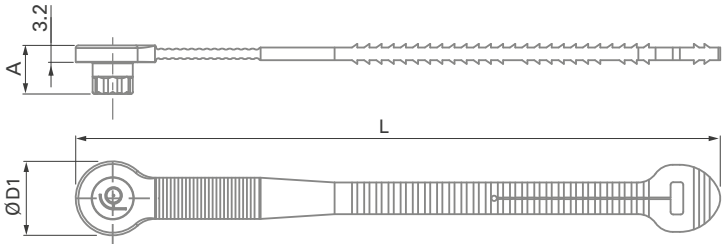


SOFT CAPS - LANYARD WITH STAINLESS STEEL CABLE**FOR PLUGS**

Size	A	D1	L	Part number
102	14.0	14	200	102.2185
103	14.7	17	200	103.2404
1031	14.0	18	200	1031.1431
104	16.0	20	200	104.2806
105	19.0	23	200	105.3263

Crimp ferrule (300.922) and heat shrink tube (300.930) are included.


Material: cap: Santoprene™ TPV 101-80 / Cable: Stainless steel with FEP-Teflon® covering.

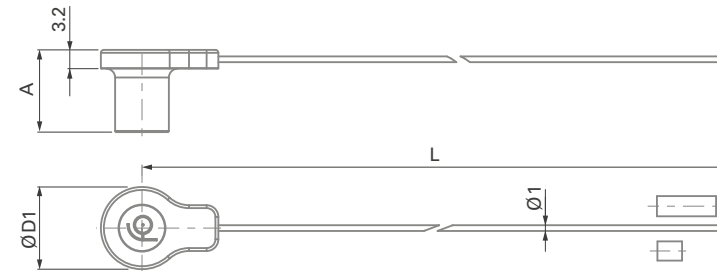**FOR RECEPTACLES**

Size	A	D1	L	Part number
102	9.2	14	200	102.2167
103	9.7	17	200	103.2397
1031	9.5	18	200	1031.1423
104	10.0	20	200	104.2764
105	10.0	23	200	105.3251

Crimp ferrule (300.922), crimp lug (300.299) and heat shrink tube (300.930) are included.


To attach the crimp ferrule or the crimp lug to the stainless steel cable, use a crimp tool, a vice or a pair of pliers with parallel jaws. See page B6-22 for recommended crimping tool for ferrule.

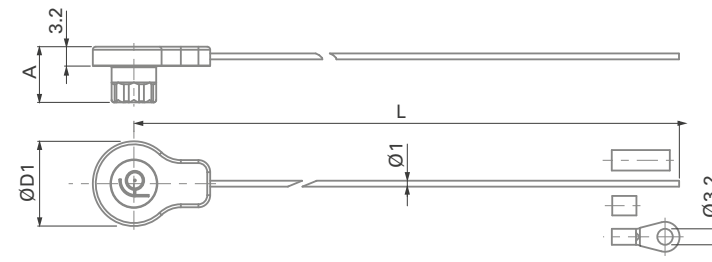

All dimensions and images shown are in millimeters and are for reference only.

SOFT CAPS - LANYARD WITH STAINLESS STEEL CABLE (PRE-ASSEMBLED)

FOR RECEPTACLES

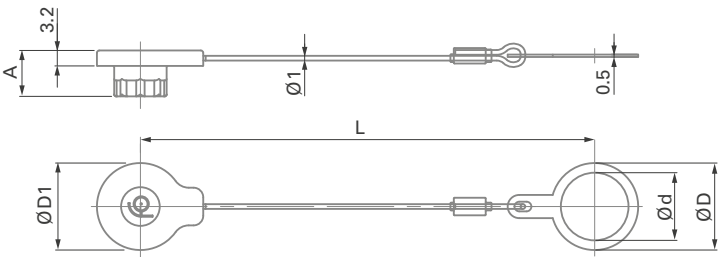


Size	A	D1	L	d	D	Part number
102	9.2	14	86	9	13	102.2182
	9.2	14	86	10	14	102.2165
103	9.7	17	93	14	18	103.2394
1031	9.5	18	94	14	18	1031.1434
	9.5	18	94	15	20	1031.1420
104	10.0	20	98	16	21	104.2761
105	10.0	23	100	20	25	105.3248

Crimp ferrule, heat shrink tube and fixing lug are included and mounted.

Material
Cap: Santoprene™ TPV 101-80
Cable: Stainless steel with FEP-Teflon® covering
Fixing lug: Anthracite plated brass (ISO CuZn37)



Caps are intermateable to provide additional dust protection.

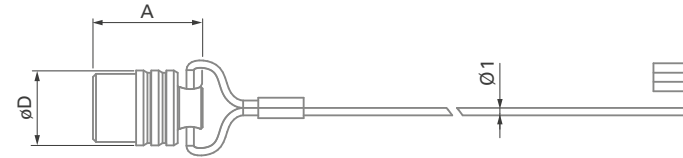METAL CAPS**FOR PLUGS³⁾**

Size	Part number		O-ring material	Caps		Stainless steel cable		Crimp ferrule
	Natural chrome ¹⁾	Anthracite ²⁾		A	D	Length	Covering material	Part number
102	102.1948	102.1953	FPM - Viton®	14.5	10	100	FEP - Teflon®	300.922
103	103.2274	103.2278		21.0	14	100		
1031	1031.825	1031.829		20.0	15	100		
104	104.715	104.722		21.0	15	150		
105	105.3002	105.3007		29.0	20	150		
106	106.813	106.816		37.0	33	250		
107	107.2312	107.2315		42.0	38	300		

Material: cap: natural or anthracite plated brass (ISO CuZn39Pb3) – Crimp ferrule: aluminium.


These metal caps are fitted with an O-ring seal. They protect and seal the mating face of the plugs and receptacles.

To attach the crimp ferrule or the crimp lug to the stainless steel cable, use a crimp tool, a vice or a pair of pliers with parallel jaws. See page B6-22 for recommended crimping tool for ferrule.

¹⁾ Assembled with natural plastic covered stainless steel cable.

²⁾ Assembled with black plastic covered stainless steel cable.


³⁾ Not recommended for SFU; SFE; SFPE; SFPU. Use a soft cap instead.

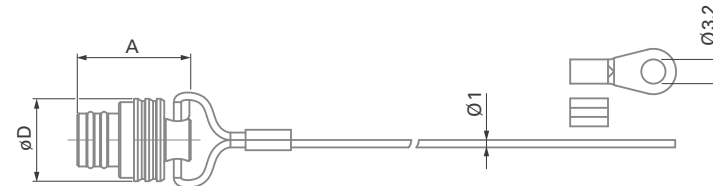FOR RECEPTACLES

Size	Part number		O-ring material	Caps		Stainless steel cable		Crimp ferrule	Crimp lug
	Natural chrome ¹⁾	Anthracite ²⁾		A	D	Length	Covering material	Part number	Part number
102	102.1947	102.1954	NBR	15.0	11	100	FEP - Teflon®	300.922	300.299
103	103.2273	103.2279		15.0	13	100			
1031	1031.824	1031.843		17.0	15	100			
104	104.714	104.723		17.5	16	150			
105	105.3001	105.3008		21.0	19	150			
106	106.812	106.817		24.0	31	250			
107	107.2311	107.2318		26.0	36	300			


Material: cap: natural or anthracite plated brass (ISO CuZn39Pb3) – Crimp ferrule: aluminium – Crimp lug: tin plated copper.

All dimensions and images shown are in millimeters and are for reference only.

SPACERS**FOR WDE**

Size	E	L	Part number
106	0.5 - 8.5	30.0	106.560
	8.0 - 16.0	22.5	106.561
	15.5 - 23.5	15.0	106.562
	23.0 - 31.0	7.5	106.563
107	2.0 - 5.5	18.5	107.556
	5.0 - 8.5	15.5	107.557
	8.0 - 11.5	12.5	107.558
	11.0 - 14.5	9.5	107.559
	14.0 - 17.5	6.5	107.560
	17.0 - 20.5	3.5	107.561

Material: aluminium.

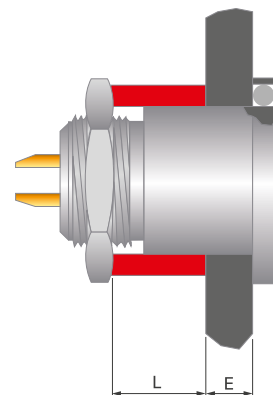FOR DEE, DEU & DKE ¹⁾

Size	E	L	Part number
102	0.5 - 3.0	8.5	102.550
	2.5 - 5.5	6.0	102.551
	5.0 - 8.0	3.5	102.552

Size	E	L	Part number
104	0.5 - 3.0	8.5	104.550
	2.5 - 5.5	6.0	104.551
	5.0 - 8.0	3.5	104.552

Size	E	L	Part number
106	0.5 - 5.5	19.0	106.550
	5.0 - 10.0	14.5	106.551
	9.5 - 14.5	10.0	106.552
	14.0 - 19.0	5.5	106.553


Material: aluminium.

Size	E	L	Part number
103 1031	0.5 - 3.0	8.5	103.550
	2.5 - 5.5	6.0	103.551
	5.0 - 8.0	3.5	103.552

Size	E	L	Part number
105	0.5 - 5.0	12.0	105.1121
	3.5 - 8.5	8.5	105.1122
	7.0 - 12.0	5.0	105.1123

Size	E	L	Part number
107	1.0 - 4.0	18.5	107.556
	4.0 - 7.0	15.5	107.557
	7.0 - 10.0	12.5	107.558
	10.0 - 13.0	9.5	107.559
	13.0 - 16.0	6.5	107.560
	16.0 - 19.0	3.5	107.561


¹⁾ Spacers are useful and available for DKE only in 102 and 103 Sizes.

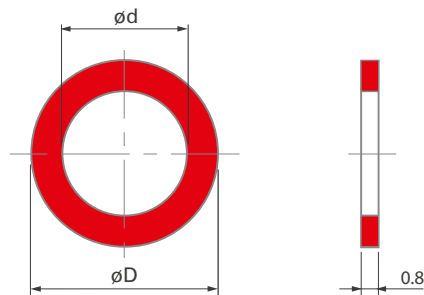WASHERS**COLOR CODING**
WASHERS**FOR D, DB, DBP, DBPC, DG, DGP, DK & SF**

Size	D	d	Color						
			White	Black	Green	Blue	Yellow	Red	Grey
102	14.5	9	102.681	102.682	102.683	102.684	102.685	102.686	102.687
103	18.0	12	103.781	103.782	103.783	103.784	103.785	103.786	103.787
1031	20.0	14	1031.781	1031.782	1031.783	1031.784	1031.785	1031.786	1031.787
104 ¹⁾	23.0	15	104.981	104.982	104.983	104.984	104.985	104.986	104.987
105 ²⁾	26.0	18	105.2281	105.2282	105.2283	105.2284	105.2285	105.2286	105.2287

¹⁾ The connector style DB 104 requires an inner diameter $d = 16$ mm²⁾ The connector style SF 105 requires an inner diameter $d = 16$ mm

Material: PP (Polypropylene).

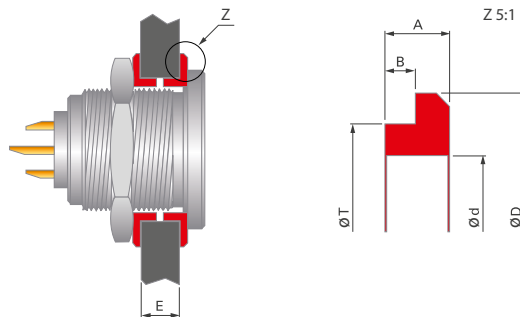INSULATING COLOR CODING
WASHERS**FOR D RECEPTACLES**

Size	D	d	T	A	B	E min/max	Color						
							White	Black	Green	Blue	Yellow	Red	Grey
102	12	9	10.6	1.5	0.6	1.3/6.5	102.791	102.792	102.793	102.794	102.795	102.796	102.797
103	15	12	13.9	2.0	1.0	2.1/5.0	103.382	103.383	-	-	-	-	-
104	19	15	17.0	2.0	1.0	2.1/8.5	-	104.377	-	-	-	-	-

Material:


102 Size: ABS (Acrylonitrile butadiene styrene).

103 and 104 Sizes: POM (Polyoxymethylene) Delrin®

WASHERS

GROUNDING
WASHERS

FOR PANEL CONNECTORS

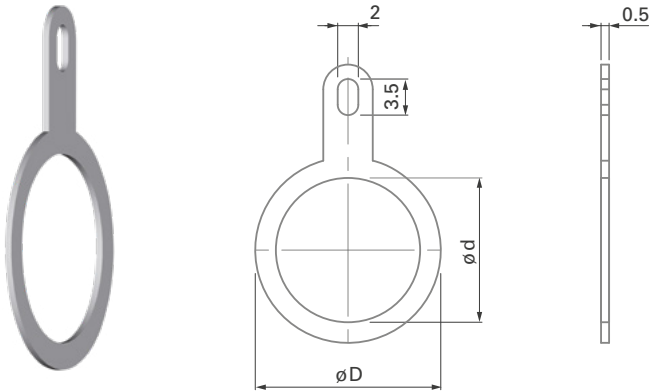


Size	D	d	Part number
102	13	9	102.680
	14	10	102.679
103	16	12	103.385
1031	18	14	1031.315
	20	15	104.680
104	21	16	104.679
105	23	18	105.680
	25	20	105.679

Material: nickel plated brass (ISO CuZn37).

LOCKING
WASHERS

FOR PANEL CONNECTORS

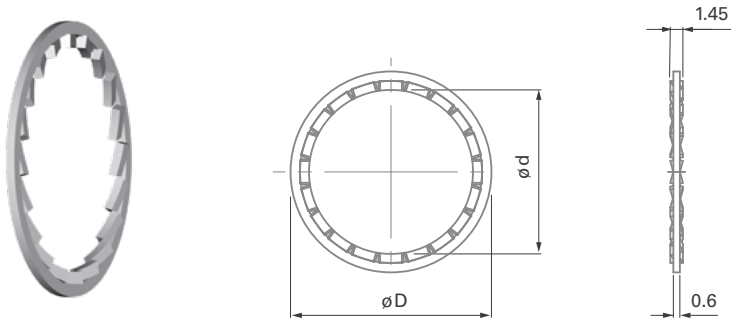

D	d	Part number
12.0	9	300.874
15.0	12	300.875
17.5	14	300.876
18.5	15	300.877

Material: nickel plated brass (ISO CuZn37).

D	d	Part number
20	16	300.878
23	18	300.879
26	20	300.880
33	25	1052.338

SPANNERS & NUT DRIVER**DOUBLE-END OPEN SPANNERS**
EXTRA THIN 

Part number	Opening across flats	Length	Fork thickness
TX00.007	7	90	2.0
TX00.008	8	96	2.3
TX00.009	9	102	2.5
TX00.010	10	104	2.5
TX00.011	11	114	2.5
TX00.012	12	122	3.0
TX00.013	13	122	3.0
TX00.014	14	130	3.0

Material: chrome alloy steel, chrome plated, fork angles – 15° and 75°.

OPEN-END SPANNERS
EXTRA THIN 

Part number	Opening across flats	Length	Fork thickness
TX00.015	15	145	5.2
TX00.016	16	160	3.2
TX00.017	17	160	5.5
TX00.019	19	175	6.0
TX00.020	20	175	6.0
TX00.022	22	196	6.5
TX00.024	24	195	6.5
TX00.025	25	216	7.0
TX00.030	30	240	7.5
TX00.032	32	270	8.0

Material: chrome vanadium steel, chrome plated, fork angle – 15°.

SPANNERS & NUT DRIVER

HOOK SPANNERS

FOR SIDE SLOTTED NUTS




Part number	Thread size	Nut outer dia.
TX00.106	M30x1 / M32x1	34 – 38
TX00.107	M35x1 / M36x1	39 – 43

Material: hardened tool steel, gunmetal finish.

NUT DRIVER WITH T-HANDLE
AND HEX DRIVE

FOR DECORATIVE SLOTTED NUTS

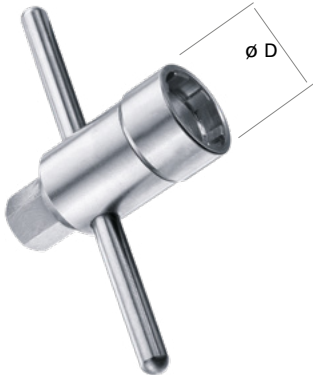

Part number	Thread size	Nut outer dia.	D	Hex drive
TC00.000	M9 x 0.5	12	15	7
TC00.007	M10 x 0.5	13	16	7
TF00.001	M12 x 1	15	18	10
TG00.001	M14 x 1	18	21	10
TK00.000	M15 x 1	19	22	12
TK00.002	M16 x 1	20	23	12
TP00.011	M18 x 1	23	26	12
TP00.005	M20 x 1	25	28	12

Material: hardened tool steel, nickel plated.

CRIMPING TOOLS**CRIMP TOOL**
ULTRA PRECISION**FOR CLOSED C CRIMP TERMINATION**

Part number	Contact dia.	Crimp tool
TX00.240	0.5	BALMAR 18 - 000 or DANIELS MH - 800
	0.7	
	0.9	
	1.3	
TX00.242	1.6	ASTRO TOOL 615708

The best choice of precision crimp tools for highly reliable eight indenter crimping per US-MIL, IEC and DIN specifications.

Positioners have to be ordered according to contact.

Standards

IEC 60203/DIN 41 611, Part 3/MIL-C-22520, Class I, Type 1

FISCHER
POSITIONER**SUITABLE FOR CRIMP TOOL TX00.240****SUITABLE FOR CRIMP TOOL TX00.242**

For the choice of Fischer Connectors' positioner, please refer to page B2-26.

CRIMPING TOOLS

CRIMP TOOL


FOR COAXIAL CABLE



Part number	Description
TX00.241	The crimp tool for coaxial cable features a system of interchangeable dies (see below) that accommodate coaxial connectors and contacts used by Fischer Connectors.

CRIMPING DIES
FOR PRECISION CRIMP TOOL

SUITABLE FOR CRIMP TOOL TX00.241



	Part number	Description
	TX00.250	Special crimping dies for coaxial cables of cable group 1 (RG-174 etc.). The hexagon corresponds to IEC 60803-B.
	TX00.251	Special crimping dies for coaxial cables of cable group 4 (RG-58 etc.). The hexagon corresponds to IEC 60803-D.
	TX00.265	Special crimping dies for crimp ferrule 300.922 of sealing caps

See page B3-23 for the table of cable designation.

FOR CRIMP AND HIGH VOLTAGE CONTACTS**CONTACT
INSERTION TOOL**

Part number	Contact dia.	Description
TX00.214	0.5	Tool for inserting male and female removable crimp contacts into the contact block. Especially recommended for small gauge and fragile wires.
TX00.210	0.7	
TX00.211	0.9	
TX00.273	1.3	

Material:

Handle: black POM (Delrin®).

Fork: tool steel, chrome plated.

**CONTACT
EXTRACTION TOOL**

Part number	Contact dia.	Description
TX00.213	0.5	Tool for extracting male and female removable crimp contacts from the contact block. The sleeve of this tool is pushed over the contact, to release the contact retaining mechanism. The tool plunger is then pushed to eject the contact.
TX00.200	0.7	
TX00.205	0.9	
TX00.212	1.3	
TX00.201	1.6	

Material:

Housing and plunger: black POM (Delrin®).

Sleeve: stainless steel.

Slide: tool steel.

FOR CRIMP AND HIGH VOLTAGE CONTACTS**ASSEMBLY TOOL****FOR MALE CONTACTS WITH OUTSIDE THREAD**

Part number	Description
TP00.001	Tool for special contacts which are inserted only after termination to a wire ¹⁾ . To be used for : - Multipole HV Receptacle 107 A034 - Coax HV Plugs 105 A005 & 105 A108 - Mixed HV Receptacles 105 A020, 105 A036, 105 A060 Receptacles 106 A014

Material – Stainless steel: length 75 mm – Inside thread M3

¹⁾ Warning: these contacts are not removable after insertion into the contact block.

FOR FEMALE CONTACTS WITH INSIDE THREAD

Part number	Description
TP00.000	Tool for special contacts which are inserted only after termination to a wire ¹⁾ . To be used for : - Multipole HV Plug 107 A034 - Coax HV Plugs 105 Z005 (right-angle only) & 105 Z049 Receptacles 105 A049, 105 A108 - Mixed HV Plugs 105 A020, 105 A036, 105 A060 & 106 A014

Material – Stainless steel: length 75 mm – Outside thread M1.7

B7

CHAPTER



FISCHER CORE SERIES STAINLESS STEEL

ULTRA-RESISTANT | STERILIZABLE | EASY TO HANDLE

KEY FEATURES

- IP68 or hermetic
- Nuclear decontamination fluids compatible
- Easy to handle with gloves or remotely



STAINLESS
STEEL

B7-2 / B7-30

STAINLESS STEEL

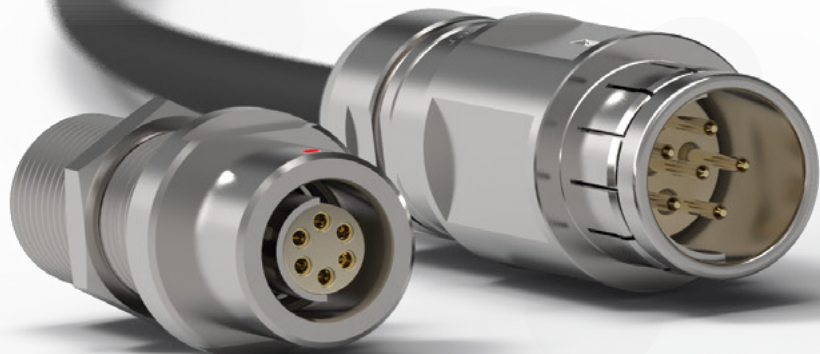


Table of contents

PLUGS



CABLE MOUNTED

- Body styles (ST-S; ST-ST) B 7-4
- Technical dimensions B 7-5

RECEPTACLES



PANEL FRONT MOUNTED

- Body styles (ST-DBEE) B 7-6
- Technical dimensions B 7-7



PANEL REAR MOUNTED

- Body style selection (ST-DBPE) B 7-6
- Technical dimensions B 7-7

FEEDTHROUGH



PANEL FRONT MOUNTED

- Body styles (ST-WDE 103/105/107) B 7-6
- Technical dimensions B 7-8


FOR ALL STAINLESS STEEL

- Size selection B 7-3
- Electrical & contact configurations B 7-10
- Options B 7-17
- Part numbering B 7-18
- Cable clamp sets B 7-20
- Accessories B 7-24
- Tooling B 7-25
- Technical information B 7-28
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

AVAILABLE SIZES

CONNECTOR SIZE
VERSUS
CABLE DIAMETER

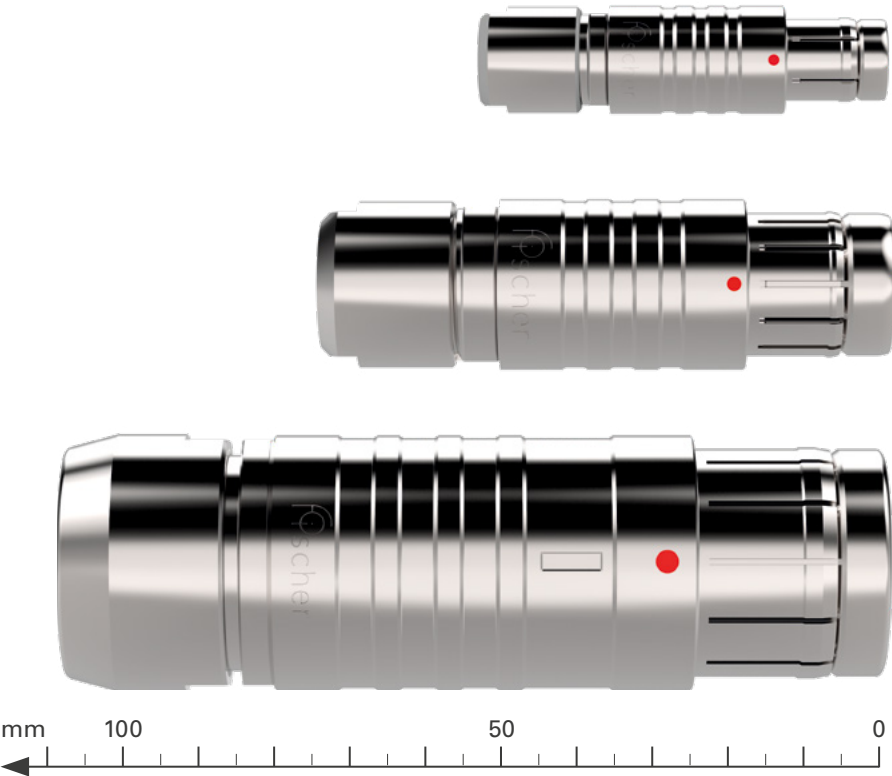

Series	Multipole low voltage		
	Min cable ø	Max cable ø	Number of contacts
103	1.7	6.7 (6.2) ¹⁾	2-12
105	1.5	10.7	2-27
107	5.7	22.7	4-55

¹⁾ For max cable ø, values in parenthesis are valid for sealed connectors (IP68).

STAINLESS
STEEL

PLUGS**CABLE
MOUNTED**


Body style		ST-S	ST-ST	References to detailed information
Protection	Unsealed (IP50)	●	●	Sealing categories, section A-6
	Sealed up to IP68	●	●	
Locking system	Friction			Locking systems, page A-5
	Push-pull	●	●	
	Quick-release			
	Lanyard			
	Tamperproof			
Contacts	Crimp	●	●	Electrical & configurations, page B 7-10
	Solder	●	●	
Housing	Standard	●		Options, page B 7-17
	Remote handling		●	
Design	Shortened body			Body styles, chapter B 7-4
	Straight	●	●	
	Right-angle			
Cabling	Cable clamp sets	●	●	Cable clamp sets, page B 7-20
	Overmoldable			
	Heat shrinkable			
Accessories	Cable bend reliefs			Accessories, pages B 6-10 and B 7-24
	Protective sleeves	●	●	
	Sealing caps	●	●	
Size	103 Series	●		Technical dimensions, page B 7-5 For more information visit our website www.fischerconnectors.com/technical
	105 Series	●		
	107 Series	●	●	

PLUGS

CABLE MOUNTED

ST-S

BODY STYLE

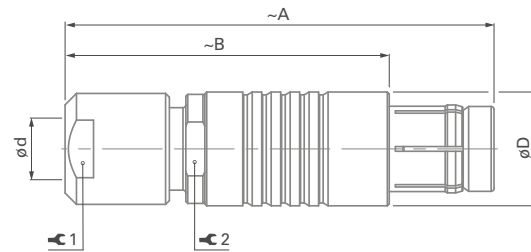


Series	A	B	D	d max		1	Torque 1 [Nm]	2
				Unsealed	Sealed			
103	46	35	12	6.7	6.2	10	1.0	10
105	62	47	18	10.7	10.7	15	3.5	16
107	110	85	34	22.7	22.7	32	10.0	32

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket. Tests must be conducted to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

CABLE MOUNTED

ST-ST

BODY STYLE

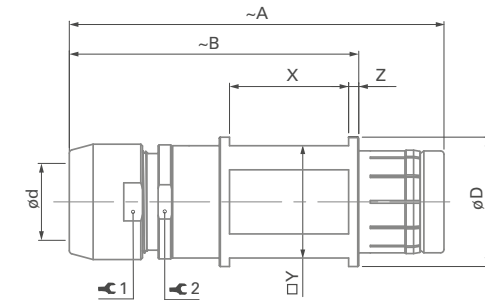

Series	A	B	D	d max		1	Torque 1 [Nm]	2
				Unsealed	Sealed			
107	110	85	38	22.7	22.7	32	10.0	32

Series	X	Y	Z
107	35	33	3

RECEPTACLES**PANEL
MOUNTED**


Body style		ST-DBEE	ST-DBPE	ST-WDE	References to detailed information
Protection	Unsealed (IP50)				Sealing categories, page A-6
	Sealed up to IP68	●	●	●	
	Hermetic	●	●	●	
Contacts	Crimp				Electrical & contact configurations, page B 7-10
	Solder	●	●		
	PCB	●	●		
Housing color	Natural stainless steel	●	●	●	
Design	Right-angle				Body styles, page B7-6
	Flush		●	●	
	Front-projecting	●		●	
	Rear-projecting		●		
	Bulkhead feedthrough			●	
Assembly	Front-mounting	●		●	
	Rear-mounting		●		
Accessories	Sealing caps	●	●	●	Accessories, pages B7-24, B6-16 and B6-18
	Spacers			●	
	Color-coded washers				
	Grounding washers	●	●		
	Locking washers	●	●		
	103 Series	●	●	●	Technical dimensions, page B7-7 For more information visit our website www.fischerconnectors.com/technical
	105 Series	●		●	
	107 Series	●		●	

RECEPTACLES

PANEL FRONT MOUNTED

ST-DBEE


BODY STYLE



Series	A	B max.	C	C1	D	M	1	Torque 1 [Nm]	2
103	23	4.0	13.0	3.0	18	14x1	17	3.0	14
105	32	5.0	19.0	4.0	27	18x1	22	6.0	22
107	47	5.0	24.0	5.0	45	36x2	TX00.107	16	38

PANEL CUT-OUT


Series	d
103	14.1
105	18.1
107	36.2



PANEL REAR MOUNTED

ST-DBPE


BODY STYLE

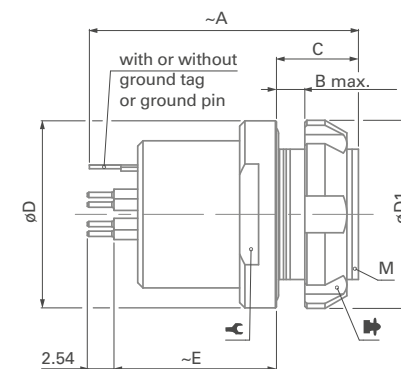

Series	A	B max.	C	D	D1	E	M	1	2	Torque [Nm]
103	26	4.0	7.8	18	18	15.5	14x1	15	TG00.001	3.0

PANEL CUT-OUT

Series	D
103	14.1




FEEDTHROUGH

PANEL FRONT
MOUNTED


ST-WDE 103

BODY STYLE



ST-WDE 105


BODY STYLE

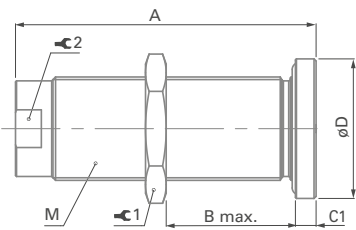

Series	A	B max	C	C1	D	M	⌘ 1 ¹⁾	Torque 1 [Nm]	⌘ 2
103	40	23	14	4	17	12x1	14	2.5	14
105	62	46	-	4	27	20x1	22	6.5	17

PANEL CUT-OUT

Series	d
103	12.1
105	20.1



The bulkhead feedthrough connector allows the passing of electrical signals and power through a panel via two cable plugs.

The "AZ" version of the feedthrough accepts a type "A" plug on the flange side and a type "Z" plug on the threaded end, which is typically oriented toward the interior of the chassis. In the version "ZA" the connections "A" and "Z" are inverted.

Dimension "B max" specifies the maximum panel thickness. For panels thinner than the unthreaded section "E min", we can provide spacers as shown accessories section, page B 6-16.


¹⁾ Assembly tool for side hex nut, see Accessories section, page B 7-25.

FEEDTHROUGH

PANEL FRONT MOUNTED

ST-WDE 107


BODY STYLE



Series	A	B min/max	C1	D	E min	M	 ¹⁾	Torque 1 [Nm]
107	92	20/76	5	45	20	36x2	TX00.107	17

PANEL CUT-OUT

Series	d
107	36.2



The bulkhead feedthrough connector allows the passing of electrical signals and power through a panel via two cable plugs.

The "AZ" version of the feedthrough accepts a type "A" plug on the flange side and a type "Z" plug on the threaded end, which is typically oriented toward the interior of the chassis. In the version "ZA" the connections "A" and "Z" are inverted.

Dimension "B max" specifies the maximum panel thickness. For panels thinner than the unthreaded section "E min", we can provide spacers as shown in accessories section, page B 6-16.

¹⁾ Assembly tool for side slotted nut, see Accessories section, page B 7-25.

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface. Tests must be conducted to evaluate the exact values.

A/Z POLARITY

To protect users from contact with dangerous voltages, most of our connectors exist in two versions:

STANDARD "A" POLARITY

The contacts of the receptacle are protected against accidental touch.

Recommended when voltage is present on the receptacle.

INVERTED "Z" POLARITY

The contacts of the plug are protected against accidental touch.

Recommended when voltage is present on the plug.

	Receptacle ST-DBEE	Plug ST-S/ST-ST
Type "A" Standard Polarity		
Type "Z" Inverted Polarity		


IMPORTANT: AN "A" TYPE CONNECTOR CAN NEVER BE MATED WITH A "Z" TYPE CONNECTOR.

A plug "ST-S" has the same housing in type "A" as in type "Z", but type "A" comes with unprotected contacts while type "Z" is equipped with

touch-protected contacts. In most cases these are female contacts which are recessed in the insulator.

BULKHEAD **FEEDTHROUGH WDE**

Type "AZ" is the standard version of the ST-WDE. The flange side accepts an "A" type plug, and the threaded side accepts a "Z" type plug.

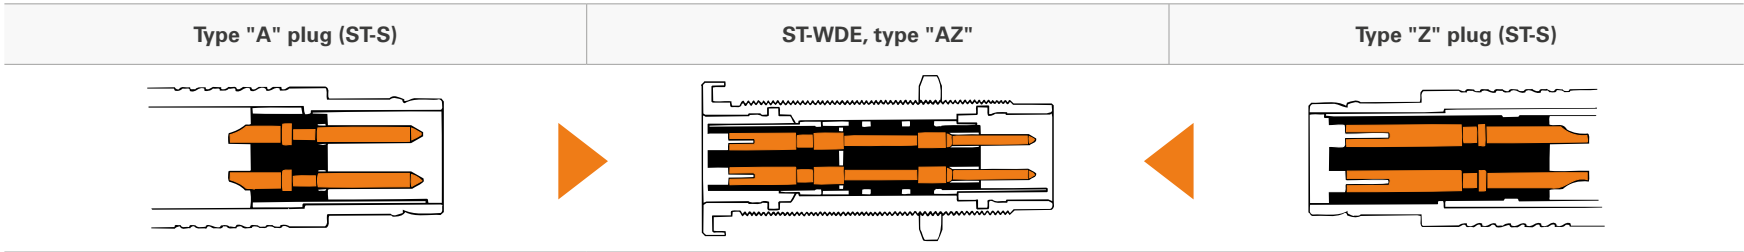

The "ZA" version of the ST-WDE accepts a type "Z" plug at the flange side and accepts a type "A" plug at the threaded end.

CONTACT TYPES

The Fischer Connectors' contact designs are highly reliable and are guaranteed up to 5,000 mating cycles.

All standard brass and bronze contacts for use in the Core Series are screw machined, and all are gold plated over a nickel underplate.

Most connectors are available with solder, crimp or PCB contacts and each type is optimized for a particular application.

SOLDER CONTACTS

Most versatile
Pre-installed contacts
Qualified assemblers required



- Can be produced with any type of contact block material and accept a wide range of wire sizes.
- Contacts are pre-installed in the insulator block, and the wires can be terminated with any appropriately sized soldering iron.
- May require operators who are qualified in specialized soldering techniques.

PCB CONTACTS

PCB or Flex circuit mount
Reduced pin diameter
Wave soldering



- Designed to be mounted directly onto a PCB or flex circuit, can be used in wave soldering operations for faster production assembly.
- Preferred for high rates of data transmission due to the low distance to the board that their integration allows. This helps reducing signal perturbations.
- PCB pins are generally used on rear mounted panel connectors.

CRIMP CONTACTS

Selectively annealed area
Special tools required
Limited range of wire sizes



- Each contact has a selectively annealed area which is deformed during assembly by specialized tooling to assure proper termination of the wire to the contact.
- Commonly used for field termination or repair, as no soldering process is required.
- Not available for sealed or hermetic connectors.

CONTACT TYPES

CRIMP CONTACTS



- Selectively annealed area
- Special tools required
- Limited range of wire sizes
- Each contact has a selectively annealed area which is crushed during assembly by specialized tooling to ensure proper termination of the wire to the contact.
- Commonly used for field termination or repair, as no soldering is required.
- Not available for sealed or hermetic connectors.

TOOLING FOR CRIMP CONTACTS

Series	Polarity	Contact diameter (mm)									
		0.5		0.7		0.9		1.3		1.6	
		Part number		Part number		Part number		Part number		Part number	
		Contact	Positioner	Contact	Positioner	Contact	Positioner	Contact	Positioner	Contact	Positioner
103	Male	200.2113	TX00.300	200.2884	TX00.304	200.2890	TX00.307	200.2402	TX00.311	-	-
	Female	200.2114	TX00.302	200.2885	TX00.305	200.2892	TX00.309	200.2214	TX00.312	-	-
105	Male	-	-	200.2884	TX00.304	200.2891	TX00.308	200.2403	TX00.338	200.1653	TX00.313
	Female	-	-	200.2886	TX00.306	200.2893	TX00.310	200.2214	TX00.312	200.1654	TX00.314
Crimp tool part number		TX00.240		TX00.240		TX00.240		TX00.240		TX00.242	

See following pages for description of crimp tool and positioner.

Please refer to www.fischerconnectors.com/technical for detailed information and assembly instructions.

103 SERIES

● = Standard

Reference	Pin layout	Number of contacts	Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
			Solder	Crimp	PCB			Solder contacts ¹⁾	Crimp contacts	AC r.m.s		DC			
										Contact to body	Contact to contact	Contact to body	Contact to contact		
103 A Z 051		2	●	●	●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm min ø0.58mm AWG18-24	1.5	2.2	2.2	3.0	≤ 250	13
103 A Z 052		3	●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.2	1.5	1.8	2.0	≤ 250	12
103 A Z 053		4	●		●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.2	1.6	2.0	2.4	≤ 250	7.0
103 A Z 054		5	●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.1	1.4	1.9	2.2	≤ 250	6.8
103 A Z 056		6	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.0	1.3	2.0	2.0	≤ 250	5.2
103 A Z 057		7	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.0	1.3	2.0	2.0	≤ 250	5.0
103 A Z 058		8	●		●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	0.8	1.1	1.4	1.9	≤ 200	3.8
103 A Z 062		12	●		●	PEEK	0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	max ø0.43mm min ø0.20mm AWG28-32	0.9	1.2	1.5	1.8	≤ 200	2.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with ST-S plug and ST-D receptacle. Please contact us for rating for ST-WSO right-angle plugs and ST-WDE bulkhead feedthroughs.

105 SERIES

● = Standard

Reference	Pin layout	Number of contacts		Contact types		Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁶⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]	
										AC r.m.s		DC				
				Solder	Crimp			PCB	Solder contact ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body			Contact to contact
105 A Z 051		2		●			PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	2.5	3.0	4.0	4.0	≤ 630	26
105 A Z 087		2		●			PEEK	3.0	max ø3.13mm AWG9 [1] AWG10 [105/30]	–	1.2	1.6	2.3	3.0	≤ 400	30
105 A Z 052		3		●			PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	2.0	2.5	3.0	3.5	≤ 400	23
105 A Z 053		4		●			PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	1.8	1.8	2.6	2.6	≤ 320	20
105 A Z 054 ⁵⁾		7	1	●			PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	3.0	2.0	4.0	3.0	≤ 320	25
			6					1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.8	1.5	2.5	2.0		7.0
105 A Z 067		8		●			PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.7	2.0	2.5	2.8	≤ 320	10
105 A 124		8	2	●			PEEK	2.3	max ø2.48mm AWG11 [1] AWG12 [7/20]	–	1.2	2.2	1.8	3.2	≤ 250	18.5
			6					1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.2	1.2	1.8	1.8		7.5
105 A Z 101 ⁵⁾		9	1	●		●	PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	3.0	2.0	4.0	3.0	≤ 320	25
			8					1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.8	1.5	2.5	2.0		5.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Contact dia. 2.0 is positioned to make contact first and break last.⁶⁾ Measured with S plug and D receptacle.

105 SERIES

● = Standard

Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact ø <i>(mm)</i>	Wire size ²⁾		Test voltage ⁸⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
											AC r.m.s		DC			
				Solder	Crimp	PCB			Solder contacts ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body	Contact to contact		
105 A Z 062		10		●	●	●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm min ø0.58mm AWG18-24	1.7	2.0	2.5	2.7	≤ 320	9.0
105 A Z 069		12		●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	-	1.4	1.5	1.8	2.0	≤ 250	8.0
105 A Z 104 ⁵⁾		13	3	●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	-	2.5	1.5	3.8	2.2	≤ 320	14
			10					0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	-	1.3	1.5	1.8	2.2		1.0
105 A 127 ⁷⁾		13	3		●		PEEK	1.3	-	max ø1.18mm min ø0.58mm AWG18-24	3.0	2.8	4.8	3.9	≤ 320	14
			10					0.7	-	max ø0.62mm min ø0.38mm AWG24-28	3.1	1.1	4.7	1.9		1.0
105 A Z 058		15		●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.4	1.6	1.8	2.2	≤ 250	5.3
105 A Z 110 ⁶⁾		16	4	●		●	PEEK	1.6	max ø1.86mm AWG13 [1] AWG14 [7/22]	-	1.6	1.3	2.8	2.1	≤ 250	14
			12					0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	-	1.0	1.2	1.5	2.0		1.0
105 A Z 038		18		●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.4	1.6	1.8	2.2	≤ 200	4.5
105 A Z 093		24		●		●	PBT	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	-	1.2	1.5	1.5	2.0	≤ 250	3.5
105 A Z 102		27		●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.2	1.5	1.5	2.0	≤ 250	3.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Contacts dia. 1.3 are positioned to make contact first and break last.⁶⁾ Contacts dia. 1.6 are positioned to make contact first and break last.⁷⁾ Inverted polarity: female contacts on plug/male contact on receptacle⁸⁾ Measured with S plug and D receptacle.

107 SERIES

● = Standard ○ = Option


Reference	Pin layout	Number of contacts	Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
			Solder	Crimp	PCB					AC r.m.s		DC			
								Male solder contacts ¹⁾	Female solder contacts ¹⁾	Contact to body	Contact to contact	Contact to body	Contact to contact		
107 A Z 013		4	●			PEEK	2.3	max ø2.93mm AWG9 [1] AWG10 [37/26]	max ø2.28mm AWG12 [1] AWG14 [105/34]	3.6	4.3	5.0	5.6	≤ 1000	26
107 A Z 018		6	●			PEEK	2.3	max ø2.93mm AWG9 [1] AWG10 [37/26]	max ø2.28mm AWG12 [1] AWG14 [105/34]	3.4	3.4	4.3	4.3	≤ 800	25
107 A Z 015		19	●			PEEK	2.0	max ø2.08mm AWG12 [1] AWG14 [7/22]	max ø2.03mm AWG13 [1] AWG14 [7/22]	2.0	2.5	2.5	3.2	≤ 500	13
107 A Z 051		27	●			PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm AWG17 [1] AWG18 [16/30]	2.0	2.0	3.0	3.2	≤ 400	7.5
107 A Z 052		40	●			PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm AWG17 [1] AWG18 [16/30]	1.8	1.5	2.5	2.0	≤ 320	6.5

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with S plug and D receptacle.

MECHANICAL CODING

For easy connect/disconnect operations

Our contact blocks are engineered with arc-shape metal guides, which ensure precise alignment of connectors during the mating process.




This guiding mechanism provides:

- Increased safety and user friendliness by preventing misconnection.
- Easy mating cycles, can be blind-mated.

Keying codes option

All Multipole body styles are mechanically coded.
Code 1 is the standard, but other codes can be requested.

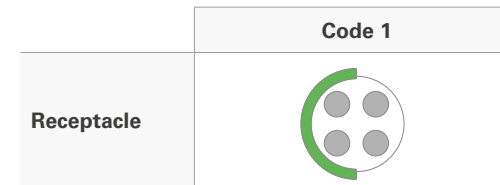

Other keying codes are available on request, please contact us.
Images are for reference only.

MULTIPOLE LOW VOLTAGE OPTIONS

OPTIONS

1	Housing color Which housing color do you need?	Natural Stainless steel	
2	Contact block material Which contact block material do you need?	PEEK	
3	Contact type Which contact type do you need?	Solder	Crimp¹⁾
4	Keying code Which keying code do you need?	Code 1 	-130 -150

¹⁾ Crimp contacts are not an option for sealed or hermetic connectors.

CONTACT TYPE FOR PANEL MOUNTED CONNECTORS

Applicable for	Last digit	Description
Front mounted: ST-DBEE	0	Standard: solder contacts
	9	With PCB (Printed Circuit Board) contacts instead of solder contacts
Rear mounted: ST-DBPE	0	Standard: PCB (Printed Circuit Board) contacts
	9	With solder contacts instead of PCB (Printed Circuit Board) contacts

Options are available on request, please contact us.

ORDERING INFORMATION

How to build a part number

Refer to the table aside to find the information you need to build the part number to order your selected connector.
For customized solutions, please contact us.

CONNECTORS PARTS

Part system	Body style	Size	Polarity
-------------	------------	------	----------

PART NUMBER EXAMPLES

Plug	ST-S	103	A
------	------	-----	---

ST-S cable mounted plug in Series 103 with 6 (multipole) low voltage male contacts and following options.

Receptacle	ST-DBEE	103	A
------------	---------	-----	---

ST-DBEE panel mounted receptacle in Series 103 with 6 (multipole) low voltage female contacts and following options.

▼	▼	▼
Cable mounted plugs ST-S ST-ST	Series 103 105 107 See page B 7-3 or Technical dimensions B 7-5	As standard rule A = male contacts on plug and female contacts on receptacle Z = female contacts on plug and male contacts on receptacle See page B 7-10
Panel mounted receptacles ST-DBEE ST-DBPE ST-WDE		


ORDERING INFORMATION

Contact configuration	Options	Cable clamp sets for cable mounted plugs & receptacles
056	-130	+
	Stainless steel housing, PEEK contact blocks with solder contacts, keying code 1 and clamp nut without bend relief.	
056	-130E	Not applicable as panel mounted
	Stainless steel housing, PEEK contact blocks with solder contacts and keying code 1.	
▼	▼	▼
Three-digit number specific for each pin layout	Specific suffix corresponding to selected options	Below cable clamp sets should be ordered separately
	Housing color	Multipole low voltage
See page B 7-13	Natural Stainless Steel	Example: ST-S 103 A056-130+
	Contact block insulating material	Clamp set ordering line E31 103.1/6.7+B
	PEEK	See page B 7-20
	Contact type	
	Solder Crimp PCB	
	Keying code of the contact block	
	Clamp nut type & color	
	Other options	
	See page B 7-17	

RELATED ITEMS

Accessories	Tooling
	
Ex: ST-CR105C 2C3 A150	Ex: TX00.240
Stainless steel cap	Crimping tool
▼	▼
Protective sleeves Soft caps Metal caps Spacers Washers Mounting nuts	Spanners / Wrenches Crimping tools Tools for crimp contacts and high voltage contacts
See page B 7-24	See page B 7-12

CABLE CLAMP SETS



- To guarantee excellent cable retention and strain relief, Fischer Connectors provides robust and high quality cable clamp sets:
- Collet style clamp system retaining cable over large jacket surface area.
 - Protection of small diameters and delicate conductors.

Cable clamp sets are suitable for all cable mounted connectors.

RANGE OVERVIEW: S, U & E CABLE CLAMP SETS

Fischer Connectors offers three types of cable clamps sets. The table below will help you select the one corresponding to your needs.

Cable clamp set	Do you need the interface between the cable and the connector to be sealed?		Do you need the connector to be terminated to the cable shield?	
	Unsealed	Sealed	Unshielded	Shielded
S - Shielded	●			●
U - Unshielded	●		●	
E - Environmental		●	●	●

For 107 Series connectors, only S and E cable clamp sets are available.


PART NUMBERING

Cable clamp sets below should be ordered separately
Multipole low voltage
ST-S 103 A056-130+
Examples connector ordering line
ST-S 103 A056-130+
Clamp set ordering line
E3 102.5/2.0

See following pages for cable clamp sets selection.

103 SERIES**S**
SHIELDED

Shielded cable clamp with spacer and sleeve.

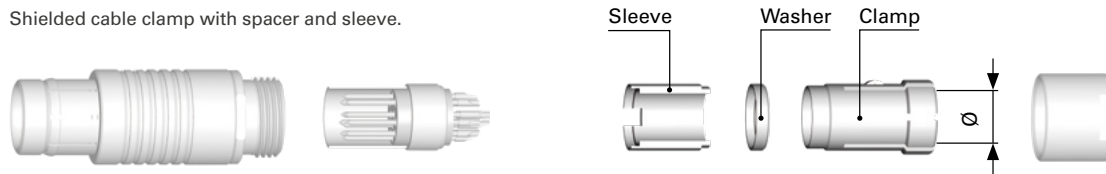

Cable dia. range	Collet Ø	Cable clamp set
1.7 - 2.2	2.2	E31 103.1/2.2 + B
2.2 - 2.7	2.7	E31 103.1/2.7 + B
2.7 - 3.2	3.2	E31 103.1/3.2 + B
3.2 - 3.7	3.7	E31 103.1/3.7 + B
3.7 - 4.2	4.2	E31 103.1/4.2 + B
4.2 - 4.7	4.7	E31 103.1/4.7 + B
4.7 - 5.2	5.2	E31 103.1/5.2 + B
5.2 - 5.7	5.7	E31 103.1/5.7 + B
5.7 - 6.2	6.2	E31 103.1/6.2 + B
6.2 - 6.7	6.7	E31 103.1/6.7 + B

U
UNSHIELDED


Unshielded, one-piece cable clamp.



Cable dia. range	Collet Ø	Cable clamp set
2.2 - 3.2	3.2	E3 103.6/3.2
3.2 - 4.2	4.2	E3 103.6/4.2
4.2 - 4.7	4.7	E3 103.6/4.7
4.7 - 5.2	5.2	E3 103.6/5.2
5.2 - 5.7	5.7	E3 103.6/5.7
5.7 - 6.2	6.2	E3 103.6/6.2
6.2 - 6.7	6.7	E3 103.6/6.7

E
ENVIRONMENTAL


Environmentally sealed clamp for use with shielded or unshielded cables.

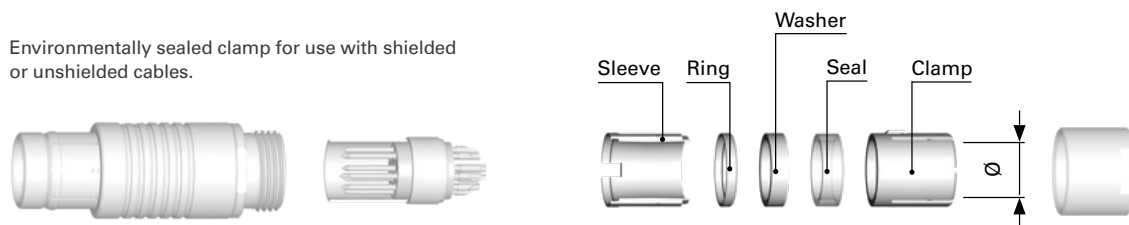

Cable dia. range	Collet Ø	Cable clamp set
1.7 - 2.2	2.2	E31 103.2/2.2 + B
2.2 - 2.7	2.7	E31 103.2/2.7 + B
2.7 - 3.2	3.2	E31 103.2/3.2 + B
3.2 - 3.7	3.7	E31 103.2/3.7 + B
3.7 - 4.2	4.2	E31 103.2/4.2 + B
4.2 - 4.7	4.7	E31 103.2/4.7 + B
4.7 - 5.2	5.2	E31 103.2/5.2 + B
5.2 - 5.7	5.7	E31 103.2/5.7 + B
5.7 - 6.2	6.2	E31 103.2/6.2 + B

105 SERIES**S**
SHIELDED

Shielded cable clamp with spacer and sleeve.

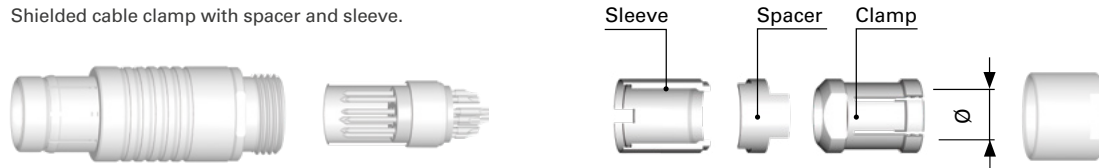

Cable dia. range	Collet Ø	Cable clamp set
3.2 - 4.2	4.2	E3 105.1/4.2 + B
4.2 - 5.2	5.2	E3 105.1/5.2 + B
5.2 - 6.2	6.2	E3 105.1/6.2 + B
6.2 - 7.2	7.2	E3 105.1/7.2 + B
7.2 - 8.2	8.2	E3 105.1/8.2 + B
8.2 - 9.2	9.2	E3 105.1/9.2 + B
9.2 - 10.0	10.0	E3 105.1/10.0 + B
10.0 - 10.7	10.7	E3 105.1/10.7 + B

U
UNSHIELDED


Unshielded, one-piece cable clamp.



Cable dia. range	Collet Ø	Cable clamp set
2.5 - 3.5	3.5	E3 105.6/3.5
3.5 - 4.5	4.5	E3 105.6/4.5
4.5 - 5.5	5.5	E3 105.6/5.5
5.5 - 6.5	6.5	E3 105.6/6.5
6.5 - 7.5	7.5	E3 105.6/7.5
7.5 - 8.5	8.5	E3 105.6/8.5
8.5 - 9.5	9.5	E3 105.6/9.5
9.5 - 10.5	10.5	E3 105.6/10.5

E
ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.

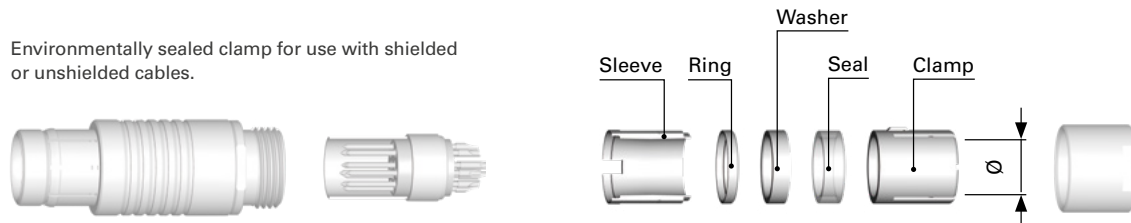


Cable dia. range	Collet Ø	Cable clamp set
3.2 - 4.2	4.2	E31 105.2/4.2 + B
4.2 - 5.2	5.2	E31 105.2/5.2 + B
5.2 - 6.2	6.2	E31 105.2/6.2 + B
6.2 - 7.2	7.2	E31 105.2/7.2 + B
7.2 - 8.2	8.2	E31 105.2/8.2 + B
8.2 - 9.2	9.2	E31 105.2/9.2 + B
9.2 - 10.0	10.0	E31 105.2/10.0 + B
10.0 - 10.7	10.7	E31 105.2/10.7 + B

107 SERIES

S SHIELDED

Shielded cable clamp with spacer and sleeve.

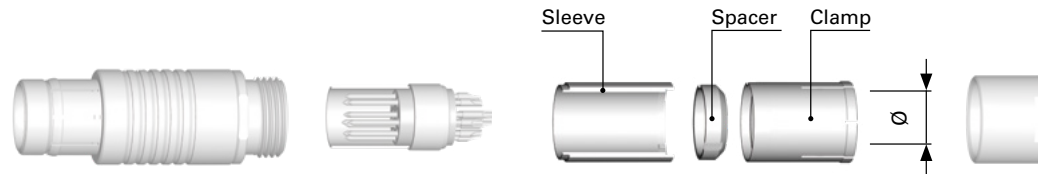


Cable dia. range	Collet Ø	Cable clamp set
5.7 - 7.2	7.2	E3 107.1/7.2
7.2 - 8.2	8.2	E3 107.1/8.2
8.2 - 9.2	9.2	E3 107.1/9.2
9.2 - 10.2	10.2	E3 107.1/10.2
10.2 - 11.2	11.2	E3 107.1/11.2

Cable dia. range	Collet Ø	Cable clamp set
11.2 - 12.2	12.2	E3 107.1/12.2
12.2 - 13.2	13.2	E3 107.1/13.2
13.2 - 14.2	14.2	E3 107.1/14.2
14.2 - 15.2	15.2	E3 107.1/15.2
15.2 - 16.2	16.2	E3 107.1/16.2

Cable dia. range	Collet Ø	Cable clamp set
16.2 - 17.2	17.2	E3 107.1/17.2
17.2 - 18.2	18.2	E3 107.1/18.2
18.2 - 19.2	19.2	E3 107.1/19.2
19.2 - 20.2	20.2	E3 107.1/20.2
20.2 - 21.2	21.2	E3 107.1/21.2
21.2 - 22.7	22.7	E3 107.1/22.7

E ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.

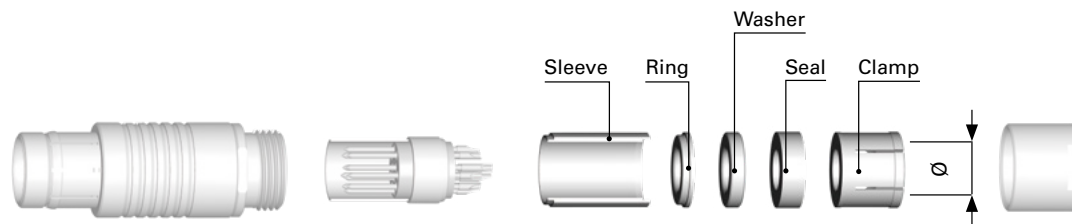


Cable dia. range	Collet Ø	Cable clamp set
5.7 - 7.2	7.2	E3 107.2/7.2
7.2 - 8.2	8.2	E3 107.2/8.2
8.2 - 9.2	9.2	E3 107.2/9.2
9.2 - 10.2	10.2	E3 107.2/10.2
10.2 - 11.2	11.2	E3 107.2/11.2

Cable dia. range	Collet Ø	Cable clamp set
11.2 - 12.2	12.2	E3 107.2/12.2
12.2 - 13.2	13.2	E3 107.2/13.2
13.2 - 14.2	14.2	E3 107.2/14.2
14.2 - 15.2	15.2	E3 107.2/15.2
15.2 - 16.2	16.2	E3 107.2/16.2

Cable dia. range	Collet Ø	Cable clamp set
16.2 - 17.2	17.2	E3 107.2/17.2
17.2 - 18.2	18.2	E3 107.2/18.2
18.2 - 19.2	19.2	E3 107.2/19.2
19.2 - 20.2	20.2	E3 107.2/20.2
20.2 - 21.2	21.2	E3 107.2/21.2
21.2 - 22.7	22.7	E3 107.2/22.7

STAINLESS STEEL CAPS


FOR PLUGS

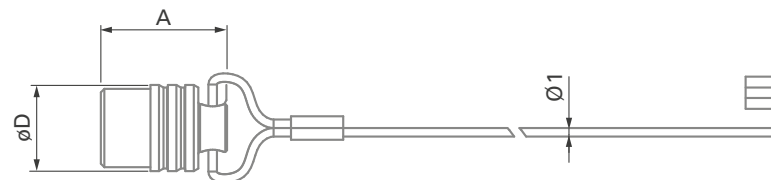

Series	Part number	O-ring material	Caps		Stainless steel cable		Crimp ferrule
			A	D	Length	Covering material	Part number
103	ST-CP103C 2C3 A100	EPDM	21	13	100	FEP - Teflon®	300.922
105	ST-CP105C 2C3 A150		29	20	150		
107	ST-CP107C 2C3 A350		47	40	350		

Material- Cap: Stainless steel 316L – Crimp ferrule: aluminium

FOR RECEPTACLES

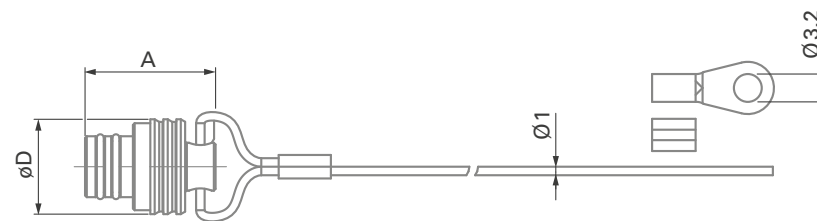

Series	Part number	O-ring material	Caps		Stainless steel cable		Crimp ferrule	Crimp lug
			A	D	Length	Covering material	Part number	Part number
103	ST-CR103C 2C3 E100	EPDM	13	15	100	FEP - Teflon®	300.922	300.299
105	ST-CR105C 2C3 E150		21	19	150			
107	ST-CR107C 2C3 E350		26	36	350			

Material- Cap: Stainless steel 316L – Crimp ferrule: aluminium

They protect and seal the mating face of the plugs and receptacles.

To attach the crimp ferrule or the crimp lug to the stainless steel cable, use a crimp tool, a vice or a pair of pliers with parallel jaws. See page B6-22 for recommended.

Other available accessories listed on page B7-30. Cable strain relief, Protective Boots, sealing caps)Plastic, Soft caps).

SPANNERS & NUTDRIVER**DOUBLE-END OPEN SPANNER**
EXTRA THIN 

Part number	Opening across flats	Length	Fork thickness
TX00.010	10	104	2.5
TX00.014	14	130	3.0

Material – Chrome alloy steel, chrome plated, fork angles – 15° and 75°

OPEN-END SPANNER
EXTRA THIN 

Part number	Opening across flats	Length	Fork thickness
TX00.015	15	145	5.2
TX00.016	16	160	3.2
TX00.017	17	160	5.5
TX00.022	22	196	6.5
TX00.032	32	270	8.0

Material – Chrome vanadium steel, chrome plated, fork angle – 15°

HOOK SPANNER
FOR SIDE SLOTTED NUTS 

Part number	Thread size	Nut outer dia.
TX00.107	M35x1 / M36x1	39 – 43

Material – Hardened tool steel, gunmetal finish

NUT DRIVER WITH T-HANDLE
AND HEX DRIVE **FOR DECORATIVE SLOTTED NUTS** 

Part number	Thread size	Nut outer dia.	D	Hex drive
TG00.001	M14 x 1	18	21	10

Material – Hardened tool steel, nickel plated

All dimensions and images shown are in millimeters and are for reference only.

CRIMPING TOOLS

CRIMP TOOL ULTRA PRECISION

FOR CLOSED CRIMP TERMINATION



Part number	Contact dia.	Crimp tool
TX00.240	0.5	BALMAR 18 - 000 or DANIELS MH - 800
	0.7	
	0.9	
	1.3	
TX00.242	1.6	ASTRO TOOL 615708

The best choice of precision crimp tools for highly reliable eight indenter crimping per US-MIL, IEC and DIN Specifications. Positioners have to be ordered according to contact.

Standards

IEC 60203 / DIN 41 611, Part 3 / MIL-C-22520, Class I, Type 1

POSITIONER

SUITABLE FOR CRIMP TOOL TX00.240



SUITABLE FOR CRIMP TOOL TX00.242



For the choice of Fischer Connectors' positioner, please refer to section "Tooling", page B 2-26.

FOR CRIMP CONTACTS**CONTACT
INSERTION TOOL**

Part number	Contact dia.	Description
TX00.214	0.5	Tool for inserting male and female removable crimp contacts into the contact block. Especially recommended for small gauge and fragile wires.
TX00.210	0.7	
TX00.211	0.9	
TX00.273	1.3	

Material

Handle: black POM (Delrin®)
Fork: tool steel, chrome plated

**CONTACT
EXTRACTION TOOL**

Part number	Contact dia.	Description
TX00.213	0.5	Tool for extracting male and female removable crimp contacts from the contact block. The sleeve of this tool is pushed over the contact, to release the contact retaining mechanism. The tool plunger is then pushed to eject the contact.
TX00.200	0.7	
TX00.205	0.9	
TX00.212	1.3	
TX00.201	1.6	

Material

Housing and plunger: black POM (Delrin®)
Sleeve: stainless steel
Slide: tool steel

MATERIAL & SURFACE TREATMENT

Metal parts

Metal parts		Material			Finish	
		Designation	ISO	Standard	Designation	Standard
Shell (Housing), clamp nut, decorative slotted nut		Stainless steel	X2CrNiMo17-12-2	316L/1.4404	-	-
Cable clamp, inner sleeve, spacers and rings, nuts and washers		Brass	CuZn39Pb3	CW614N / UNS C 38500	Nickel	SAE-AMS-QQ-N-290 / SAE-AMS2404
Contacts	Male (solder)	Brass	CuZn39Pb3	CW614N / UNS C 38500	1 µm Gold over Nickel	MIL-DTL-45204D / Type 1 + ASTM B488
	Female, Male (crimp)	Bronze	CuSn4Zn4Pb4	CW456K / ASTM B 139 / UNS C 54400		

Other material and surface treatments are available on request.

Insulator and sealing

Contact blocks and other insulators for our standard connectors are manufactured from high performance engineering plastic materials. The standard materials for each connector series are listed under Electrical & contact configurations in pages B 7-13 through B 7-16. Ceramics and other dielectrics are available on special order.

Insulator and sealing	International symbol	Flammability
Insulator	PEEK	UL 94 V-O
Panel and contact block O-rings (receptacles)	FPM (Viton®)	-
Interface O-rings (receptacles)	EPDM	-
Sealant material - IP68 (receptacles) - Hermetic	Silicon compound Epoxy compound	UL 94 V-O UL 94 HB
Cable sealing (plugs) - IP68	TPE-S	UL 94 HB

Our products are RoHs compliant and conform with the EC Directives 2011/65/EU & 2015/863/EU.

ENVIRONMENTAL & MECHANICAL DATA

Characteristic	Product type	Value	Standard
Sealing performance	Unsealed connectors (mated)	IP50	IEC 60529
	Plugs (mated) with general purpose sealed clamps ¹⁾	IP68 IP69	
	Receptacles "U" body style	IP68	
	Receptacles "E" body style	Hermetic: Tested: <10 ⁻⁸ mbar l/s	IEC 60068-2-17 test Qk method 3, alternative b
		IP69	IEC 60529
Operating temperature range	See details on page A-9 and page B7-30		IEC 60512-6-11 i+j / IEC 60068-2-14-Nb
Corrosion resistance		Salt mist, 1000 hours, 5% salt solution, 35°C	IEC 60068-2-11 test Ka MIL-STD-202 method 101 condition A
Endurance		5000 mating cycles	IEC 60512-9-1 / EIA-364-09
Vibration		10 to 2000 Hz, 1.5 mm or 15g, 12 sweep cycles per axis, 20 minutes per 10-2000-10 Hz sweep cycle, no discontinuity > 1us	MIL-STD-202 method 204 condition B
Radiation resistance ²⁾	Unsealed connectors	PEEK: 10 ⁷ Gy (= 1000M Rads)	
	Sealed receptacles "E"	FPM (Viton®) O-rings 10 ⁵ Gy (= 10M Rads)	

¹⁾ The sealing performance can be affected by the long term quality of the cable.

²⁾ For information only. Not tested by Fischer Connectors.

Most of our connectors are completely sterilizable in autoclave, Cidex®, EtO, gamma radiation, Steris® or Sterrad®. Please contact us for more details.
For more information visit: www.fischerconnectors.com

ELECTRICAL DATA

Characteristic	Contact size	Typical values	Standard
Contact resistance 5,000 mating cycles	ø 0.5 mm	5.0 mΩ	IEC 60512-2-1, Test 2a IEC 60512-2-2, Test 2b
	ø 0.7 mm	5.0 mΩ	
	ø 0.9 mm	4.0 mΩ	
	ø 1.3 mm	2.5 mΩ	
	ø 1.6 mm	2.5 mΩ	
	ø 2.3 mm	2.5 mΩ	
	ø 3.0 mm	1.5 mΩ	
Insulation resistance		> 10 ¹⁰ Ω	IEC 60512-3-1-3a Method C


All dimensions and images shown are in millimeters and are for reference only.

OPERATING TEMPERATURES

The temperature ranges quoted by the manufacturers of the plastic materials are usually the absolute maximum values. When exposed to the mechanical and electrical stresses present in a connector, these values are often unachievable.

If a composite connector system including accessories is used, then the item

with the lowest temperature performance will dictate the operating temperature limit of the system. The table below shows our recommended operating temperature ranges.

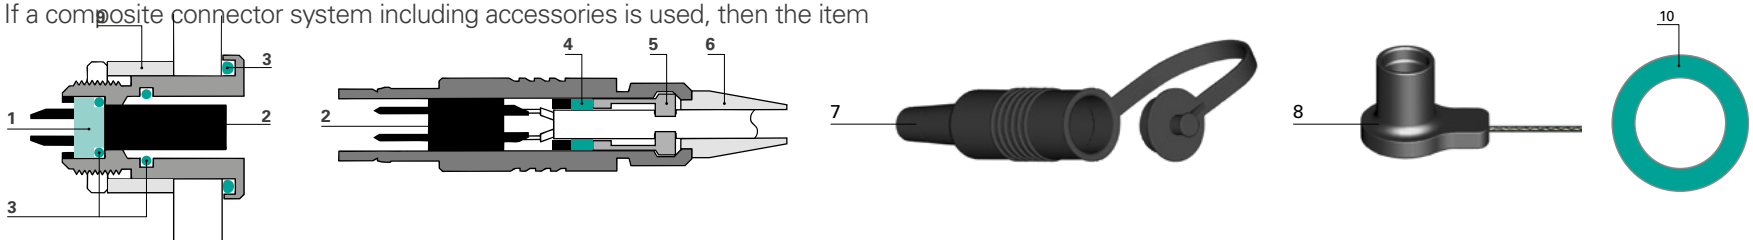

Ref.	Component	Material	
1	Sealant	"U" Type	"E" Type
2	Insulator	PEEK	
3	Panel and contact block O-rings	FPM (Viton®)	
	Interface O-rings	EPDM	
4	Cable Clamp Seal	TPE	
5	Cable Clamp	Brass	
6	Cable Strain Relief	TPE	
		VMQ - Silicone rubber	
7	Protective Boots	TPE	
8	Sealing Caps	Metallic	Plug: Stainless steel with EPDM O-ring
			Receptacle: Stainless steel with EPDM O-ring
		Plastic	POM with FPM O-ring
		Soft Caps	TPE
9	Panel Spacer	Aluminium	
10	Color Coding Washer	PP	


Operating temperatures	
	-55°C to +200°C
	-65°C to +150°C
	-65°C to +250°C
	-20°C to +200°C ¹⁾
	-50°C to +160°C ²⁾
	-70°C to +130°C
	-60°C to +100°C
	-60°C to +180°C
	-60°C to +100°C
	-50°C to +160°C ²⁾
	-50°C to +160°C ²⁾
	-20°C to +100°C ¹⁾
	-20°C to + 85°C
	-20°C to + 60°C

¹⁾ Minimum mating temperature: 0°C.
²⁾ Minimum mating temperature: -20°C.



B8

CHAPTER

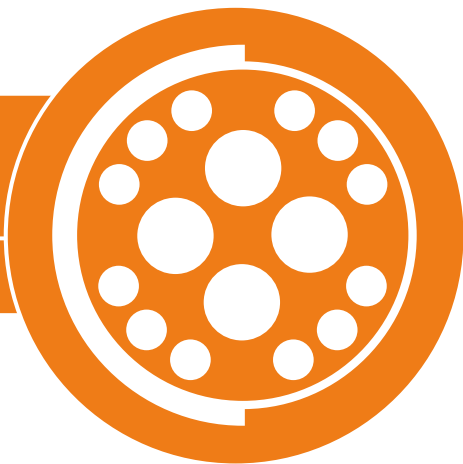

FISCHER CORE SERIES **ALULITE™**

ULTRALIGHT | RUGGED | HIGHLY CONFIGURABLE

KEY FEATURES

- 50% lighter than brass equivalent
- Sealed up to IP68 or hermetic
- Wide range of colors for visual coding
- Over 10,000 mating cycles
- 360° EMC shielded



ALULITE

ALULITE

PLUGS



CABLE MOUNTED

- Body styles (S/SC; SS/SSC)..... B8-4
- Technical dimensions B8-5
- Part numbering..... B8-6

RECEPTACLES



PANEL FRONT MOUNTED

- Body styles (D; DEU/DEE)..... B8-7
- Technical dimensions B8-8
- Part numbering..... B8-9



PANEL REAR MOUNTED

- Body styles (DBPU/DBPE; DBPLU/DBPLE) B8-7
- Technical dimensions B8-10
- Part numbering..... B8-11

FOR ALL ALULITE

- Electrical & contact configurations..... B8-12
- Cable clamp sets B8-19
- Accessories..... B8-25
- Tooling B8-29
- Technical information..... B8-30
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

PLUGS***CABLE
MOUNTED****S****SC****SS****SSC**

BODY STYLES

Locking system	Push-pull	Quick-release	Push-pull	Quick-release
Sealing	IP50/IP68	IP50/IP68	IP50/IP68	IP50/IP68
Design	Standard	Standard	Short/Overmolding	Short/Overmolding

RECEPTACLES***PANEL FRONT
MOUNTED****D****DEU****DEE**

BODY STYLES

Sealing	IP50	IP68	Hermetic
Design	Rear-projecting	Rear-projecting	

**PANEL REAR
MOUNTED****DBPU****DBPE****DBPLU****DBPLE**

BODY STYLES

Sealing	IP68	Hermetic	IP68	Hermetic
Design	Rear-projecting		Front-projecting	

*See full color selection in part numbering sections (pages B 8-6 B 8-9, B 8-11).

All dimensions and images shown are in millimeters and are for reference only.

PLUGS**CABLE
MOUNTED**

Body style		S	SC	SS	SSC	References to detailed information
Protection	Unsealed (IP50)	●	●	●	●	Sealing categories, page A-6
	Sealed up to IP68	●	●	●	●	
Locking system	Push-pull	●		●		Locking systems, page A-5
	Quick-release		●		●	
Contacts	Crimp	●	●	●	●	Electrical & contact configurations, page B8-12
	Solder	●	●	●	●	
Design	Colored housing	●	●	●	●	Body styles, page B8-3
	Shortened body			●	●	
Cabling	Cable clamp sets	●	●			Cable clamp sets, page B 2-39
	Overmoldable			●	●	
	Heat shrinkable			●	●	


Other body styles available on request.

PLUGS

CABLE MOUNTED

S/SC

BODY STYLES

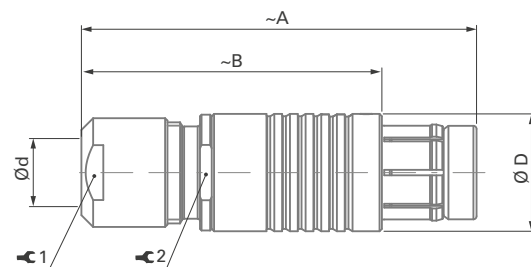


Series	Weight ¹⁾ (~g)	A	B	D	d max		1	Torque 1 [Nm]	2
					Unsealed	Sealed			
102	3	36	26	9	4.7	4.3	7	0.6	7
103	8	46	35	12	6.7	6.2	10	1.0	10
1031	8	48	38	13	7.2	6.7	12	1.5	11
104	11	50	38	15	9.1	8.7	12	2.0	13
105	19	62	47	18	10.7	10.7	15	3.5	16

¹⁾ Weight shown is without cable clamp set, overmolding or heat shrinking.

²⁾ Max. cable diameter below shield.

SS/SSC

BODY STYLES

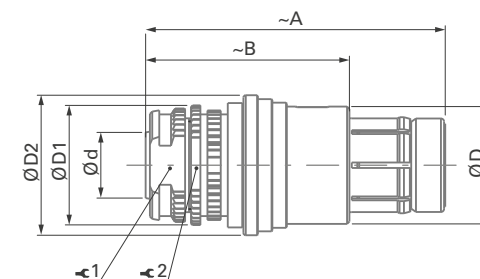

Series	Weight ¹⁾ (~g)	A	B	D	D1	D2	d max ²⁾	1	Torque 1 [Nm]	2
102	3	30	20	9.0	9.5	12.0	3.8	7	0.4 – 0.6	8
103	7	33	22	12.0	12.5	15.0	6.0	10	0.8 – 1.0	11
1031	8	33	23	12.4	13.0	15.5	6.2	10	0.8 – 1.0	11
104	8	38	26	15.0	15.3	18.0	8.0	12	1.5 – 2.0	13
105	16	44	29	18.0	18.4	21.2	10.0	15	1.5 – 2.0	16

All dimensions and images shown are in millimeters and are for reference only.

PLUGS

The configurator is designed for multipole contact blocks only.
For coax or triax blocks, please contact us.



Example:

	Housing			Body style		Size	Contact blocks				Options
	AL	17	31	S	C	103	A	053	SR	11	11
Housing material ■ AL = Aluminum											
Housing color¹⁾											
Housing treatment 1541 = Anthracite (nickel) 1411 = Blue (anodized) 1611 = Red (anodized) 1731 = Grey (chromium)											
Connector style ■ S = Standard body length ■ SS = Shortened body length											
Locking system If standard automatic push-pull locking system is desired, leave field blank. Other option possible: ■ C = Clic Loc, quick-release											
Connector size 102, 103, 1031, 104, or 105 = Series (See dimensions page B8-5)											
											Clamp nut For standard body length plugs (S): ■ 11 = Standard clamp nut, no bend relief. (See pages B8-19 to B8-24) For shortened body length plugs (SS): ■ 13 = For heat shrinking/boots ■ 14 = For injection/overmolding
											Keying code ■ 11 = Code 1 ■ 12 = Code 2 ■ 13 = Code 3
											Contact type ■ SR = Solder ■ CP = Crimp
											Contact configuration Three-digit number (see pages B8-12 to B8-18)
											Polarity ■ A = Male contacts on plug ■ Z = Female contacts on plug

¹⁾ Fischer Connectors cannot be held liable for small color variations that may appear from one batch to another.

Example 1

AL1541-S-103-A062SR11-11

Example 2

AL1541-S-103-A053SR11-11

AL1731-SS-102-A056SR12-13


RECEPTACLES**PANEL
MOUNTED**

Body Style		D	DEU	DEE	DBPU	DBPE	DBPLU	DBPLE	References to detailed information
Protection	Unsealed (IP50)	●	●	●	●	●	●	●	Sealing categories, page A-6
	Sealed up to IP68		●	●	●	●	●	●	
	Hermetic			●		●		●	
Contacts	Crimp	●							Electrical & contact configurations, page B8-12
	Solder	●	●	●	●	●	●	●	
	PCB	●	●	●	●	●	●	●	
Design	Colored housing	●	●	●	●	●	●	●	Body styles, chapter B8-3
	Flush	●	●	●	●	●			
	Front-projecting						●	●	
Assembly	Front-mounting	●	●	●					
	Rear-mounting				●	●	●	●	

Other body styles available on request.

RECEPTACLES**PANEL FRONT
MOUNTED****D**

BODY STYLES

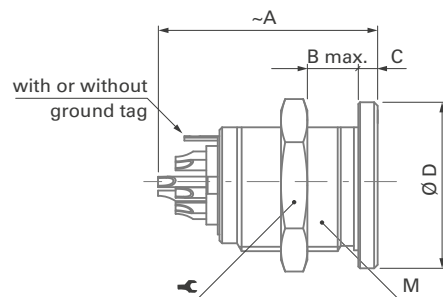

Series	Weight ¹⁾ (~g)	A	B max	C	D	M		Torque [Nm]
102	3	19	9	1.5	11	9x0.5	11	1.3
103	5	23	8	1.5	14	12x1	14	2.5
1031	8	25	10	2.0	16	14x1	17	3.0
104	9	25	11	2.2	19	15x1	17	4.0
105	18	32	15	2.0	22	18x1	22	6.0

Series	G	H	Fig.
102	9.1	8.5	1
103	12.1	11.2	1
1031	14.1	12.1	2
104	15.1	14.2	1
105	18.1	17.3	1

PANEL CUT-OUT




Fig. 1





Fig. 2

DEU/DEE

BODY STYLES

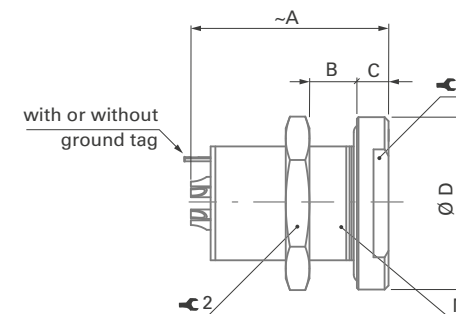

Series	Weight ¹⁾ (~g)	A	B min/max	C	D	M		Torque 1 [Nm]	
102	4	20	8/10 ²⁾	2.5	14	9x0.5	11	1.3	11
103	9	23	0/12	3.0	18	14x1	14	3.0	17
1031	10	25	0/12	3.0	19	14x1	15	3.0	17
104	13	25	0/15	4.0	22	16x1	17	4.5	19
105	28	33	0/18	4.0	27	20x1	22	6.5	25

Series	G	H	Fig.
102	10.1	9.2	3
103	14.1	12.5	3
1031	14.1	13.0	2
104	16.1	14.5	3
105	20.1	18.5	3

PANEL CUT-OUT




Fig. 2




Fig. 3

¹⁾ Weight includes nut.²⁾ In the 102 Series only, the thread does not go all the way to the flange but stops 8 mm away. For panels thinner than 8 mm, spacers are available.

RECEPTACLES**PANEL FRONT
MOUNTED**

The configurator is designed for multipole contact blocks only.
For coax or triax blocks, please contact us.

**SPACERS****FOR DEU/DEE
BODY STYLES
OF THE 102 SERIES**

Panel width	Spacer part number
0.5 - 3.0	102.550
2.5 - 5.5	102.551
5.0 - 8.0	102.552

Material: aluminium

All dimensions and images shown are in millimeters and are for reference only.

Example:

	Housing			Body style		Size	Contact blocks				Options		
	AL	14	11	D	EE	103	A	062	SR	11	11	G	11
Housing material	■ AL = Aluminum										Nut type ■ 11 = Hexagonal ■ 12 = None		
Housing color¹⁾											Grounding ■ G = Yes ■ Z = No		
Housing treatment	1541 = Anthracite (nickel) ■ 1411 = Blue (anodized) ■ 1611 = Red (anodized) ■ 1731 = Grey (chromium) ■										O-ring at plug interface If 'No sealing level' chosen in section BC, leave field blank. Options possible if you selected 'Sealed (IP68) even unmated' or 'Hermetic': ■ 11 = Viton ■ 12 = EPDM (low temperature)		
Connector style	■ D = Flush (vs. panel) Front-mounting receptacle										Keying code ■ 11 = Code 1 ○ ■ 12 = Code 2 ○ ■ 13 = Code 3 ○		
Sealing level	If no sealing level is desired, leave field blank. Other options possible: ■ EU = Sealed (IP68) even unmated ■ EE = Hermetic										Contact type Options possible if no sealing level is required: ■ SR = Solder ■ CP = Crimp "D" only ■ PB = PCB Options possible if selected sealing level is 'Sealed (IP68) even unmated' or 'Hermetic': ■ SR = Solder ■ PB = PCB		
Connector size	102, 103, 1031, 104, or 105 = Series (See dimensions section)										Contact configuration Three-digit number (see pages B8-12 to B8-18)		
											Polarity ■ A = Female contacts on receptacle ■ Z = Male contacts on receptacle		


Example 1

AL1611-DEU-1031-A019SR11-11G11

Example 2

AL1411-DEU-102-A053SR11-11G11

¹⁾ Fischer Connectors can not be held liable for small color variations that may appear from one batch to another.

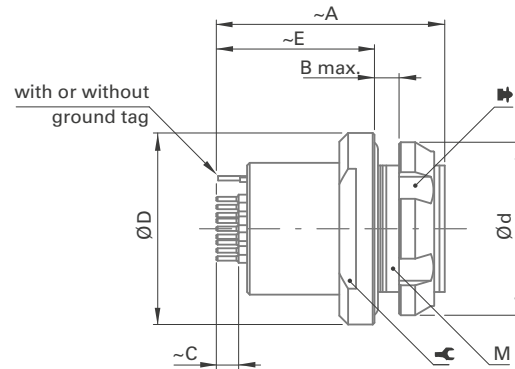RECEPTACLES**PANEL REAR
MOUNTED****DBPU/DBPE****BODY STYLES**

SERIES	Weight ¹⁾ (~g)	A ²⁾	B max	D	d	E ²⁾	C ²⁾	M ³⁾		Torque [Nm]
102	3	20	3.5	14	12	13	2.54	9x0.5	11	1.3
103	8	26	4.0	18	18	18	2.54	14x1	15	3.0
1031	8	23	3.0	19	18	15	2.54	14x1	15	3.0
104	11	26	4.0	22	20	18	2.54	16x1	17	4.5
105	26	30	5.0	27	25	20	2.54	20x1	22	6.5

¹⁾ Weight includes nut.

²⁾ Pin length and diameter vary according to contact configuration. Contact us for more information.

³⁾ For information on nutdrivers (), see Tooling page B8-29.

SERIES	G	H	Fig.
102	9.1	8.0	3
103	14.1	12.5	3
1031	14.1	12.1	2
104	16.1	14.5	3
105	20.1	18.5	3


PANEL CUT-OUT

Fig. 2


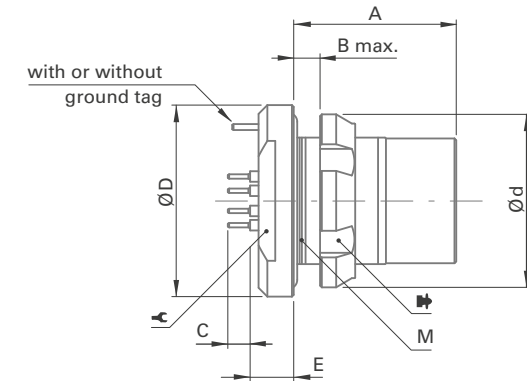


Fig. 3

DBPLU/DBPLE**BODY STYLES**

SERIES	Weight ¹⁾ (~g)	A	B	C	d	D	E	M ³⁾		Torque [Nm]
102	3	14.2	4.5	2.54	13	14	3.6	10x0.5	11	1.5
103	8	16.5	5.0	2.54	18	18	4.2	14x1	15	3.0
1031	8	16.0	5.5	2.54	20	19	4.2	15x1	15	4.0
104	11	18.5	6.5	2.54	20	22	5.0	16x1	17	4.5
105	26	22.5	8.0	2.54	25	27	5.5	20x1	22	6.5

* – Pin for PCB contacts versions; all Series.

– Tag for solder contact versions; Series 103 to 107.

– Barrel for solder contact versions; Series 102.

SERIES	G	H	Fig.
102	10.1	9.2	3
103	14.1	12.5	3
1031	15.1	13.5	2
104	16.1	14.5	3
105	20.1	18.5	3


PANEL CUT-OUT

Fig. 2




Fig. 3

RECEPTACLES

**PANEL REAR
MOUNTED**

The configurator is designed for multipole contact blocks only.
For coax or triax blocks, please contact us.

**Example 1:**

AL1541-DBPLU-102-A059PB12-12G13

Example 2:

AL1541-DBPLE-102-Z054SR11-11G13

	Housing			Body style		Size	Contact blocks				Options		
Example:	AL	15	41	DBPL	E	103	A	062	PB	11	11	G	13
Housing material												Nut type	
■ 13 = Slotted nut													
Grounding													
Housing color ¹⁾											■ G = Yes ■ Z = No		
Housing treatment											O-ring at plug interface		
1541 = Anthracite (nickel) ■ 1411 = Blue (anodized) ■ 1611 = Red (anodized) ■ 1731 = Grey (chromium) ■											■ 11 = Viton ■ 12 = EPDM (low temperature)		
Connector style											Keying code		
■ DBP = Flush (vs. panel) Rear-mounting receptacle ■ DBPL=Front-projecting (vs. panel) Rear-mounting receptacle											■ 11 = Code 1 ○ ■ 12 = Code 2 ○ ■ 13 = Code 3 ○		
Sealing level											Contact type		
■ U= Sealed (IP68) even unmated ■ E = Hermetic											■ SR= Solder ■ PB= PCB		
Connector size											Contact configuration		
102, 103, 1031, 104 or 105 = Series (See dimensions section)											Three-digit number (see pages B8-12 to B8-18)		
											Polarity		
											■ A= Female contacts on receptacle ■ Z = Male contacts on receptacle		

¹⁾ Fischer Connectors can not be held liable for small color variations that may appear from one batch to another.

¹⁾ Fischer Connectors can not be held liable for small color variations that may appear from one batch to another.

102 SERIES

● = Standard ○ = Option

Reference	Pin layout	Number of contacts	Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] <i>in mated position</i>				Rated voltage ⁴⁾ rms [V]	Current ³⁾ [A]
			Solder	Crimp ⁶⁾	PCB					AC rms		DC			
								Solder contacts ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body	Contact to contact		
102 $\frac{A}{Z}$ 051		2	●	● ⁷⁾	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.3	1.7	1.8	2.4	≤ 250	9.2
102 $\frac{A}{Z}$ 052		3	●		●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.3	1.3	1.8	1.6	≤ 250	8.2
102 $\frac{A}{Z}$ 053		4	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.2	1.2	1.7	1.8	≤ 200	5.5
102 $\frac{A}{Z}$ 054		5	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	0.8	1.0	1.3	1.8	≤ 160	5.2
102 $\frac{A}{Z}$ 056		7	●	●	●	PEEK	0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	max ø0.43mm min ø0.20mm AWG28-32	0.8	1.0	1.3	1.8	≤ 160	2.0
102 $\frac{A}{Z}$ 059		9	●		●	PEEK	0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	–	0.8	1.1	1.2	1.8	≤ 160	1.7

¹⁾ Wire gauge stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with S plug and D receptacle.⁶⁾ Plug with crimp contacts must be used with unshielded clamps only.⁷⁾ Only available for A polarity plugs.

103 & 1031 SERIES

● = Standard ○ = Option

References	Pin layout	Number of contacts	Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] in mated position				Rated voltage ⁴⁾ rms [V]	Current ³⁾ [A]
			AC rms		DC										
			Solder	Crimp	PCB			Solder contacts ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body	Contact to contact		
103 ^A _Z 051		2	●	●	●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm min ø0.58mm AWG18-24	1.5	2.2	2.2	3.0	≤ 250	13
103 ^A _Z 052		3	●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.2	1.5	1.8	2.0	≤ 250	12
103 ^A _Z 053		4	●		●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.2	1.6	2.0	2.4	≤ 250	7.0
103 ^A _Z 054		5	●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.1	1.4	1.9	2.2	≤ 250	6.8
103 ^A _Z 056		6	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.0	1.3	2.0	2.0	≤ 250	5.2
103 ^A _Z 057		7	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.0	1.3	2.0	2.0	≤ 250	5.0
103 ^A _Z 058		8	●		●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	0.8	1.1	1.4	1.9	≤ 200	3.8
103 ^A _Z 062		12	●		●	PEEK	0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	max ø0.43mm min ø0.20mm AWG28-32	0.9	1.2	1.5	1.8	≤ 200	2.0
1031 ^A _Z 010		10	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.4	1.5	2.0	2.2	≤ 250	4.5
1031 ^A _Z 012		12	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.4	1.5	2.0	2.2	≤ 250	4.2
1031 ^A _Z 019		19	●	●	●	PEEK	0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	max ø0.43mm min ø0.20mm AWG28-32	1.2	0.9	2.0	1.5	≤ 250	2.5

¹⁾ Wire gauge stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could be larger than the hole diameter of the barrel. Testing maybe required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with S plug and D receptacle.

104 SERIES

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁶⁾ [kV] in mated position				Rated voltage ⁴⁾ rms [V]	Current ³⁾ [A]
				Solder	Crimp	PCB					AC rms		DC			
									Solder contacts ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body	Contact to contact		
104 A Z 051		2		● ○		● ○	PEEK PTFE	1.6	max ø1.86mm AWG13 [1] AWG14 [7/22]	–	1.8	2.2	2.8	3.2	≤ 500	20
104 A Z 040		3		●	●	●	PBT	1.6	max ø1.86mm AWG13 [1] AWG14 [7/22]	max ø1.78mm min ø1.17mm AWG14-18	1.6	2.0	2.6	3.0	≤ 500	18
104 A Z 037		4		●	●	●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm min ø0.58mm AWG18-24	1.8	2.2	2.5	3.0	≤ 500	12
104 A Z 087		4	2	●		●	PBT	2.3	max ø2.48mm AWG11 [1] AWG12 [7/20]	–	1.5	1.6	2.2	2.5	≤ 400	28
			2					0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	2.0		2.8			3.0
104 A Z 053		5		●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.4	1.7	2.4	2.7	≤ 320	11
104 A Z 065		6		●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.7	2.0	2.4	2.6	≤ 400	6.5
104 A Z 054		7		●		●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.5	1.8 ⁵⁾	2.2	2.0 ⁵⁾	≤ 320	6.5
												2.1		2.8		

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Test voltages between the contacts with the shortest distance.⁶⁾ Measured with S plug and D receptacle.

104 SERIES

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁶⁾ [kV] in mated position				Rated voltage ⁴⁾ rms [V]	Current ³⁾ [A]
				Solder	Crimp	PCB					AC rms		DC			
									Solder contacts ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body	Contact to contact		
104 A Z 066		8		●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.5	1.5	2.5	2.5	≤ 320	6.2
104 A Z 055		9	1	●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	2.4	2.2	3.8	3.6	≤ 250	12
			8					0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.4	1.5	2.0	2.4		6.0
104 A Z 056		11		●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.4	1.5	2.1	2.2	≤ 250	5.8
104 A Z 086		16		●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.0	1.5	1.6	2.2	≤ 200	4.0
104 A Z 092		19		●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	0.8	1.2	1.2	1.8	≤ 200	3.5
104 A124 ⁵⁾		27		●	●	●	PEEK	0.5	–	max ø0.43mm min ø0.20mm AWG28-32	1.2	0.5	1.8	0.5	≤ 200	2.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Solder and PCB contact types available only for DBPU and DBPLU receptacles. Crimp contact type available only for plugs.⁶⁾ Measured with S plug and D receptacle.

105 SERIES

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁶⁾ [kV] in mated position				Rated voltage ⁴⁾ rms [V]	Current ³⁾ [A]
				Solder	Crimp	PCB					AC rms		DC			
									Solder contact ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body	Contact to contact		
105 A Z 051		2		●			PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	2.5	3.0	4.0	4.0	≤ 630	26
105 A Z 087		2		●			PEEK	3.0	max ø3.13mm AWG9 [1] AWG10 [105/30]	–	1.2	1.6	2.3	3.0	≤ 400	30
105 A Z 052		3		●			PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	2.0	2.5	3.0	3.5	≤ 400	23
105 A Z 053 ⁵⁾		4		●			PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	1.8	1.8	2.6	2.6	≤ 320	20
105 A Z 054 ⁵⁾		7	1	●			PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	3.0	2.0	4.0	3.0	≤ 320	25
			6					1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.8	1.5	2.5	2.0		7.0
105 A Z 067		8		●			PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.7	2.0	2.5	2.8	≤ 320	10
105 A 124		8	2	●			PEEK	2.3	max ø2.48mm AWG11 [1] AWG12 [7/20]	–	1.2	2.2	1.8	3.2	≤ 250	18.5
			6					1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.2	1.2	1.8	1.8		7.5
105 A Z 101 ⁵⁾		9	1	●	●		PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	3.0	2.0	4.0	3.0	≤ 320	25
			8					1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.8	1.5	2.5	2.0		5.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Contact dia. 2.0 is positioned to make contact first and break last.⁶⁾ Measured with S plug and D receptacle.

105 SERIES

● = Standard ○ = Option

Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁸⁾ [kV] in mated position				Rated voltage ⁴⁾ rms [V]	Current ³⁾ [A]
				Solder	Crimp	PCB					AC rms		DC			
									Solder contacts ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body	Contact to contact		
105 A Z 062		10		●	●	●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm min ø0.58mm AWG18-24	1.7	2.0	2.5	2.7	≤ 320	9.0
105 A Z 069		12		●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	-	1.4	1.5	1.8	2.0	≤ 250	8.0
105 A Z 104 ⁵⁾		13	3	●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	-	2.5	1.5	3.8	2.2	≤ 320	14
			10					0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	-	1.3	1.5	1.8	2.2		1.0
105 A 127 ⁷⁾		13	3		●		PEEK	1.3	-	max ø1.18mm min ø0.58mm AWG18-24	3.0	2.8	4.8	3.9	≤ 320	14
			10					0.7	-	max ø0.62mm min ø0.38mm AWG24-28	3.1	1.1	4.7	1.9		1.0
105 A Z 058		15		●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.4	1.6	1.8	2.2	≤ 250	5.3
105 A Z 110 ⁶⁾		16	4	●		●	PEEK	1.6	max ø1.86mm AWG13 [1] AWG14 [7/22]	-	1.6	1.3	2.8	2.1	≤ 250	14
			12					0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	-	1.0	1.2	1.5	2.0		1.0
105 A Z 038		18		●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.4	1.6	1.8	2.2	≤ 200	4.5
105 A Z 093		24		●		●	PBT	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	-	1.2	1.5	1.5	2.0	≤ 250	3.5
105 A Z 102		27		●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.2	1.5	1.5	2.0	≤ 250	3.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Contacts dia. 1.3 are positioned to make contact first and break last.⁶⁾ Contacts dia. 1.6 are positioned to make contact first and break last.⁷⁾ Inverted polarity: female contacts on plug/male contact on receptacle⁸⁾ Measured with S plug and D receptacle.

CONTACT TYPES

CRIMP CONTACTS



- Selectively annealed area
- Special tools required
- Limited range of wire sizes
- Each contact has a selectively annealed area which is crushed during assembly by specialized tooling to ensure proper termination of the wire to the contact.
- Commonly used for field termination or repair, as no soldering is required.
- Not available for sealed or hermetic connectors.


TOOLING FOR CRIMP CONTACTS

Series	Polarity	Contact diameter (mm)									
		0.5		0.7		0.9		1.3		1.6	
		Part number		Part number		Part number		Part number		Part number	
		Contact	Positioner	Contact	Positioner	Contact	Positioner	Contact	Positioner	Contact	Positioner
102	Male	200.2113	TX00.300	200.2884	TX00.304	200.2890	TX00.307	-	-	-	-
	Female	200.2114	TX00.302	200.2885	TX00.305	200.2892	TX00.309	-	-	-	-
103	Male	200.2113	TX00.300	200.2884	TX00.304	200.2890	TX00.307	200.2402	TX00.311	-	-
	Female	200.2114	TX00.302	200.2885	TX00.305	200.2892	TX00.309	200.2214	TX00.312	-	-
1031	Male	200.2172	TX00.301	200.2884	TX00.304	200.2890	TX00.307	200.2402	TX00.311	-	-
	Female	200.2183	TX00.303	200.2885	TX00.305	200.2892	TX00.309	200.2214	TX00.312	-	-
104	Male	200.2172	TX00.301	200.2884	TX00.304	200.2890	TX00.307	200.2402	TX00.311	200.1653	TX00.313
	Female	200.2183	TX00.303	200.2885	TX00.305	200.2892	TX00.309	200.2214	TX00.312	200.1654	TX00.314
105	Male	-	-	200.2884	TX00.304	200.2891	TX00.308	200.2403	TX00.338	200.1653	TX00.313
	Female	-	-	200.2886	TX00.306	200.2893	TX00.310	200.2214	TX00.312	200.1654	TX00.314
Crimp tool part number		TX00.240		TX00.240		TX00.240		TX00.240		TX00.242	

See section Tooling, section B 6-21, for description of Crimping Tool and Positioner.

Please refer to www.fischerconnectors.com/technical for detailed information and assembly instructions.

CABLE CLAMP SETS

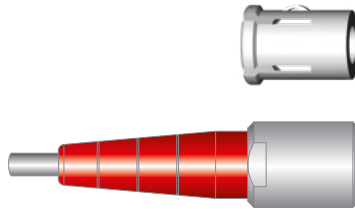

To guarantee excellent cable retention and strain relief, Fischer Connectors provides robust and high quality cable clamp sets:

- Collet style clamp system retains cable over large jacket surface area.
- Protection of small diameters and delicate conductors.
- Can be combined with cable bend reliefs for optimal performance.

Cable clamp sets are used with cable mounted connectors, except SS/SSC which require overmolding or heat shrinking techniques.

RANGE OVERVIEW: S, U & E CABLE CLAMP SETS

Fischer Connectors offers three types of cable clamps sets.
The table below will help you select the one corresponding to your needs.

Cable clamp set	Do you need the interface between the cable and the connector to be sealed?	
	Unsealed	Sealed
S - Shielded	●	
U - Unshielded	●	
E - Environmental		●

Do you need the connector to be terminated to the cable shield?	
Unshielded	Shielded
	●
●	
●	●

PART NUMBERING

Cable clamp sets are ordered separately
Multipole low voltage
AL1731-S-102-A056SR11-11
Examples connector ordering line
AL1731-S-102-A056SR11-11
Clamp set ordering line
E3 102.5/2.0

See following pages for cable clamp set selection.

102 SERIES

S
SHIELDED

Shielded cable clamp with sleeve and clamp.



Cable dia. range	Collet Ø	Cable clamp set
1.5 - 2.1	2.1	E32 102.1/2.1 + A
2.1 - 2.6	2.6	E32 102.1/2.6 + A
2.6 - 3.1	3.1	E32 102.1/3.1 + A
3.1 - 3.6	3.6	E32 102.1/3.6 + A
3.6 - 4.1	4.1	E32 102.1/4.1 + A
4.1 - 4.3	4.3	E32 102.1/4.3 + A
4.3 - 4.7	4.7	E3 102.248 + A

U
UNSHIELDED


Unshielded, one-piece cable clamp.



Cable dia. range	Collet Ø	Cable clamp set
1.4 - 2.0	2.0	E3 102.5/2.0
2.0 - 2.7	2.7	E3 102.5/2.7
2.7 - 3.5	3.5	E3 102.5/3.5
3.5 - 4.2	4.2	E3 102.5/4.2
4.2 - 4.7	4.7	E3 102.5/4.7

E
ENVIRONMENTAL


Environmentally sealed clamp for use with shielded or unshielded cables.

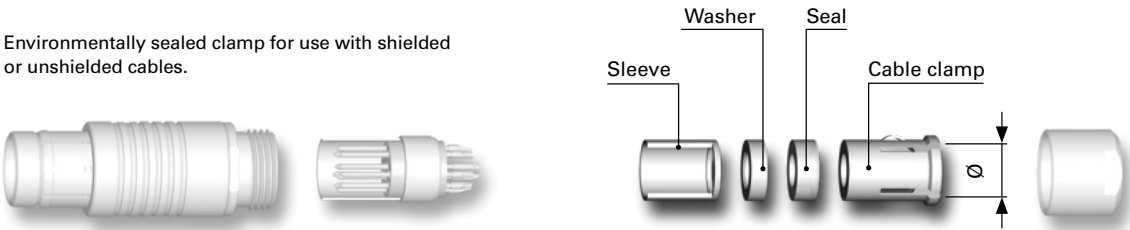

Cable dia. range	Collet Ø	Cable clamp set
1.5 - 2.1	2.1	E31 102.2/2.1 + B
2.1 - 2.6	2.6	E31 102.2/2.6 + B
2.6 - 3.1	3.1	E31 102.2/3.1 + B
3.1 - 3.6	3.6	E31 102.2/3.6 + B
3.6 - 4.1	4.1	E31 102.2/4.1 + B
4.1 - 4.3	4.3	E31 102.2/4.3 + B

103 SERIES**S**
SHIELDED


Shielded cable clamp with sleeve and clamp.

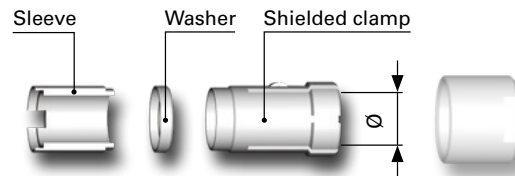

Cable dia. range	Collet Ø	Cable clamp set PEEK or PBT insulator
1.7 - 2.2	2.2	E31 103.1/2.2 + B
2.2 - 2.7	2.7	E31 103.1/2.7 + B
2.7 - 3.2	3.2	E31 103.1/3.2 + B
3.2 - 3.7	3.7	E31 103.1/3.7 + B
3.7 - 4.2	4.2	E31 103.1/4.2 + B
4.2 - 4.7	4.7	E31 103.1/4.7 + B
4.7 - 5.2	5.2	E31 103.1/5.2 + B
5.2 - 5.7	5.7	E31 103.1/5.7 + B
5.7 - 6.2	6.2	E31 103.1/6.2 + B
6.2 - 6.7	6.7	E31 103.1/6.7 + B

U
UNSHIELDED


Unshielded, one-piece cable clamp.

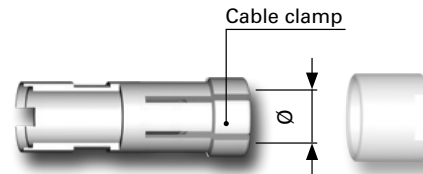

Cable dia. range	Collet Ø	Cable clamp set PEEK or PBT insulator
2.2 - 3.2	3.2	E3 103.6/3.2
3.2 - 4.2	4.2	E3 103.6/4.2
4.2 - 4.7	4.7	E3 103.6/4.7
4.7 - 5.2	5.2	E3 103.6/5.2
5.2 - 5.7	5.7	E3 103.6/5.7
5.7 - 6.2	6.2	E3 103.6/6.2
6.2 - 6.7	6.7	E3 103.6/6.7

E
ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.

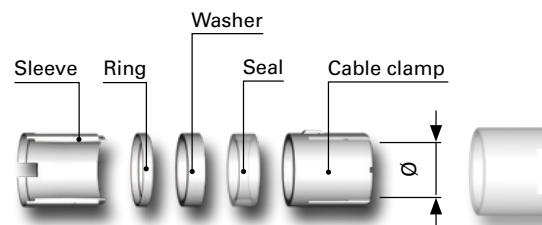


Cable dia. range	Collet Ø	Cable clamp set PEEK or PBT insulator
1.7 - 2.2	2.2	E31 103.2/2.2 + B
2.2 - 2.7	2.7	E31 103.2/2.7 + B
2.7 - 3.2	3.2	E31 103.2/3.2 + B
3.2 - 3.7	3.7	E31 103.2/3.7 + B
3.7 - 4.2	4.2	E31 103.2/4.2 + B
4.2 - 4.7	4.7	E31 103.2/4.7 + B
4.7 - 5.2	5.2	E31 103.2/5.2 + B
5.2 - 5.7	5.7	E31 103.2/5.7 + B
5.7 - 6.2	6.2	E31 103.2/6.2 + B

1031 SERIES

S
SHIELDED


Shielded cable clamp with sleeve and clamp.

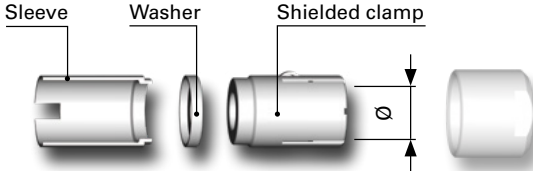

Cable dia. range	Collet Ø	Cable clamp set
2.2 - 2.7	2.7	E3 1031.1/2.7
2.7 - 3.2	3.2	E3 1031.1/3.2
3.2 - 3.7	3.7	E3 1031.1/3.7
3.7 - 4.2	4.2	E3 1031.1/4.2
4.2 - 4.7	4.7	E3 1031.1/4.7
4.7 - 5.2	5.2	E3 1031.1/5.2
5.2 - 5.7	5.7	E3 1031.1/5.7
5.7 - 6.2	6.2	E3 1031.1/6.2
6.2 - 6.7	6.7	E3 1031.1/6.7
6.7 - 7.2	7.2	E3 1031.1/7.2

U
UNSHIELDED


Unshielded, one-piece cable clamp.

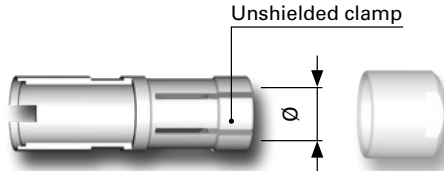

Cable dia. range	Collet Ø	Cable clamp set
2.2 - 2.7	2.7	E3 1031.6/2.7
2.7 - 3.2	3.2	E3 1031.6/3.2
3.2 - 3.7	3.7	E3 1031.6/3.7
3.7 - 4.2	4.2	E3 1031.6/4.2
4.2 - 4.7	4.7	E3 1031.6/4.7
4.7 - 5.2	5.2	E3 1031.6/5.2
5.2 - 5.7	5.7	E3 1031.6/5.7
5.7 - 6.2	6.2	E3 1031.6/6.2
6.2 - 6.7	6.7	E3 1031.6/6.7
6.7 - 7.2	7.2	E3 1031.6/7.2

E
ENVIRONMENTAL


Environmentally sealed clamp for use with shielded or unshielded cables.

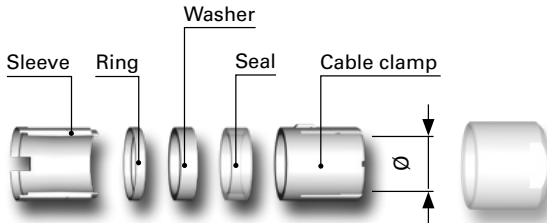

Cable dia. range	Collet Ø	Cable clamp set
2.2 - 2.7	2.7	E3 1031.2/2.7
2.7 - 3.2	3.2	E3 1031.2/3.2
3.2 - 3.7	3.7	E3 1031.2/3.7
3.7 - 4.2	4.2	E3 1031.2/4.2
4.2 - 4.7	4.7	E3 1031.2/4.7
4.7 - 5.2	5.2	E3 1031.2/5.2
5.2 - 5.7	5.7	E3 1031.2/5.7
5.7 - 6.2	6.2	E3 1031.2/6.2
6.2 - 6.7	6.7	E3 1031.2/6.7

104 SERIES**S**
SHIELDED


Shielded cable clamp with sleeve and clamp.

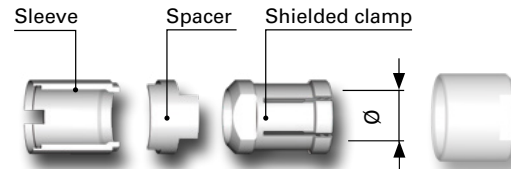

Cable dia. range	Collet Ø	Cable clamp set PEEK or PBT insulator
		Plug
2.9 - 4.0	4.0	E3 104.3/4.0 + B
4.0 - 4.7	4.7	E3 104.3/4.7 + B
4.7 - 5.7	5.7	E3 104.3/5.7 + B
5.7 - 6.7	6.7	E3 104.3/6.7 + B
6.7 - 7.7	7.7	E3 104.3/7.7 + B
7.7 - 8.7	8.7	E3 104.3/8.7 + B
8.7 - 9.1	9.1	E3 104.3/9.1 + B

U
UNSHIELDED


Unshielded, one-piece cable clamp.

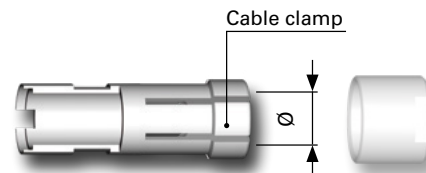

Cable dia. range	Collet Ø	Cable clamp set PEEK or PBT insulator
4.2 - 4.7	4.7	E3 104.6/4.7
4.7 - 5.7	5.7	E3 104.6/5.7
5.7 - 6.7	6.7	E3 104.6/6.7
6.7 - 7.7	7.7	E3 104.6/7.7
7.7 - 8.2	8.2	E3 104.6/8.2
8.2 - 8.7	8.7	E3 104.6/8.7

E
ENVIRONMENTAL


Environmentally sealed clamp for use with shielded or unshielded cables.

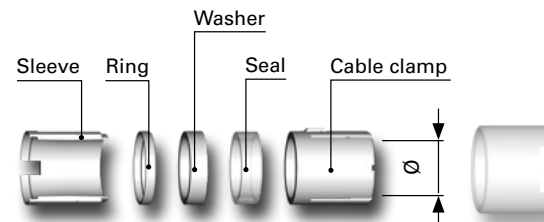

Cable dia. range	Collet Ø	Cable clamp set PEEK or PBT insulator
		Plug
2.9 - 4.0	4.0	E3 104.2/4.0 + B
4.0 - 4.7	4.7	E3 104.2/4.7 + B
4.7 - 5.7	5.7	E3 104.2/5.7 + B
5.7 - 6.7	6.7	E3 104.2/6.7 + B
6.7 - 7.7	7.7	E3 104.2/7.7 + B
7.7 - 8.7	8.7	E3 104.2/8.7 + B

105 SERIES**S**
SHIELDED


Shielded cable clamp with sleeve and clamp.

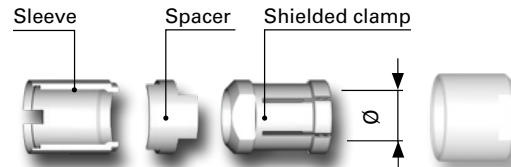

Cable dia. range	Collet Ø	Cable clamp set PEEK or PBT insulator
3.2 - 4.2	4.2	E3 105.1/4.2 + B
4.2 - 5.2	5.2	E3 105.1/5.2 + B
5.2 - 6.2	6.2	E3 105.1/6.2 + B
6.2 - 7.2	7.2	E3 105.1/7.2 + B
7.2 - 8.2	8.2	E3 105.1/8.2 + B
8.2 - 9.2	9.2	E3 105.1/9.2 + B
9.2 - 10.0	10.0	E3 105.1/10.0 + B
10.0 - 10.7	10.7	E3 105.1/10.7 + B

U
UNSHIELDED


Unshielded, one-piece cable clamp.

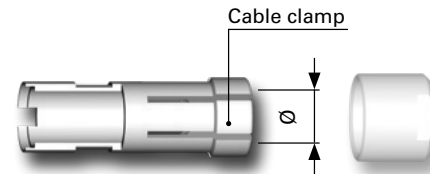

Cable dia. range	Collet Ø	Cable clamp set PEEK or PBT insulator
2.5 - 3.5	3.5	E3 105.6/3.5
3.5 - 4.5	4.5	E3 105.6/4.5
4.5 - 5.5	5.5	E3 105.6/5.5
5.5 - 6.5	6.5	E3 105.6/6.5
6.5 - 7.5	7.5	E3 105.6/7.5
7.5 - 8.5	8.5	E3 105.6/8.5
8.5 - 9.5	9.5	E3 105.6/9.5
9.5 - 10.5	10.5	E3 105.6/10.5

E
ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.

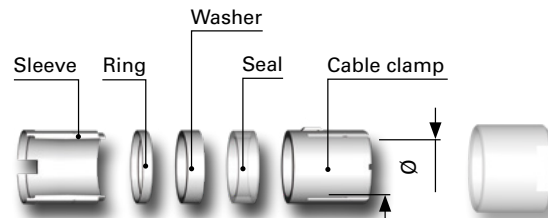

Cable dia. range	Collet Ø	Cable clamp set PEEK or PBT insulator
3.2 - 4.2	4.2	E31 105.2/4.2 + B
4.2 - 5.2	5.2	E31 105.2/5.2 + B
5.2 - 6.2	6.2	E31 105.2/6.2 + B
6.2 - 7.2	7.2	E31 105.2/7.2 + B
7.2 - 8.2	8.2	E31 105.2/8.2 + B
8.2 - 9.2	9.2	E31 105.2/9.2 + B
9.2 - 10.0	10.0	E31 105.2/10.0 + B
10.0 - 10.7	10.7	E31 105.2/10.7 + B


SOFT CAPS - LANYARD WITH POLYESTER CORD

FOR PLUGS



Accessories	Description	Part Number
	Crimp ferrule	300.637
	Crimp lug	300.299
	Heat shrink tube	300.930

Crimp ferrule, crimp lug and heat shrink tube have to be ordered separately.
Material: Cap: Santoprene™ TPV 101-80 / Cord: Polyester.

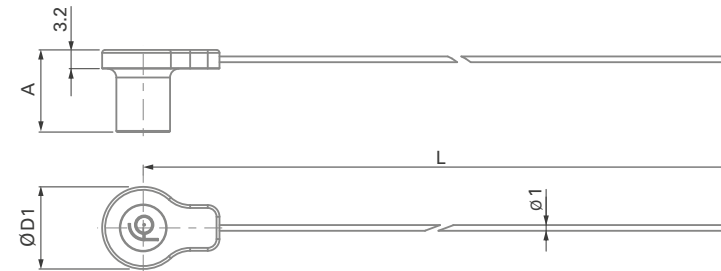


Series	A	D1	L	Part Number
102	14.0	14	200	102.2180
103	14.7	17	200	103.2405
1031	14.0	18	200	1031.1432
104	16.0	20	200	104.2807
105	19.0	23	200	105.3264

FOR RECEPTACLES



Accessories	Description	Part Number
	Crimp ferrule	300.637
	Crimp lug	300.299
	Heat shrink tube	300.930

To attach the crimp ferrule or the crimp lug to the polyester cord, use a crimp tool, a vice or a pair of pliers with parallel jaws. There are no specific Fischer Connectors tools.

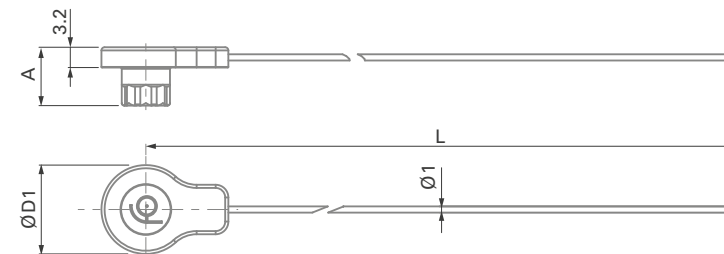


Series	A	D1	L	Part Number
102	9.2	14	200	102.2181
103	9.7	17	200	103.2406
1031	9.5	18	200	1031.1433
104	10.0	20	200	104.2808
105	10.0	23	200	105.3265

All dimensions and images shown are in millimeters and are for reference only.


SOFT CAPS - ONE-PIECE

FOR PLUGS

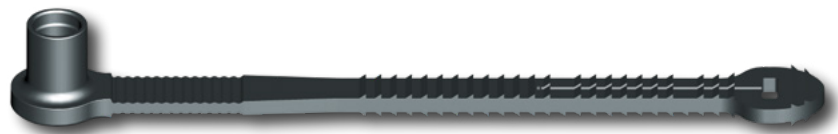

Series	A	D1	L	Part Number
102	14.0	14	122	102.2169
103	14.7	17	147	103.2399
1031	14.0	18	148	1031.1425
104	16.0	20	164	104.2766
105	19.0	23	186	105.3253


Material: Santoprene™ TPV 101-80

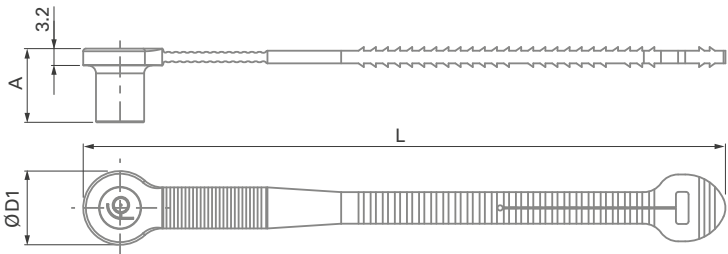

FOR RECEPTACLES



Series	A	D1	L	Part Number
102	9.2	14	122	102.2166
103	9.7	17	147	103.2396
1031	9.5	18	148	1031.1422
104	10.0	20	164	104.2763
105	10.0	23	186	105.3250

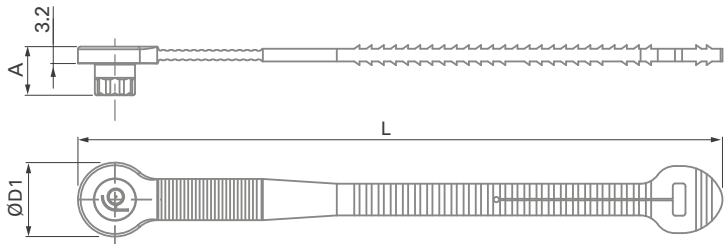


SOFT CAPS - LANYARD WITH STAINLESS STEEL CABLE**FOR PLUGS**

Series	A	D1	L	Part Number
102	14.0	14	200	102.2185
103	14.7	17	200	103.2404
1031	14.0	18	200	1031.1431
104	16.0	20	200	104.2806
105	19.0	23	200	105.3263


Crimp ferrule (300.922) and heat shrink tube (300.930) are included.

Material: Cap: Santoprene™ TPV 101-80 / Cable: Stainless steel with FEP-Teflon® covering

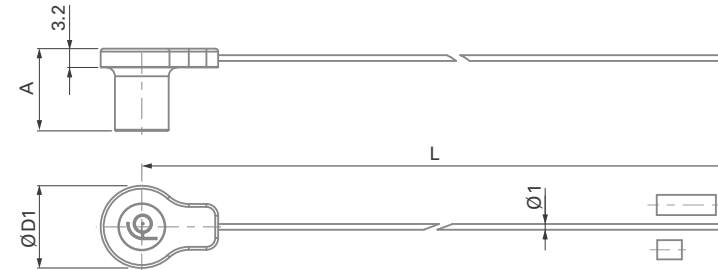**FOR RECEPTACLES**

Series	A	D1	L	Part Number
102	9.2	14	200	102.2167
103	9.7	17	200	103.2397
1031	9.5	18	200	1031.1423
104	10.0	20	200	104.2764
105	10.0	23	200	105.3251


To attach the crimp ferrule or the crimp lug to the stainless steel cable, use a crimp tool, a vice or a pair of pliers with parallel jaws. See page B6-22 for recommended crimping tool for ferrule.

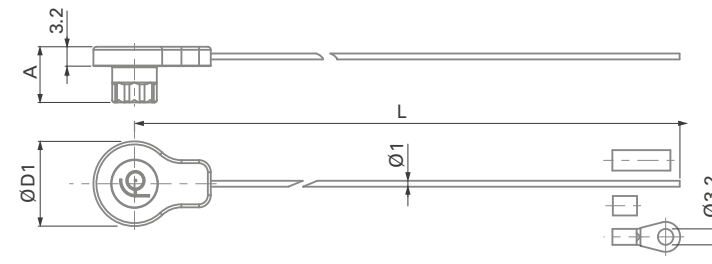

All dimensions and images shown are in millimeters and are for reference only.

SOFT CAPS - LANYARDS WITH STAINLESS STEEL CABLE (PRE-ASSEMBLED)

FOR RECEPTACLES

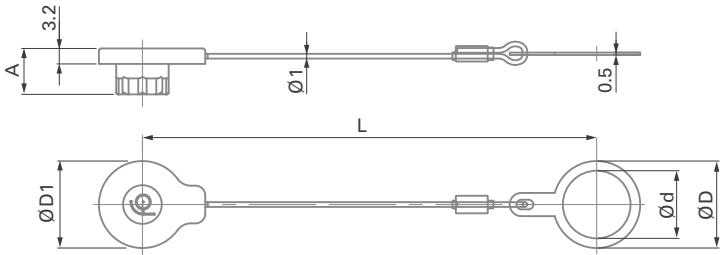

Series	A	D1	L	d	D	Part Number
102	9.2	14	86	9	13	102.2182
	9.2	14	86	10	14	102.2165
103	9.7	17	93	14	18	103.2394
1031	9.5	18	94	14	18	1031.1434
	9.5	18	94	15	20	1031.1420
104	10.0	20	98	16	21	104.2761
105	10.0	23	100	20	25	105.3248

Crimp ferrule, heat shrink tube and fixing lug are included and mounted.

Materials
Cap: Santoprene™ TPV 101-80
Cable: stainless steel with FEP-Teflon® covering
Fixing lug: anthracite plated brass (ISO CuZn37)




Caps are intermateable to provide additional dust protection.

NUT DRIVER FOR SLOTTED NUTS

NUT DRIVER WITH T-HANDLE AND HEX DRIVE

FOR DECORATIVE SLOTTED NUTS

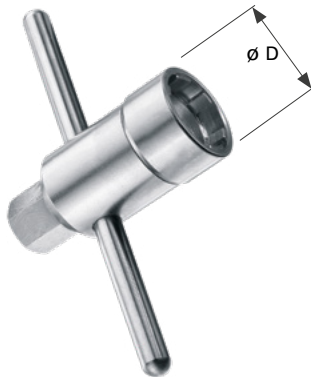

Thread size	D	 Part number
M9x0.5	15	TC00.000
M10x0.5	16	TC00.007
M14x1	21	TG00.001
M15x1	22	TK00.000
M16x1	23	TK00.002
M20x1	28	TP00.005

Material: hardened tool steel, nickel plated.

MECHANICAL & ENVIRONMENTAL DATA

Parameter	Value	Standard
Mating cycles	10,000	IEC 60512-9-1 EIA-364-09
Operating temperature range - Viton O-ring at plug interface - EPDM O-ring (Low temp) at plug interface	-20°C to +200°C -50°C to +160°C See details on page A-9 and B8-32	IEC 60068-2-14
Sealing	IP68 ; 2m submersion for 24 hours	IEC 60529
Hermeticity - DEE, DBPE, DBPLE	Hermetic: Tested: <10 ⁻⁹ mbar l/s IP69	IEC 60068-2-17 test Qk method 3, alternative b IEC 60529
Vibration	Contact interruption < 1µs (10-2000Hz/15G)	MIL-STD-202 Method 204, Condition B

ELECTRICAL DATA

Characteristic	Contact size	Typical values	Standard
Contact resistance 10,000 mating cycles	ø 0.5 mm ø 0.7 mm ø 0.9 mm ø 1.3 mm ø 1.6 mm ø 2.3 mm ø 3.0 mm	5.0 mΩ 5.0 mΩ 4.0 mΩ 2.5 mΩ 2.5 mΩ 2.5 mΩ 1.5 mΩ	IEC 60512-2-1, Test 2a IEC 60512-2-2, Test 2b
Insulation resistance		> 10 ¹⁰ Ω	IEC 60512-3-1-3a Method C

MATERIAL & SURFACE TREATMENTS

Metal Parts	Material				Finish	
	Designation	Standards			Designation	Standard
		ISO	UNS	EN		
Plug body, cable clamp, latching sleeve, nuts	Brass	CuZn39Pb3	–	CW614N UNS C 38500	Electroless nickel	SAE-AMS-QQ-N-290 / SAE-AMS2404
Plug housing, receptacle housing, slotted nut, clamp nut	Aluminum ¹⁾	AlMgSi1SnBi	–	AW-6023	Chrome over nickel	SAE-AMS2460
					Anthracite nickel	SAE-AMS-QQ-N-290 / SAE-AMS2404
					Sulfuric anodizing	MIL-A-8625
Grounding - Tag (solder and crimp contacts) - Pin (PCB contacts)	Brass Brass	CuZn39Pb3 CuZn39Pb3	C 38500 C 38500	– –	Electroless nickel Nickel + Flash Gold	SAE AMS 2404
Contacts - Male contacts - Female contacts	Brass Bronze	CuZn39Pb3 CuSn4Zn4Pb4	C 38500 C 54000	– –	Electroless nickel 1 µm Gold	MIL-DTL-45204D Type 1 + ASTM B488

¹⁾ Aluminum is not recommended for marine or corrosive environments. In this case, we recommend the Fischer Core Series Brass or Core Series Stainless Steel.

Insulator and sealing

Contact blocks and other insulators for our standard connectors are manufactured from high performance engineering plastic materials. The standard materials of each connector series are listed under Electrical & Contact configurations in pages B 8-12 through B 8-18. Ceramics and other dielectrics are available on special order.


Insulator and sealing	International symbol	Flammability
Insulator	PEEK	UL 94 V-O
Insulator	PTFE - PBT	-
Interface O-rings (receptacles)	FPM (Viton®) / EPDM	-
Sealant material - IP68 (receptacles) - Hermetic	Silicon compound Epoxy compound	UL 94 V-O UL 94 HB

Our products are RoHS compliant and conform with the EC Directives 2011/65/EU & 2015/863/EU.


OPERATING TEMPERATURES

The temperature ranges quoted by the manufacturers of the plastic materials are usually the absolute maximum values. When exposed to the mechanical and electrical stresses present in a connector, these values are often unrealistic. If a composite connector system including accessories is used,

then the item with the lowest temperature performance will dictate the operating temperature limit of the system. The table below shows our recommended operating temperature ranges.

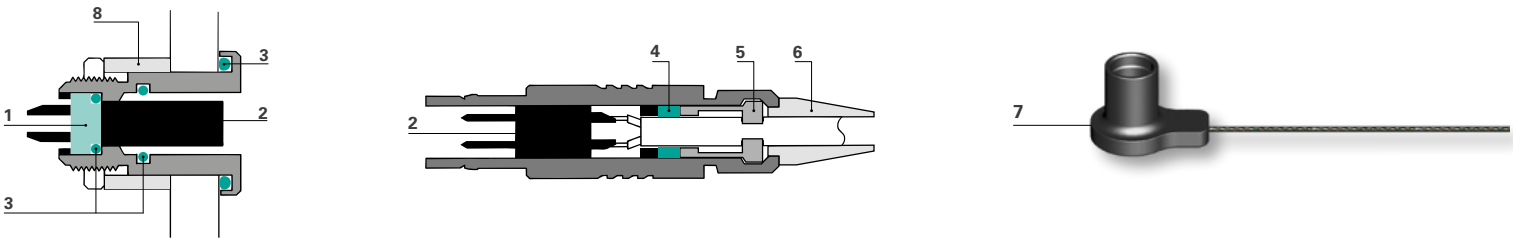

Ref.	Component	Material	
1	Sealant	"U" Type	
		"E" Type	
2	Insulator	PEEK	
		PTFE (Teflon®)	
		PBT	
3	Standard O-rings	FPM (Viton®)	
	Interface O-rings (option)	EPDM	
4	Cable clamp seal	TPE	
5	Cable clamp	Standard	Brass
		High Voltage Connectors	POM
6	Cable strain relief	TPE	
		VMQ - Silicone rubber	
7	Sealing caps	Soft caps	TPE
8	Panel spacer		

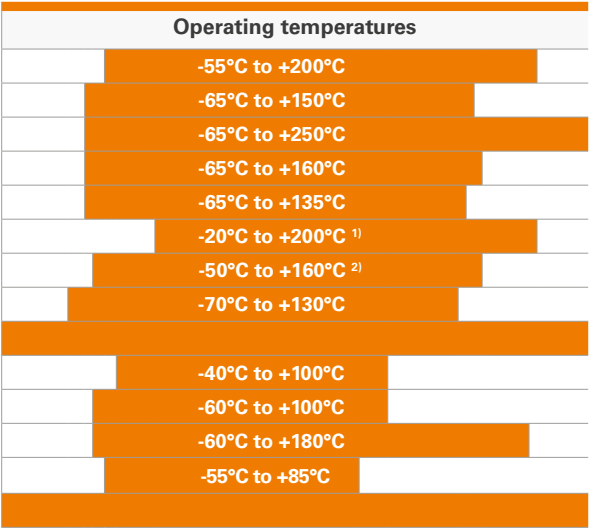


¹⁾ Minimum mating temperature: 0°C.
²⁾ Minimum mating temperature: -20°C.



B9

CHAPTER

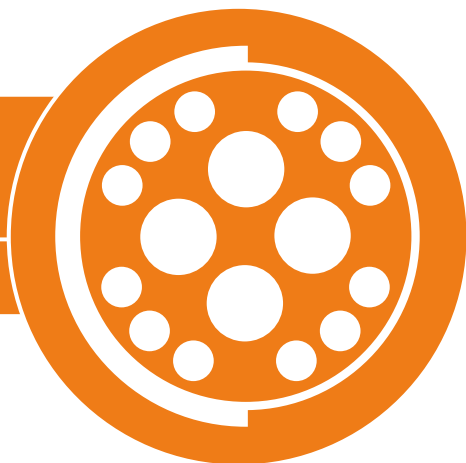

FISCHER CORE SERIES PLASTIC

EASY TO USE | DURABLE | LIGHTWEIGHT

KEY FEATURES

- Sealed up to IP68
- Over 5,000 mating cycles
- Resistant to large temperature variations
- Color coding for easy operation



PLASTIC 405

PLUGS



CABLE MOUNTED

- Body styles (S/SI 405)..... B9-3
- Technical dimensions B9-4

RECEPTACLE



PANEL MOUNTED

- Body styles (DBP 405)..... B9-3
- Technical dimensions B9-4

FOR ALL PLASTIC 405

- Part numbering..... B9-5
- Electrical & contact configurations..... B9-6
- PCB hole pattern and pin layout..... B9-7
- Accessories..... B9-8
- Technical information..... B9-10
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

Body styles selection

FISCHER CORE SERIES **PLASTIC**

PLUGS

CABLE MOUNTED



BODY STYLES	S 405	SI 405
Locking system	Push-pull	Push-pull
Sealing	IP50/IP67	IP50/IP67
Design	Standard	Standard
Integral shielding	Yes	No


RECEPTACLE

PANEL MOUNTED



BODY STYLE	DBP 405
Sealing	IP50
Design	Standard

COMPATIBILITY

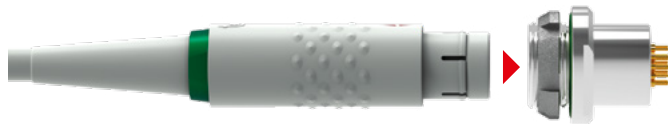


Mateable with all high performance Fischer Connectors' panel receptacles of the Fischer Core Series Brass 105.



All dimensions and images shown are in millimeters and are for reference only.

PLUGS**CABLE**
MOUNTED**S/SI 405**

BODY STYLES

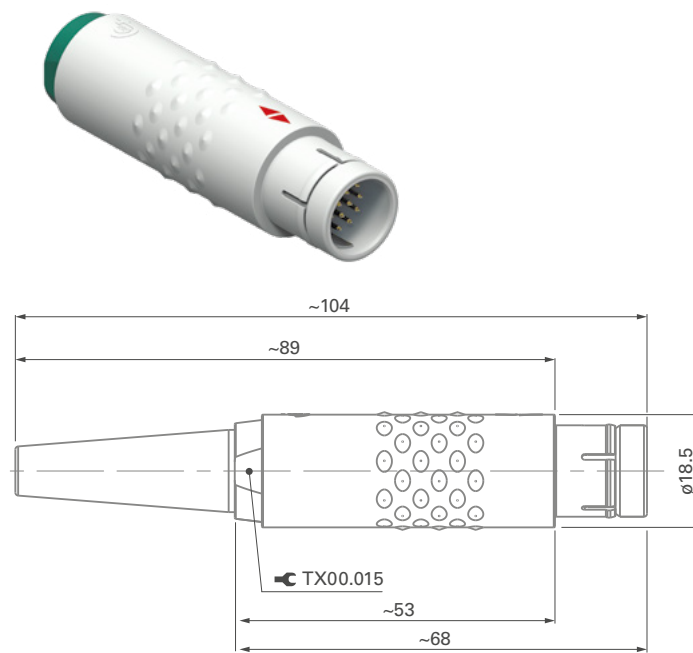**RECEPTACLE****PANEL**
MOUNTED**DBP 405**

BODY STYLE

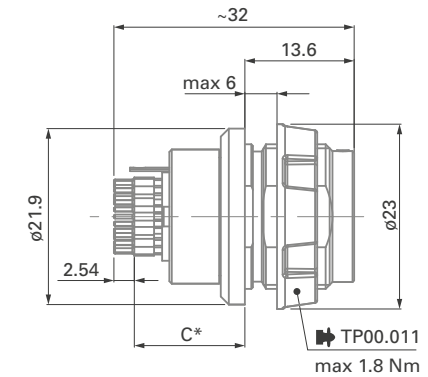PANEL CUT-OUT
Figure 1

* See contact configurations page B9-6.

PLASTIC 405

					Standard options					
Example:	S	405	A	087	-	B	3	L	2	R
Body style										
S = Plug, with integral shielding SI = Plug, without integral shielding DBP = Receptacle, rear panel mounted										
Series										
405										
Contact polarity										
A = Plugs have male contacts. Receptacles have female contacts. Z = Plugs have female contacts. Receptacles have male contacts.										
Contact configuration										
See page B9-6										
Body color										
B = Beige C = Anthracite										
Insulator material										
3 = PEEK										
Contact type										
J = Solder K = Crimp L = PCB										
Color coding										
2 = Anthracite 3 = Green 4 = Blue 5 = Yellow 8 = Beige										
Bend relief material										
R = None S = Silicone (6.5 dia.) T = TPE (6.5 dia.) U = Silicone (3.5 dia.) W = TPE (3.5 dia.)										


PLASTIC 405

Figure 1

References	Pin layout	Number of contacts		Contact types			Insulating material	Contact ø [mm]	Wire size		PCB	C (mm) see Figure 1	Test voltage [kV] in mated position				Current ¹⁾ [A]
				Solder	Crimp	PCB			Solder contacts	Crimp contacts			AC r.m.s		DC		
													Contact to body	Contact to contact	Contact to body	Contact to contact	
405 ^A _Z 087		2	●	-	-	PEEK	3.0	max ø3.13mm AWG9 [1] / AWG10 [105/30]	-	-	-	-	1.2	1.6	2.3	3.0	30
405 ^A _Z 052		3	●	-	-	PEEK	2.0	max ø2.03mm AWG13 [1] / AWG14 [7/22]	-	-	-	-	2.0	2.5	3.0	3.5	23
405 ^A _Z 054		1	●	-	-	PEEK	2.0	max ø2.03mm AWG13 [1] / AWG14 [7/22]	-	-	-	-	3.0	2.0	4.0	3.0	25
		6					1.3	max ø1.18mm AWG17 [1] / AWG18 [16/30]	-	-	-	-	1.8	1.5	2.5	2.0	7.0
405 ^A _Z 101		1	●	-	●	PEEK	2.0	max ø2.03mm AWG13 [1] / AWG14 [7/22]	-	A: 0.50 Z: -	A: 10.8 Z: -	3.0	2.0	4.0	3.0	25	
		8					1.3	max ø1.18mm AWG17 [1] / AWG18 [16/30]	-	A: 0.50 Z: -	A: 10.8 Z: -	1.8	1.5	2.5	2.0	5.0	
405 ^A _Z 069		12	●	-	●	PEEK	1.3	max ø1.18mm AWG17 [1] / AWG18 [16/30]	-	A: 0.50 Z: -	A: 13.8 Z: -	1.4	1.5	1.8	2.0	8.0	
405 ^A _Z 104		3	●	-	●	PEEK	1.3	max ø1.18mm AWG17 [1] / AWG18 [16/30]	-	A: 0.50 Z: -	A: 13.8 Z: -	2.5	1.5	3.8	2.2	14	
		10					0.7	max ø0.79mm AWG21 [1] / AWG22 [7/30]	-	A: 0.50 Z: -	A: 13.8 Z: -	1.3	1.5	1.8	2.2	1.0	
405 ^A _Z 110		4	●	-	●	PEEK	1.6	max ø1.86mm AWG13 [1] / AWG14 [7/22]	-	A: 0.50 Z: -	A: 13.8 Z: -	1.6	1.3	2.8	2.1	14	
		12					0.7	max ø0.79mm AWG21 [1] / AWG22 [7/30]	-	A: 0.50 Z: -	A: 13.8 Z: -	1.0	1.2	1.5	2.0	1.0	
405 ^A _Z 038		18	●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] / AWG22 [7/30]	max ø0.83mm min ø0.38mm AWG22-26	A: 0.50 Z: -	A: 13.3 Z: -	1.4	1.6	1.8	2.2	4.5	
405 ^A _Z 102		27	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] / AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	A: 0.50 Z: -	A: 13.8 Z: -	1.2	1.5	1.5	2.0	3.0	

¹⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.

PCB LAYOUT


S/SI 405

DBP 405

BODY STYLES



Minimum clearance for ground lug of receptacle.



View from F - Number of contacts (reference)

Polarity	2 (087)	3 (052)	7 (054)	9 (101)	12 (069)
A					
Z					

Polarity	13 (104)	16 (110)	18 (038)	27 (102)
A				
Z			-	

All dimensions and images shown are in millimeters and are for reference only.

CABLE CLAMP SETS**UNSHIELDED**

Cable Ø range (mm)	Use with PEEK Insulators
2.5 - 3.5	E3 105.6/3.5
3.5 - 4.5	E3 105.6/4.5
4.5 - 5.5	E3 105.6/5.5
5.5 - 6.5	E3 105.6/6.5
6.5 - 7.5	E3 105.6/7.5
7.5 - 8.5	E3 105.6/8.5
8.5 - 9.5	E3 105.6/9.5
9.5 - 10.5	E3 105.6/10.5

For use with unshielded cable or when shield is not carried through connector body.

SHIELDED

Cable Ø range (mm)	Use with PEEK insulators
3.2 - 4.2	E3 105.1/4.2 + B
4.2 - 5.2	E3 105.1/5.2 + B
5.2 - 6.2	E3 105.1/6.2 + B
6.2 - 7.2	E3 105.1/7.2 + B
7.2 - 8.2	E3 105.1/8.2 + B
8.2 - 9.2	E3 105.1/9.2 + B
9.2 - 10.0	E3 105.1/10.0 + B
10.0 - 10.7	E3 105.1/10.7 + B

For use with shielded cable when shield is to be carried through connector body.


ENVIRONMENTAL

Cable Ø range (mm)	Use with PEEK insulators
3.2 - 4.2	E31 105.2/4.2 + B
4.2 - 5.2	E31 105.2/5.2 + B
5.2 - 6.2	E31 105.2/6.2 + B
6.2 - 7.2	E31 105.2/7.2 + B
7.2 - 8.2	E31 105.2/8.2 + B
8.2 - 9.2	E31 105.2/9.2 + B
9.2 - 10.0	E31 105.2/10.0 + B
10.0 - 10.7	E31 105.2/10.7 + B

For use when sealing shielded or unshielded cable to plug body.

SEALING CAPS

FOR PLUGS

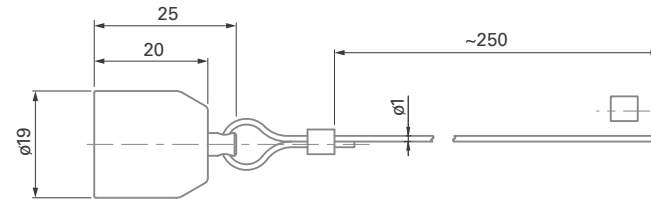

Part number	Cap material	Stainless steel cable covering material
105.2741 (Black)	PEI	FEP –Teflon®

Crimp ferrule (300.637) is included.

To attach the crimp ferrule to the stainless steel cable, use a crimp tool, a vice or a pair of pliers with parallel jaws. There are no specific Fischer Connectors tools.

ENVIRONMENTAL & MECHANICAL DATA

Characteristic	Product type		Value
Sealing performance	Plug (S or SI 405)	with sealed cable clamp set and cap	IP67
			IP50
	Receptacle (DBP 405)		IP50
Endurance	5,000 mating cycles		

OPERATING TEMPERATURE RANGE

Component	Material	Operating temperatures	
Body	PEI	-65°C to +200°C	
Insulator	PEEK	-65°C to +250°C	
Plastic Cable Clamp	POM (Delrin®)	-40°C to +100°C	
Cable clamp seal	TPE	-70°C to +130°C	
Cable strain relief	TPE	-60°C to +100°C	
	VMQ - Silicone rubber	-60°C to +180°C	
Sealing cap	PEI with FPM O-ring	-20°C to +200°C	
		TEMPERATURE °C	0°C

MATERIAL & SURFACE TREATMENTS

Metal parts

Parts		Material			Finish	
		Designation	ISO	Standard	Designation	Standard
Metal parts (except contacts), inner body shell of S plug		Brass	CuZn39Pb3	CW614N UNS C 38500	Nickel	SAE-AMS-QQ-N-290 SAE-AMS2404
Contacts	Male (solder)	Brass	CuZn39Pb3	CW614N UNS C 38500	1 µm Gold over Nickel	MIL-DTL-45204D Type 1 + ASTM B488
	Female, male (crimp)	Bronze	CuSn4Zn4Pb4	CW456K ASTM B 139, UNS C 54400		

Plastic Parts

Parts	International symbol	Flammability
Body shell, sealing cap, back nut, mounting nut	PEI	UL 94 V-O
Insulator	PEEK - PTFE	UL 94 V-O
O-ring in sealing cap	FPM (Viton®)	-
Plastic cable clamps	POM (Delrin®)	UL 94 HB
Bend relief	TPE-S - VMQ - Silicone Rubber	UL 94 HB

PLASTIC 4032

PLUG



CABLE MOUNTED

- Body styles (SI 4032) B9-13
- Technical dimensions B9-14

RECEPTACLES



PANEL MOUNTED

- Body style (DBP/DBPO 4032) B9-13
- Technical dimensions B9-14

FOR ALL PLASTIC 4032

- Part numbering B9-15
- Electrical & contact configurations B9-16
- PCB hole pattern and pin layout B9-17
- Accessories B9-18
- Technical information B9-20
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

Body style selection

FISCHER CORE SERIES **PLASTIC**

PLUG

CABLE MOUNTED



BODY STYLE	SI 4032
Locking system	Push-pull
Sealing	P50/IP68 with cap or mated with DBPO
Design	Standard
Integral shielding	No

RECEPTACLES

PANEL MOUNTED




BODY STYLES	DBP 4032	DBPO 4032
Sealing	IP50	IP68
Design	Standard	Standard

PLASTIC

PLUG**CABLE**
MOUNTED**SI 4032**

BODY STYLE

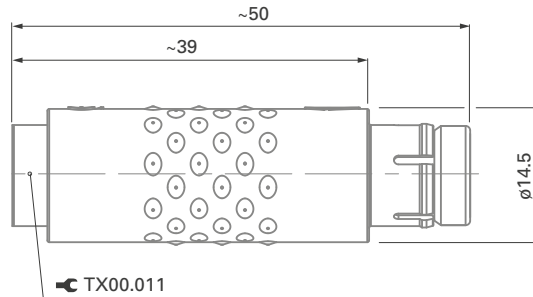**RECEPTACLES****PANEL**
MOUNTED**DBP / DBPO 4032**

BODY STYLES



PANEL CUT-OUT






Figure 1

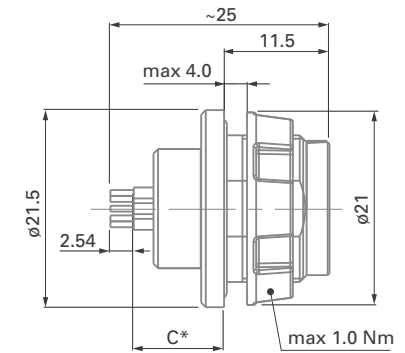

* See contact configurations page B9-16.

PLASTIC 4032

	Housing design					Standard options				
Example:	SI	4032	A	051	-	D	3	L	1	R
Body style										
Plug = SI Receptacle, rear panel mounted = DBP Receptacle, rear panel mounted, sealed when mated (IP68) = DBPO										
Series										
4032										
Contact polarity										
Plugs have male contacts. Receptacles have female contacts = A Plugs have female contacts. Receptacles have male contacts. = Z										
Contact configuration										
See page B9-16										
Body material										
PBT = D										
Insulator material										
PEEK = 3										
Contact type										
Solder = J Crimp = K PCB = L										
Color coding										
White = 1 Black = 2 Green = 3 Blue = 4 Yellow = 5 Red = 6 Grey = 7										
Bend relief material										
None = R										

PLASTIC 4032

References	Pin layout	Number of contacts	Contact types			Insulating material	Contact $\varnothing$ [mm]	Wire size		PCB	C [mm] see Figure 1	Test voltage [kV] in mated position				Current ¹⁾ [A]
			Solder	Crimp	PCB			Solder contacts	Crimp contacts			AC r.m.s		DC		
												Contact to body	Contact to contact	Contact to body	Contact to contact	
4032 $\frac{A}{Z}$ 051		2	●	●	-	PEEK	1.3	max $\varnothing$ 1.18mm AWG17 [1] AWG18 [16/30]	max $\varnothing$ 1.18mm min $\varnothing$ 0.58mm AWG18-24	-	-	1.5	2.2	2.2	3.0	13
4032 $\frac{A}{Z}$ 052		3	●	-	-	PEEK	1.3	max $\varnothing$ 1.18mm AWG17 [1] AWG18 [16/30]	-	-	-	1.2	1.5	1.8	2.0	12
4032 $\frac{A}{Z}$ 053		4	●	-	●	PEEK	0.9	max $\varnothing$ 0.79mm AWG21 [1] AWG22 [7/30]	-	A: 0.63 Z: 0.63	A: 9.9 Z: 10.0	1.2	1.6	2.0	2.4	7.0
4032 $\frac{A}{Z}$ 054		5	●	●	●	PEEK	0.9	max $\varnothing$ 0.79mm AWG21 [1] AWG22 [7/30]	max $\varnothing$ 0.83mm min $\varnothing$ 0.48mm AWG22-26	A: 0.63 Z: -	A: 9.9 Z: -	1.1	1.4	1.9	2.2	6.8
4032 $\frac{A}{Z}$ 056		6	●	●	-	PEEK	0.7	max $\varnothing$ 0.79mm AWG21 [1] AWG22 [7/30]	max $\varnothing$ 0.62mm min $\varnothing$ 0.38mm AWG24-28	-	-	1.0	1.3	2.0	2.0	5.2
4032 $\frac{A}{Z}$ 057		7	●	●	-	PEEK	0.7	max $\varnothing$ 0.79mm AWG21 [1] AWG22 [7/30]	max $\varnothing$ 0.62mm min $\varnothing$ 0.38mm AWG24-28	-	-	1.0	1.3	2.0	2.0	5.0
4032 $\frac{A}{Z}$ 010		10	●	●	●	PEEK	0.7	max $\varnothing$ 0.79mm AWG21 [1] AWG22 [7/30]	max $\varnothing$ 0.62mm min $\varnothing$ 0.38mm AWG24-28	A: 0.50 Z: -	A: 8.9 Z: -	1.4	1.5	2.0	2.2	4.5
4032 $\frac{A}{Z}$ 012		12	●	●	●	PEEK	0.7	max $\varnothing$ 0.79mm AWG21 [1] AWG22 [7/30]	max $\varnothing$ 0.62mm min $\varnothing$ 0.38mm AWG24-28	A: 0.50 Z: -	A: 8.9 Z: -	1.4	1.5	2.0	2.2	4.2
4032 $\frac{A}{Z}$ 019		19	●	●	●	PEEK	0.5	max $\varnothing$ 0.43mm AWG26 [1] AWG28 [19/40]	max $\varnothing$ 0.43mm min $\varnothing$ 0.20mm AWG28-32	A: 0.40 Z: -	A: 8.9 Z: -	1.2	0.9	2.0	1.5	2.5

¹⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.

PCB LAYOUT

SI 4032

DBP/DBPO 4032

BODY STYLES



View from F - Number of contacts (reference)


Polarity	2 (051)	3 (052)	4 (053)	5 (054)	6 (056)
A					
Z					

Polarity	7 (057)	10 (010)	12 (012)	19 (019)
A				
Z				

All dimensions and images shown are in millimeters and are for reference only.

SEALING CAPS



FOR PLUGS

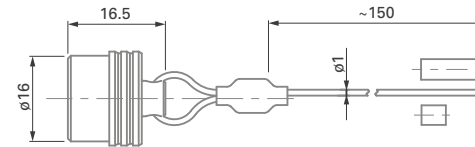

Part number	Cap Material	Stainless steel cable covering material
4032.703	POM (Delrin®)	FEP –Teflon®

Crimp ferrule (300.922) and heat shrink tube (300.930) are included.

FOR RECEPTACLES

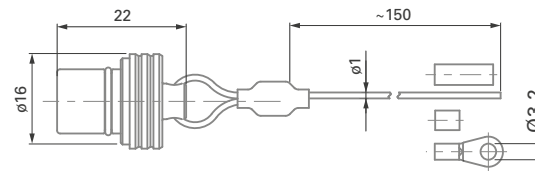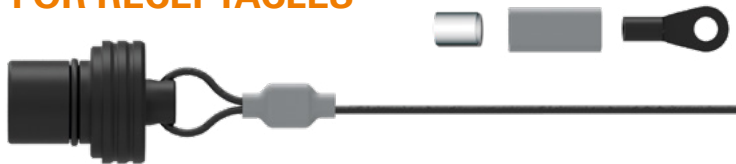

Part number	Cap Material	Stainless steel cable covering material
4032.701	POM (Delrin®)	FEP –Teflon®

Crimp ferrule (300.922), crimp lug (300.299) and heat shrink tube (300.930) are included.

To attach the crimp ferrule or the crimp lug to the stainless steel cable, use a crimp tool, a vice or a pair of pliers with parallel jaws. See page B6-22 for recommended crimping tool for ferrule.

CABLE CLAMP SETS

UNSHIELDED

Cable O.D. (mm)	Part number
2.2 - 3.7	4032.1003
3.7 - 5.2	4032.1002
5.2 - 6.7	4032.1001

For unshielded and unsealed applications.


CABLE CLAMP SETS

ENVIRONMENTAL

Cable O.D. (mm)	Part number
2.2 - 2.7	E3 1031.2/2.7
2.7 - 3.2	E3 1031.2/3.2
3.2 - 3.7	E3 1031.2/3.7
3.7 - 4.2	E3 1031.2/4.2
4.2 - 4.7	E3 1031.2/4.7
4.7 - 5.2	E3 1031.2/5.2
5.2 - 5.7	E3 1031.2/5.7
5.7 - 6.2	E3 1031.2/6.2
6.2 - 6.7	E3 1031.2/6.7

For use when sealing shielded or unshielded cable to plug body.

TOOLING - 4032 - NUT DRIVER



Part number	Cap material
TH00.001	ABS

All dimensions and images shown are in millimeters and are for reference only.

ENVIRONMENTAL & MECHANICAL DATA

Characteristic	Product type		Value
Sealing performance	SI plug	- with sealed cable clamp - with cap or mated with DBPO	IP68
			IP50
	DBPO receptacle	Mated with sealed plug or with cap	IP68
	DBP receptacle		IP50
Endurance	5,000 mating cycles		

OPERATING TEMPERATURE RANGE

Component	Material	Operating temperatures
Body	PBT	-65°C to +135°C
Insulator	PEEK	-65°C to +250°C
O-rings - receptacle	NBR	-30°C to +110°C
Unshielded cable clamp	POM (Delrin®)	-40°C to +100°C
Cable clamp seal	TPE	-70°C to +130°C
Sealing cap for plug	POM (Delrin®) with O-ring	-60°C to +100°C
Sealing cap receptacle	POM (Delrin®) with NBR O-ring	-20°C to +100°C

0°C

TEMPERATURE °C

METAL PARTS


Parts		Material			Finish	
		Designation	ISO	Standard	Designation	Standard
Metal parts (except contacts)		Brass	CuZn39Pb3	CW614N UNS C 38500	Nickel	SAE-AMS-QQ-N-290 SAE-AMS2404
Contacts	Male (solder)	Brass	CuZn39Pb3	CW614N UNS C 38500	1 µm gold over nickel	MIL-DTL-45204D Type 1 + ASTM B488
	Female, male (crimp)	Bronze	CuSn4Zn4Pb4	CW456K ASTM B 139, UNS C 54400		

INSULATOR & SEALING

Parts	International symbol	Flammability
Body shell, sealing cap, back nut, mounting nut	PBT	UL 94 HB
Insulator	PEEK	UL 94 V-O
O-rings on receptacles and sealing caps for receptacles	NBR	-
O-ring on sealing cap for plug	FPM (Viton®)	-
Unshielded cable clamps, sealing cap bodies	POM (Delrin®)	UL 94 HB

B10

CHAPTER

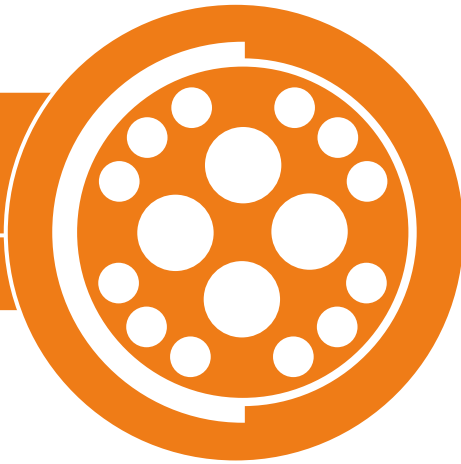

FISCHER CORE SERIES DISPOSABLE

COST-EFFECTIVE | EASY TO USE | MODULAR

KEY FEATURES

- Sterilizable (EtO), gamma
- Single or two-piece shell
- Color-coded for easy integration
- Lightweight and shock resistant



DISPOSABLE

PLUGS



CABLE MOUNTED **TWO-PIECE** SHELL

- Body styles B 10-3
- Technical dimensions B 10-4



CABLE MOUNTED **SINGLE** SHELL

- Body styles B 10-3
- Technical dimensions B 10-5



PRE-CABLED SOLUTION

- Body styles B 10-3
- Technical dimensions B 10-5

FOR ALL DISPOSABLE

- Electrical & contact configurations B 10-6
- Technical information B 10-8
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

PLUGS

CABLE MOUNTED

**WHITE****BLUE****VIOLET****TURQUOISE****BODY STYLES**

Locking system	Friction	Friction	Friction	Friction
Sealing	IP30/IP40	IP40	IP40	IP40
Design	Single/Two-piece shell	Two-piece shell	Two-piece shell	Two-piece shell

PRE-CABLED SOLUTION

**BODY STYLES**

Locking system	Friction
Sealing	IP65
Design	Turnkey

COMPATIBILITY




Mateable with all high performance Fischer Connectors' panel receptacles of the Fischer Core Series Brass 104.

PLUGS


TWO-PIECE SHELL

WHITE* BLUE VIOLET TURQUOISE

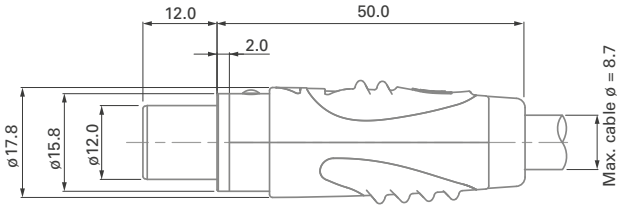


Part	Part number	Description
Interface	U1 504-A	Interface white
Top shell	U31 504-B01	White top shell
	U31 504-A03	White top shell + blue soft touch
	U31 504-A04	White top shell + violet soft touch
	U31 504-A09	White top shell + turquoise soft touch
Bottom shell	U32 504-B01	White bottom shell
	U32 504-A03	White bottom shell + blue soft touch
	U32 504-A04	White bottom shell + violet soft touch
	U32 504-A09	White bottom shell + turquoise soft touch
Ferrule	U33 504/5.0	Ferrule Dia 5.0 for two-piece shell version
Bend relief	U34 504-A03	Blue
	U34 504-A04	Violet
	U34 504-A09	Turquoise

* Assembled with color bend relief.

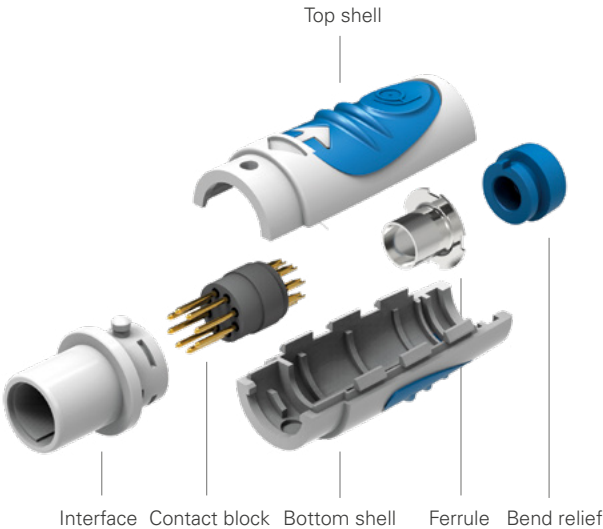


PLUGS

SINGLE SHELL WHITE

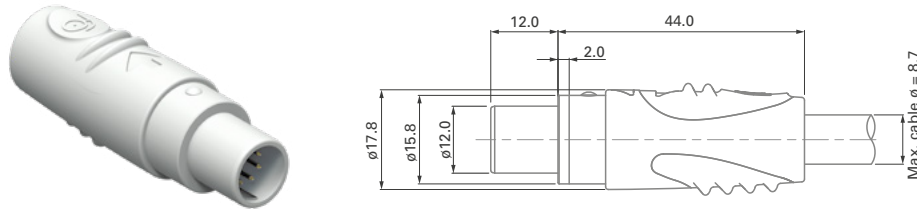


Part	Part number	Description
Interface	U1 504-A	Interface white
Single shell	U41 504-A	One-piece shell, white only
Ferrule	U42 504/5.0	Ferrule Dia 5.0 for single shell version

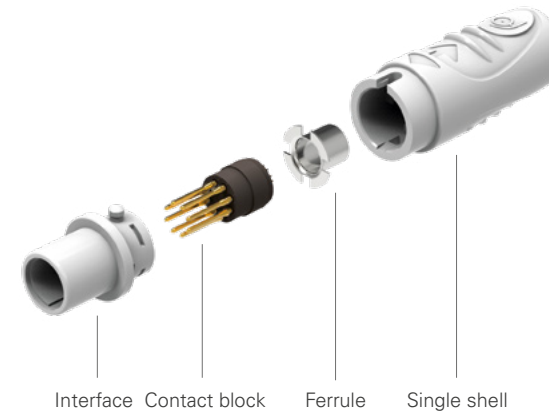

PLUGS

DISPOSABLE CABLE SOLUTION ON DEMAND



SINGLE OR TWO-PIECE SHELL

References	Pin layout	Number of contacts		Insulating material	Contact $\varnothing$ [mm]	Wire size	Test Voltage [kV] in mated position				Max. admissible current ¹⁾ [A] at 10°C temperature rise	Contact block insulator
							AC rms		DC			
							Contact to receptacle body	Contact to contact	Contact to receptacle body	Contact to contact		
A 037		4		PBT	1.3	AWG18 [16/30]	1.8	2.2	2.5	3.0	-	E21 504 A037-J
A 087		4	2 2	PBT	2.3	AWG12 [7/20]	1.5	1.6	2.2	2.5	-	E21 504 A087-J
					0.9	AWG22 [7/30]	2.0		2.8		-	
A 066		8		PBT	0.9	AWG22 [7/30]	1.5	1.6	2.2	2.7	3.0	E21 504 A066-J
A 056		11		PBT	0.9	AWG22 [7/30]	1.4	1.5	2.1	2.2	-	E21 504 A056-J
A 086		16		PBT	0.7	AWG22 [7/30]	0.8	1.5	1.3	2.1	1.7	E21 504 A086-J
A 092		19		PBT	0.7	AWG22 [7/30]	0.8	1.2	1.2	1.8	-	E21 504 A092-J

¹⁾ Current per contact at 10°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.

SINGLE OR TWO-PIECE SHELL

MECHANICAL & ENVIRONMENTAL DATA

Sealing rating – Single shell – Two-piece shell	IP30 IP40
Operating temperature range	-20°C to +65°C
Endurance	10 mating cycles
Gamma irradiation for sterilization	Tested to withstand irradiation up to 60 kGy per ISO 11137-2
EtO for sterilization	Tested with a standard EtO sterilization cycle per ISO 11135
Mating / Unmating force	Typ. 10-20 N

MATERIAL & SURFACE TREATMENTS

Parts	Material	Surface treatment	Flammability
Plastic housing	ABS	–	UL 94 HB
Soft-touch areas	TPE	–	UL 94 HB
Contacts	Brass or Bronze	Gold over Nickel	–
Insulator	PBT	–	UL 94 V-0
Ferrule	Copper alloy	Nickel	–

All dimensions and images shown are in millimeters and are for reference only.

A GLOBAL PARTNER IN CONNECTIVITY



A pioneer in high-reliability and rugged connector technology, **Fischer Connectors** has kept the spirit of innovation alive for more than 60 years. Since 1954, it has been reimagining connectivity, turning its customers' challenges into success stories through breakthrough technologies, high-quality products and highly responsive customer service.

Fischer Connectors helps its customers around the world produce innovative and reliable applications by designing, manufacturing and distributing high-performance, rugged connectivity solutions that withstand the most demanding environments. Its high-quality solutions are particularly suited to applications requiring faultless precision, durability and resistance to extreme conditions, including defense and security, medical, industrial, instrumentation, audiovisual, transportation, and energy.

Headquartered in Saint-Prex, Switzerland (Canton of Vaud), where its R&D Center and manufacturing facilities are also located, the Fischer Connectors Group has cable assembly sites in EMEA, the United States and Asia. The Group also includes local subsidiaries and a wide network of distributors and agents all over the world.

« Since 1954, we have grown from a provider of connectors to a global partner in connectivity for our customers. We have expanded to meet market demand, providing a range of tailored connectivity solutions that not only meet our customers' needs, but that also have the potential to shape the future. Thank you for joining us on this adventure to reimagine connectivity, together. »

Jonathan Brossard, Group CEO

WARRANTY & DISCLAIMER

Save as expressly provided otherwise, any technical data provided by Fischer Connectors in this document, in hardcopy or electronic form, shall be provided for information purposes only. In no event may Fischer Connectors be bound by or liable (including in case of errors) for any technical data contained in this document, in hardcopy or electronic form, unless such technical data is expressly guaranteed by Fischer Connectors.

The values provided in this document are measured under standard environmental conditions. Applications in non-standard environmental conditions may require additional testing and values may vary from those listed.

Fischer Connectors shall not be liable for damages to the products or services resulting from assembly process, installation or testing performed by the purchaser or any third party upon the purchaser's request, or damages due to other action or process performed on the products or services by the purchaser or any third party upon the purchaser's request which fails to comply with Fischer Connectors' instructions or which are otherwise beyond Fischer Connectors' control. Fischer Connectors shall not be liable for any defect or failure of Fischer Connectors' products or services which operate in accordance with specifications, illustrations, descriptions or other particulars due to combination or use of Fischer Connectors' products or services with any incompatible equipment or product of a third party.

Refer to www.fischerconnectors.com for the General Terms and Conditions of Fischer Connectors.

ISO 9001

ISO 13485

ISO 14001

ISO 45001

NUCLEAR
KTA 1401 - QN 100

REACH
compliant

ROHS
compliant

SONY
green partner

UPDATES

Date	Version	Page	Update
06.2023	3.5	B1-10	Addition of configurations 1031-15, 1031-29, 104-104
06.2023	3.5	B2-29, B2-31	Addition of configurations 1031-15, 1031-29, 104-104
06.2023	3.5	B7-24	Stainless steel caps for receptacles: correction of part numbers
09.2023	3.6	B1-10, B1-11	Addition of configurations 1031-105, 104-130, 104-131, 104-135
09.2023	3.6	B2-29 - B2-33	Addition of configurations 1031-105, 104-130, 104-131, 104-135
09.2023	3.6	B10-5	Modifications to the Cable Solutions section
09.2023	3.6	B10-6	Table modifications, addition of references A 37 and A 87
10.2023	3.7	B2-29 - B2-33	Adding data for configurations 1031-105, 104-130, 104-131, 104-135
02.2024	3.8	B3-6	New remark about the availability of the WSO body style.
02.2024	3.8	B2-28, B7-13, B8-13	Modification of contact type for configuration 103-062
02.2024	3.8	B9-12 - B9-14	Correction on body style plug designation
07.2024	4.0		Introduction of new contact layout USB3.2 Gen 2.
08.2024	4.1		Changes in product finish (Nickel Anthracite/Black Chrome over nickel)
11.2024	4.2	B2-4, B2-8, B2-28, B6-8, B6-15, B9-9	Values corrections
12.2024	4.3	B2-31, B2-37, B8-14, B8-16	Tables modifications
01.2025	4.4	A-14	Text corrections
03.2025	4.5	B6-24, B8-8, B8-10	Text corrections
05.2025	4.6	B1-6, B3-10, B3-33	Values corrections
05.2025	4.6	A-21	Map update
10.2025	4.7	B1-14, B7-28, B8-31	Directives updates
10.2025	4.7	B6-18	Material
10.2025	4.7	B7-30	Sealing caps temperatures
05.2026	4.8	A-14, B7-18, B7-19, B7-20, B9-17, B10-6	Misc. corrections

TECHNICAL SPECIFICATIONS

VOLUME 1

- BRASS
- STAINLESS STEEL
- ALULITE
- PLASTIC
- DISPOSABLE



VOLUME 1

BRASS- STAINLESS STEEL- ALULITE
PLASTIC- DISPOSABLE

TECHNICAL SPECIFICATIONS

VOLUME 2

- ULTIMATE
- FIBEROPTIC
- MINIMAX



VOLUME 2

ULTIMATE- FIBEROPTIC- MINIMAX



Technical & Downloads

Headquarters

FISCHER CONNECTORS SA
Ch. du Glapin 20
1162 Saint-Prex - Switzerland
Phone +41 21 800 95 95
Free phone +41 800 800 008
www.fischerconnectors.com
mail@fischerconnectors.ch

United States, Canada & South America

FISCHER CONNECTORS, Inc.
Atlanta, GA
Phone +1 678 393 5400
Toll free : 800 551 0121
www.fischerconnectors.com/us
mail@fischerconnectors.com

France

FISCHER CONNECTORS Sarl
Chanteloup-en-Brie
Phone +33 1 5578 2578
Appel gratuit: 0 800 590 444
www.fischerconnectors.fr
mail@fischerconnectors.fr

Germany, Austria & Eastern Europe

FISCHER CONNECTORS GmbH
Zorneding
Phone +49 8106 37722 0
Gebührenfrei: 0 800 233 3233
www.fischerconnectors.de
mail@fischerconnectors.de

Italy

FISCHER CONNECTORS Srl
Monza
Phone +39 039 734 072
www.fischerconnectors.it
mail@fischerconnectors.it

United Kingdom & Ireland

FISCHER CONNECTORS Ltd.
Waterlooville, Hampshire
Phone +44 23 9245 9600
Toll free: 0 800 432 0301
www.fischerconnectors.co.uk
sales@fischerconnectors.co.uk

India

FISCHER CONNECTORS India Pvt. Ltd.
504 GF& FF , Pace City 2
Sector 37
Gurugram 122004
Haryana
Phone +91 (0)124 5063725
www.fischerconnectors.com
salesin@fischerconnectors.in

Asia

FISCHER CONNECTORS ASIA Ltd.
Hong Kong
Phone +852 2620 6118
www.fischerconnectors.hk
mail@fischerconnectors.hk

Japan

FISCHER CONNECTORS K.K
Tokyo
Phone +81 70 1056 6637
www.fischerconnectors.jp
mail@fischerconnectors.jp

