




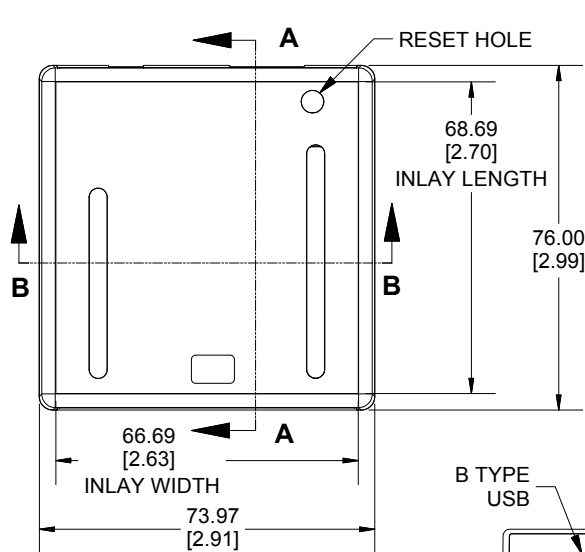


TOP VIEW

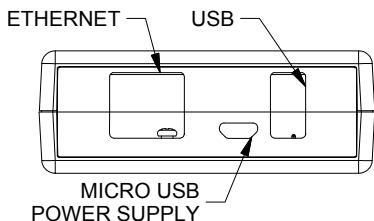


YUN FRONT VIEW

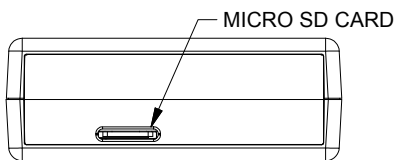


YUN BACK VIEW

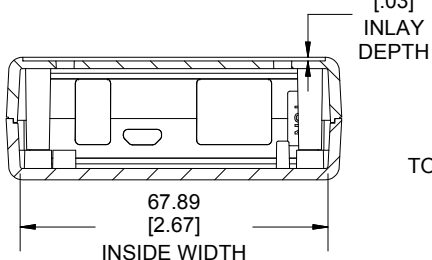


SECTION B-B

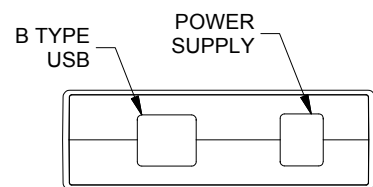

UNO PANEL

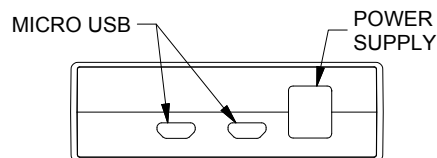


**LEONARDO /
M0 PRO
PANEL**




**BACK COVER
PANEL**

NOTE:
PANELS CAN BE SWAPPED OUT
TO ACCOMMODATE ARDUINO BOARDS
(LEONARDO, YUN, UNO, M0 PRO)

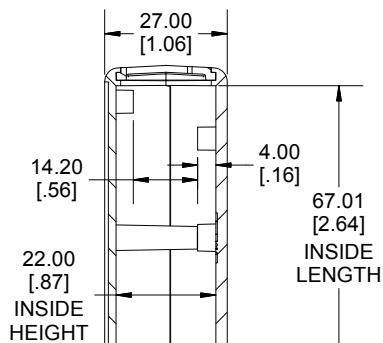


SECTION A-A

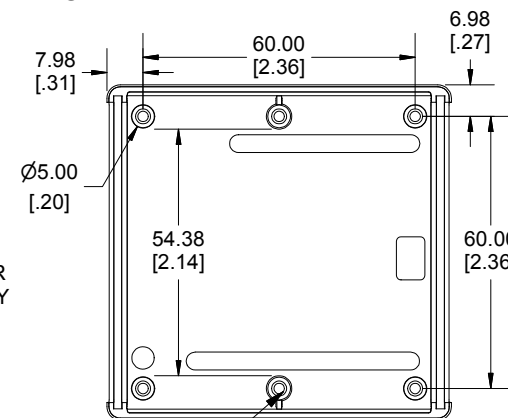

INSIDE TOP

ACCEPTS #4
SELF-TAPPING
SCREW



INSIDE BOTTOM

ACCEPTS M2.6
SELF-TAPPING
SCREW

Dimensions:
mm
[inches]



Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.

NOTE

Purchased assembly includes top and bottom cover, 3 front panels (work with Arduino YUN, UNO, Leonardo / M0 PRO), 2 rear Panels (one blank and one that work with YUN micro SD card), 2 cover screws, 2 screws to secure Arduino board and 4 rubber feet.

Recommended Cover Screw Torque - 57lbf-in (40cN-m)

PART NUMBERS

1593HAMAR		
Black Enclosure		1593HAMARBK
Grey Enclosure		1593HAMARGY
Translucent Blue Enclosure		1593HAMARTBU
ACCESSORIES		
Cover Screws #4 X 1/2" Self-Tapping (100 Pkg)		1591TS100
P.C. Board Screws M2.6 X 6mm Self-Tapping		1591TS100BK (Black)
Clear Rubber Feet (Pkg 24)		SC519-50 (Pkg 50)
Arduino Panels	Color	-
1593AR STD CONTOURED PANEL (SINGLE PANEL)	Translucent Blue	1593ARL2BK-B
	Black	1593ARL2GY-B
	Grey	1593ARL2TBU-B
1593HAMAR UNO PANEL KIT (FRONT & REAR PANEL)	Translucent Blue	1593ARL3BK-B
	Black	1593ARL3GY-B
	Grey	1593ARL3TBU-B
1593HAMAR YUN PANEL KIT (FRONT & REAR PANEL)	Translucent Blue	1593ARL4BK-B
	Black	1593ARL4GY-B
	Grey	1593ARL4TBU-B
1593HAMAR LEO/M0 PRO PANEL KIT (FRONT & REAR PANEL)	Translucent Blue	1593ARL6BK-B
	Black	1593ARL6GY-B
	Grey	1593ARL6TBU-B

**HAMMOND
MANUFACTURING**
1593HAMAR
www.hammondmfg.com