



IDEAL NETWORKS

More than a qualifier



NOW WITH
TOUCHSCREEN



SignalTEK NT

Copper and Fibre Network Transmission Tester


Proof of Performance

SignalTEK NT


Network Transmission Tester More than a qualifier



No calibration required plus
replaceable RJ45 contacts



CCTV video fail - 11% data loss



Wiremap test displaying
open and short

If you install, maintain or troubleshoot data cabling and Ethernet networks, SignalTEK NT allows you to prove the performance up to Gigabit Ethernet transmission rates.

By simulating actual network traffic users are able to test and document network and data cable performance to Gigabit Ethernet standards.

Where system warranties are not required the SignalTEK NT is a cost effective way of proving your copper and fibre networks provide error-free performance.

Transmission testing proves real performance

There is no industry standard defining the testing requirements of cable qualifiers, consequently passing a qualification test does not prove that the installed structured cabling will provide flawless data transmission.

Uniquely, SignalTEK NT utilises a test method known in wide area networks as transmission testing to prove the performance of a network by sending real Ethernet data frames through the cabling and/or network devices to compare the error rate against the IEEE802.3ab Gigabit Ethernet standard. This provides a clear standards based Pass/Fail of the link being tested.

SignalTEK NT requires no configuration from the user as the two handsets automatically pair ready for testing; just select a usage scenario to simulate the appropriate service, from VoIP to CCTV, Video, and web traffic.

Installation testing

Cabling:

- Network traffic performance test on copper and fibre to IEEE802.3ab standard
- Wiremap test for open, shorts, miswires and split pairs to TIA-568 standard
- Gigabit link verification for copper and fibre cabling
- Use a list of wiremap templates for common Ethernet cable types including CAT 6A/7A/8, and non-Ethernet cable, such as Profinet and ISDN.

Active network:

- Network load testing through switches simulating CCTV/IPTV/VoIP/Web traffic
- PoE/PoE+ verification that displays available voltage at device location
- Check Ethernet connectivity at device location to 10/100/1000 Mb/s
- Verify network configuration (device IP/gateway address/subnet mask)
- Switch port identification via LLDP/CDP protocols

Troubleshooting/diagnostics

Cabling:

- Distance to fault using TDR technology (copper only)
- Ability to identify and trace cables with a compatible amplifier probe (62-164)
- Optical power indication (with compatible SFP modules)

Active network:

- Network load testing through switches simulating CCTV/IPTV/VoIP/Web traffic
- Stress test network before installing bandwidth hungry devices
- Port blink to visually trace cable from work area outlet to network switch
- Displays port ID of LLDP/CDP enabled switches to eliminate manual cable tracing
- Identify network connection problems as hardware, network or configuration faults
- Ping local network devices and Internet URL's
- Count number of hops between network points with traceroute tests
- PoE load testing to confirm available power meets PoE device requirements

Send test reports from anywhere using the free app



IDEAL
AnyWARE



Step 1

Test



- Create job folder
- Enter job site information
- Perform autotest on copper/fibre cabling and copper/fibre networks



Step 2

Connect

- Activate SignalTEK NT wireless hotspot
- Connect your mobile phone or tablet with the IDEAL AnyWARE App
- Transfer test reports to your mobile device
- View test reports

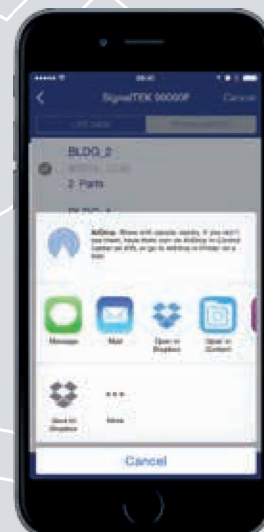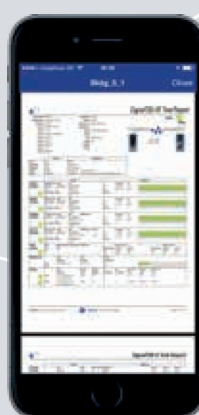

Step 3

Send

- Select reports (PDF or CSV) to send
- Select preferred transfer method – email, ftp, cloud storage etc.
- Send file
- Alternatively save test reports to USB key

Download the FREE App today



Network Performance Test


- Port speed 10/100/1000
- PoE/PoE+ detection
- Web data performance
- IP video performance
- IP CCTV performance
- VoIP performance



Router



Internet/WAN

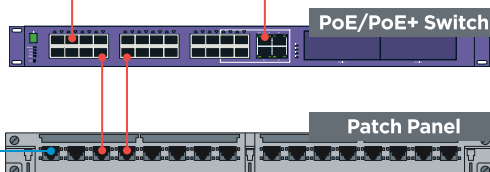

PoE/PoE+ Switch

Patch Panel



Network performance remote



Cable performance remote



Cable Performance Test

- TDR wiremap
- IEEE 802.3ab Gigabit data
- Custom wiremap for non-Ethernet cabling such as Profinet

Active LAN Links
Inactive Data Cable

Network diagnostics & troubleshooting

- Network speed 10/100/1000
- Network IP/DHCP configuration
- CDP/LLDP port identification
- PoE/PoE+ detection/load test
- Ping/trace route
- Blink switch link LED



IP Phone



Wireless AP



IP Camera

SignalTEK NT

Network Transmission Tester

More than a qualifier

Test Reporting

SignalTEK NT automatically generates test reports in PDF or CSV format.

The summary page of each report can be customised to include logo, company and operator details. Choose between 3 different reports that can show either passed, failed or all test reports in each report:

- Summary
- Brief
- Full (see example on the right side)

Ordering Information

Part No.	Kit Contents
R156005	SignalTEK NT – Network Transmission Tester. Includes 1 x display with touchscreen, 1 x remote, 2 x NiMH batteries, 2 x patch cables - 30cm, Cat 5e STP, 2 x power supply with EU/UK/US adapters, 1 x USB Wi-Fi adapter, 1 x quick reference guide, 1 x carry case

For the copper only version without network troubleshooting, please check out our SignalTEK CT

Optional Accessories

Part No.	Description
MGKSX1	1 x 1000BASE-SX Fibre kit*. Includes 850nm SFP (Small Form factor Pluggable) SX transceiver, LC/LC and LC/SC duplex multimode cables and SC/SC duplex adapter
MGKLX2	1 x 1000BASE-LX Fibre kit*. Includes 1310nm SFP (Small Form factor Pluggable) LX transceiver, LC/LC and LC/SC duplex singlemode cables and SC/SC duplex adapter
MGKZX3	1x 1000BASE-ZX Fibre kit*. Includes 1550nm SFP (Small Form factor Pluggable) ZX transceiver, LC/LC and LC/SC duplex singlemode cables and SC/SC duplex adapter
62-164	1 x IDEAL amplifier probe
150058	1 x RJ45 insert extraction tool, 10 x lifejack RJ45 inserts

For replacement accessories, please visit our website.

*2 required for Gigabit transmission testing.

Basic Specifications

Max. No. of Jobs	Max. No. of Stored Test	Max. Length	Battery Life	Dimensions per handset in mm	Weight per handset
50	5000	181 m/593 ft.	5 hours	175 x 80 x 40	0.4 kg

For detailed specifications, please visit our website.



Company		SignalTEK NT Test Report	
Company Name		Company Name	
Date Tested: 10/10/2013		Company: 10/10/2013	
Time Tested: 10:10:10		Address: 10/10/2013	
Info 1: 10/10/2013		Info 2: 10/10/2013	
Info 3: 10/10/2013		Info 4: 10/10/2013	
Info 5: 10/10/2013		Info 6: 10/10/2013	
Info 7: 10/10/2013		Info 8: 10/10/2013	
Info 9: 10/10/2013		Info 10: 10/10/2013	
Info 11: 10/10/2013		Info 12: 10/10/2013	
Info 13: 10/10/2013		Info 14: 10/10/2013	
Info 15: 10/10/2013		Info 16: 10/10/2013	
Info 17: 10/10/2013		Info 18: 10/10/2013	
Info 19: 10/10/2013		Info 20: 10/10/2013	
Info 21: 10/10/2013		Info 22: 10/10/2013	
Info 23: 10/10/2013		Info 24: 10/10/2013	
Info 25: 10/10/2013		Info 26: 10/10/2013	
Info 27: 10/10/2013		Info 28: 10/10/2013	
Info 29: 10/10/2013		Info 30: 10/10/2013	
Info 31: 10/10/2013		Info 32: 10/10/2013	
Info 33: 10/10/2013		Info 34: 10/10/2013	
Info 35: 10/10/2013		Info 36: 10/10/2013	
Info 37: 10/10/2013		Info 38: 10/10/2013	
Info 39: 10/10/2013		Info 40: 10/10/2013	
Info 41: 10/10/2013		Info 42: 10/10/2013	
Info 43: 10/10/2013		Info 44: 10/10/2013	
Info 45: 10/10/2013		Info 46: 10/10/2013	
Info 47: 10/10/2013		Info 48: 10/10/2013	
Info 49: 10/10/2013		Info 50: 10/10/2013	
Info 51: 10/10/2013		Info 52: 10/10/2013	
Info 53: 10/10/2013		Info 54: 10/10/2013	
Info 55: 10/10/2013		Info 56: 10/10/2013	
Info 57: 10/10/2013		Info 58: 10/10/2013	
Info 59: 10/10/2013		Info 60: 10/10/2013	
Info 61: 10/10/2013		Info 62: 10/10/2013	
Info 63: 10/10/2013		Info 64: 10/10/2013	
Info 65: 10/10/2013		Info 66: 10/10/2013	
Info 67: 10/10/2013		Info 68: 10/10/2013	
Info 69: 10/10/2013		Info 70: 10/10/2013	
Info 71: 10/10/2013		Info 72: 10/10/2013	
Info 73: 10/10/2013		Info 74: 10/10/2013	
Info 75: 10/10/2013		Info 76: 10/10/2013	
Info 77: 10/10/2013		Info 78: 10/10/2013	
Info 79: 10/10/2013		Info 80: 10/10/2013	
Info 81: 10/10/2013		Info 82: 10/10/2013	
Info 83: 10/10/2013		Info 84: 10/10/2013	
Info 85: 10/10/2013		Info 86: 10/10/2013	
Info 87: 10/10/2013		Info 88: 10/10/2013	
Info 89: 10/10/2013		Info 90: 10/10/2013	
Info 91: 10/10/2013		Info 92: 10/10/2013	
Info 93: 10/10/2013		Info 94: 10/10/2013	
Info 95: 10/10/2013		Info 96: 10/10/2013	
Info 97: 10/10/2013		Info 98: 10/10/2013	
Info 99: 10/10/2013		Info 100: 10/10/2013	



IDEAL NETWORKS

Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

All Rights Reserved. IDEAL, IDEAL NETWORKS and the SignalTEK logos are trademarks or registered trademarks of IDEAL INDUSTRIES, INC.

IDEAL INDUSTRIES Networks Ltd.
Stokenchurch House, Oxford Road, Stokenchurch,
High Wycombe, Bucks, HP14 3SX, UK.

Tel. +44 (0)1925 428 380 | Fax. +44 (0)1925 428 381
uksales@idealnwd.com

www.idealnetworks.net



A subsidiary of
IDEAL INDUSTRIES INC.



Specification subject to change
without notice. E&OE
© IDEAL Networks 2018
Publications no: 156884, Rev. 2