



RoHS Compliant

REV	ECN NO.	DESCRIPTION	DATE
A0		INITIAL RELEASE	2015-08-10

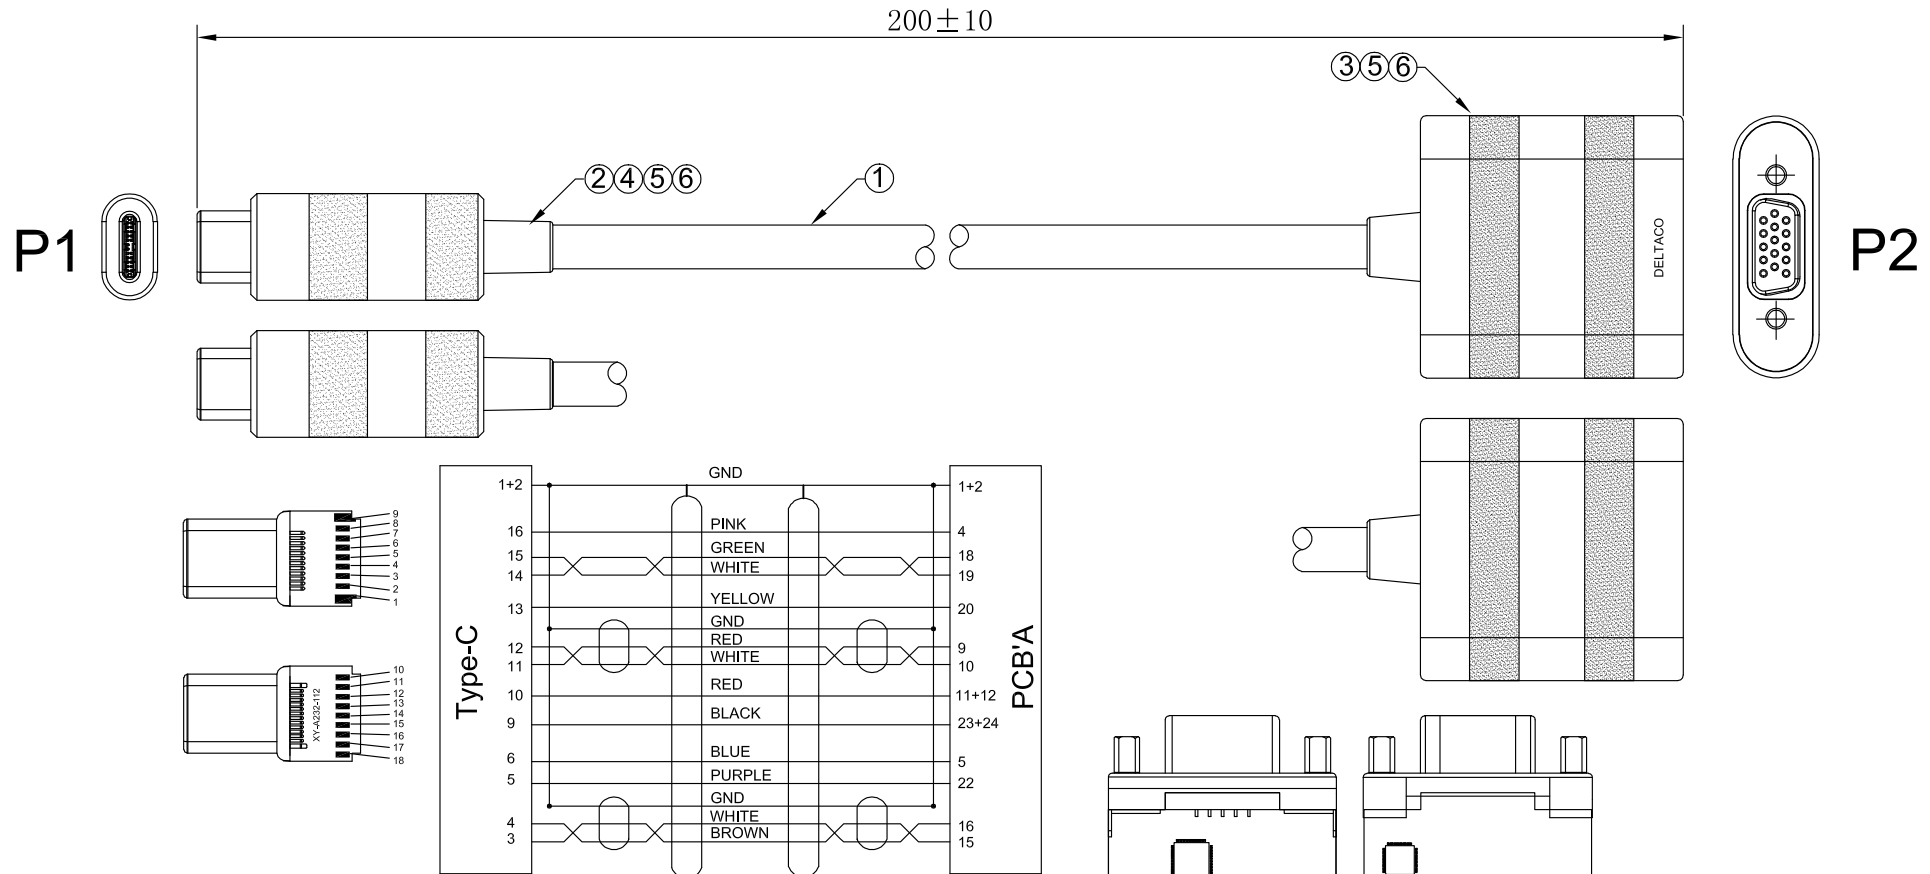

6	H. S. T	AM-TG0004	heat-shrinkable tube, Black, Φ1.0*ℓ=8mm	2 Pcs
5	external modle	PVC-0001	60P PVC Black	2.00g
4	Inner modle	PVC-0007	45P PVC Black	2.00g
3	trestle	OR-0170	VGA F Black lower cover	1 Pcs
		OR-0169	VGA F Black top cover	1 Pcs
	Shell	SL-BK0785	VGA F Black front cover	1 Pcs
		SL-BK0907	VGA, DVI, HDMI Black Shell (mark: DELTACO, PANTONE: Cool Gray 11C)	1 Pcs
	Clamp	OR-0192	TYPE-C/M Cable clamp	1 Pcs
	CONN	XY-C390-112-G	Type-C TO VGA F (Blue plastic)+PCB' A, Gold Plated	1 Pcs
2	Shell	SL-BK0863	Type-C/M Black Shell, tail-hole Φ5.2	1 Pcs
	CONN	XY-A232-113-G	Type-C/M (Black plastic)+PCB' A, Gold Plated	1 Pcs
1	CABLE	CB151-38-28189	UL2725 (34AWG*1P+D+AL+HM)*4C+32AWG*1P+34AWG*4C+28AWG*1C+26AWG*1C+F+D+AL, JACKET PVC Black. OD=3.8+0.05/-0.20mm	180mm
NO.	Material	P/N	Specifications Description	Quantity

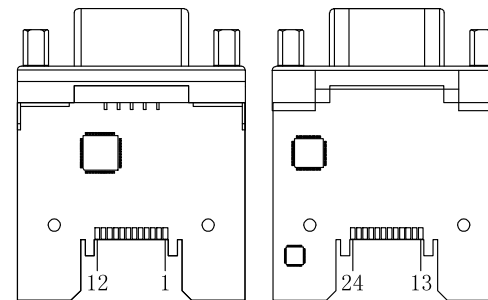

Testing requirement:
Video test OK at 3840*2160/60Hz.

图号 (DWG NO)	XY-A2413	单位(UNIT) MM		
版次 (REV)	A0	比例(SCALE) free		
页次 (PAGE)	1/1			
设计 (DESIGN)	Sunny	未 注 公 差 TOLERANCE UNSPECIFIED X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05 X" ± 5" X.X" ± 2"	Description	Type-C/M to VGA Cable
审核 (CHECKED)			PART NO	USBC-1098
核准 (APPROVED)				