



FEMALE PLUG M12 90° ANGLED

NOTES:
RATED VOLTAGE: 3, 4 contacts 250V
5 contacts 60V
8 contacts 30V
RATED CURRENT: 3, 4, 5 contacts 4A
8 contacts 2A
TEMPERATURE: SEE CABLE INFORMATION
INSULATION RESISTANCE: 10⁸ Ω MIN.
MATING CYCLES: MIN. 100
ENVIRONMENTAL:PROTECTION: IP67 IN MATED AND LOCKED POSITION

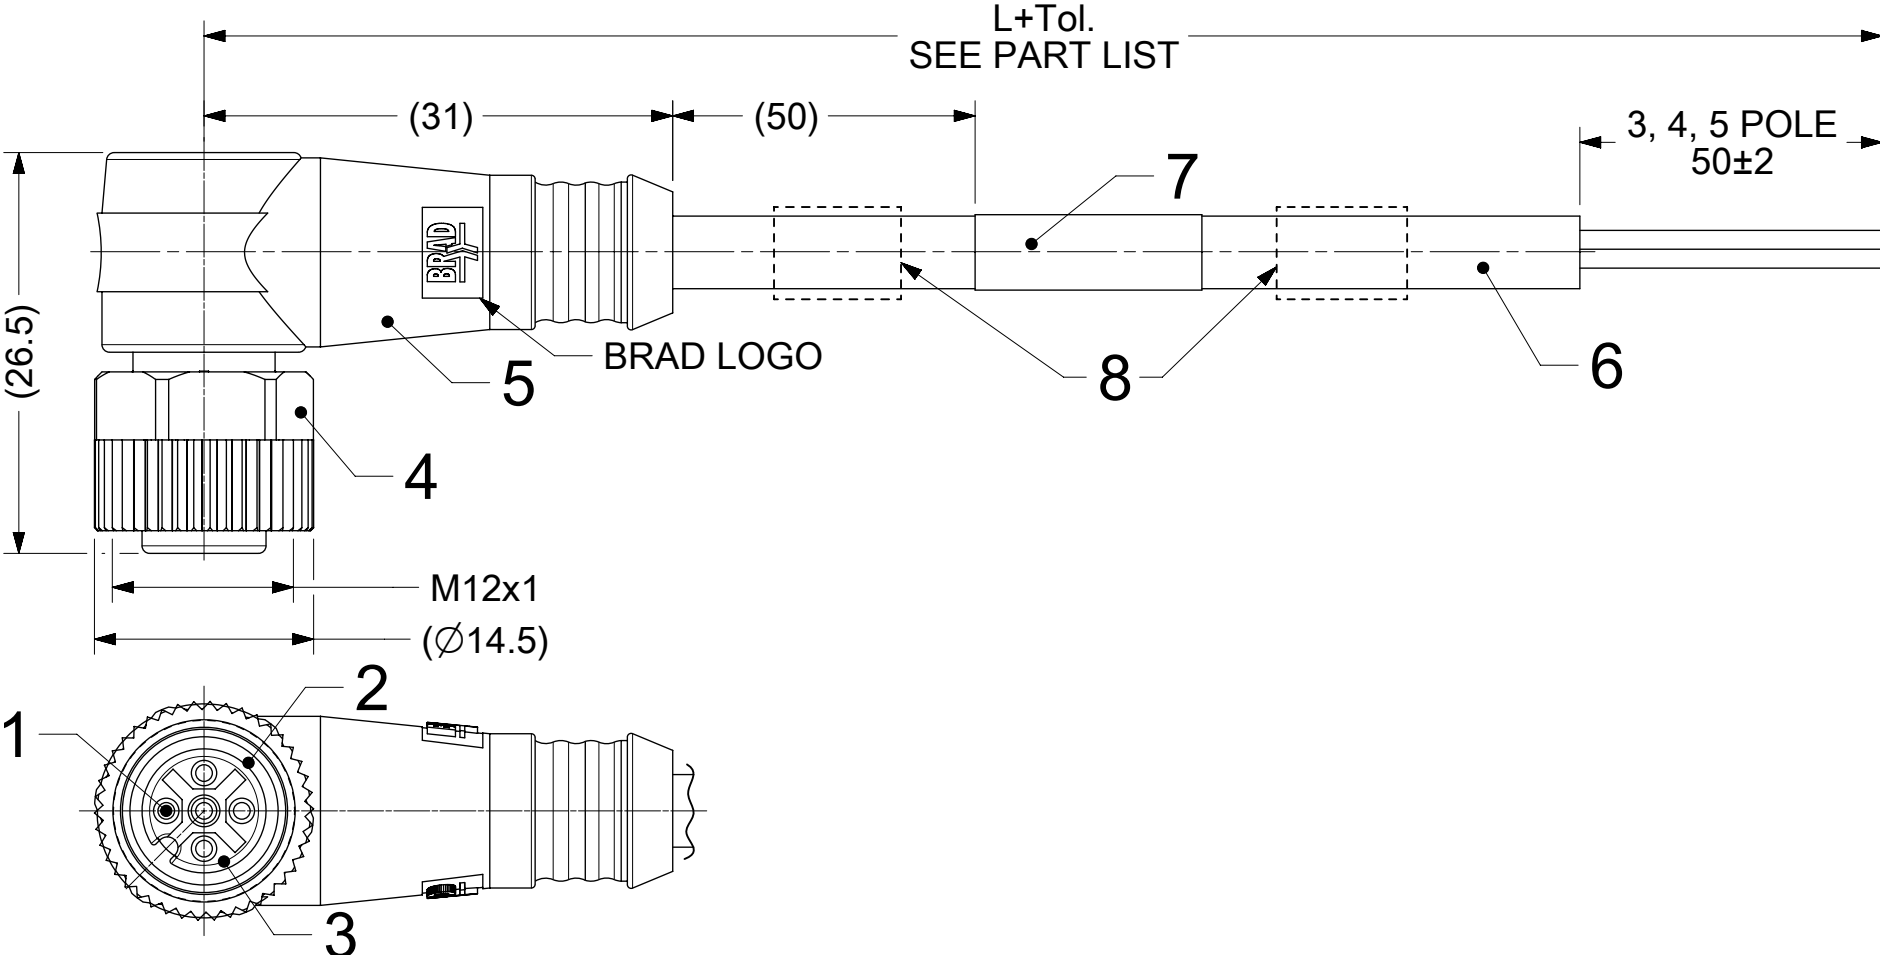

Thicker Overmold for Cables with bigger Outer Diameter (Ø>6)

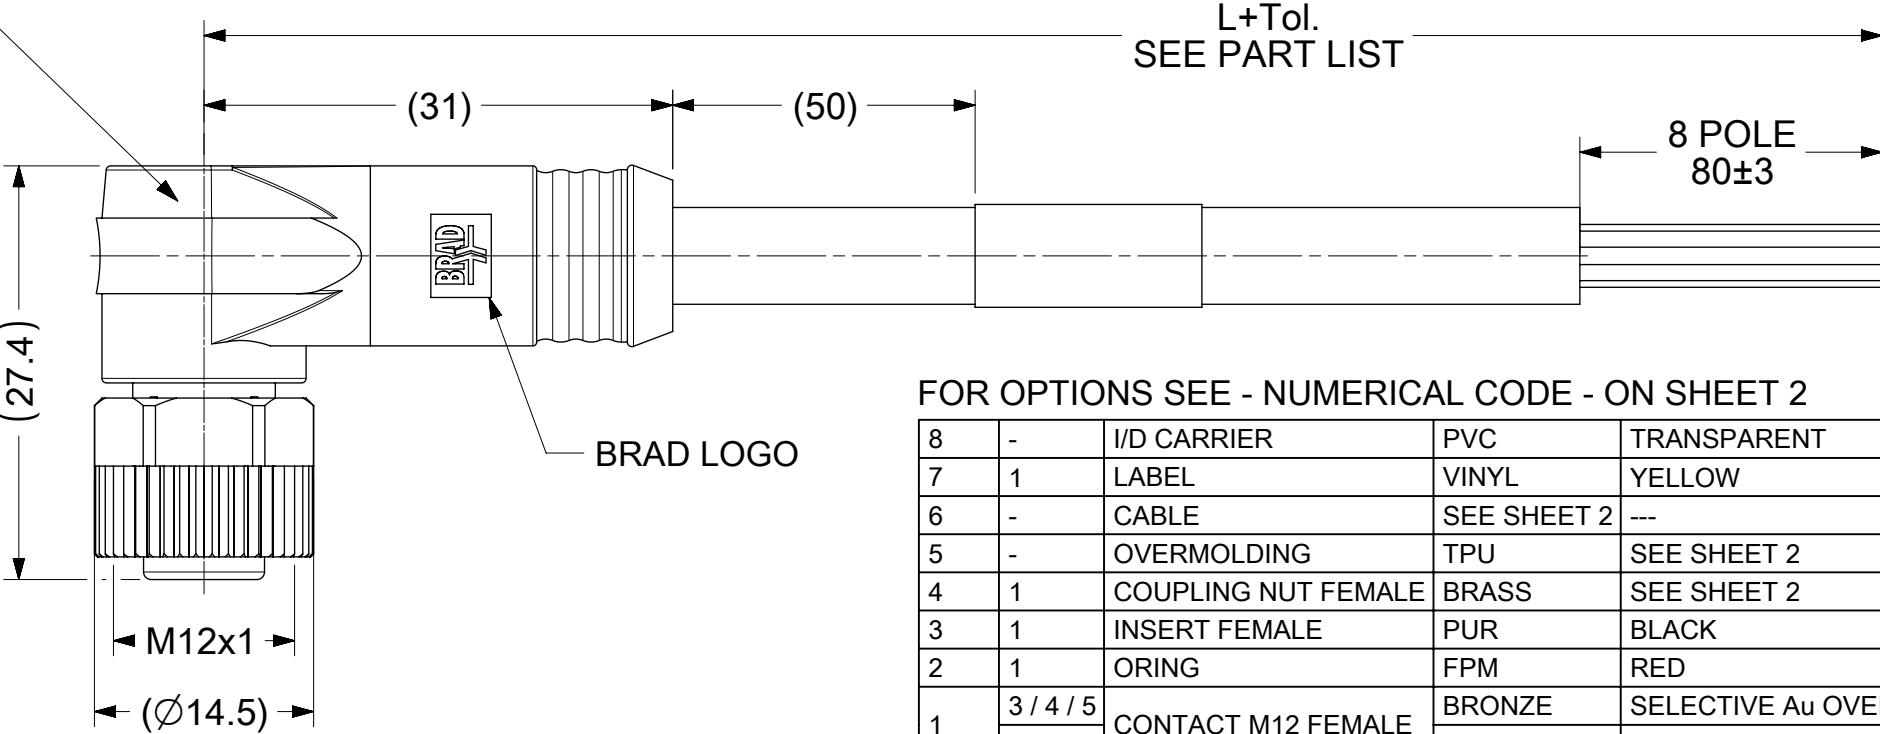

CONTACTS POSITION FRONT VIEW:

3 CONTACTS		4 CONTACTS		5 CONTACTS		8 CONTACTS	
PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE
1	BROWN	1	BROWN	1	BROWN	1	WHITE
2	---	2	WHITE	2	WHITE	2	BROWN
3	BLUE	3	BLUE	3	BLUE	3	GREEN
4	BLACK	4	BLACK	4	BLACK	4	YELLOW
5	---	5	---	5	GREY OR GREEN/YELLOW	5	GREY
						6	PINK
						7	BLUE
						8	RED

CODING REQUIRED TO IEC 61076-2-101

DOCUMENT STATUS	P1	RELEASE DATE	2024/10/15	11:44:50
-----------------	----	--------------	------------	----------

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

8	-	I/D CARRIER	PVC	TRANSPARENT
7	1	LABEL	VINYL	YELLOW
6	-	CABLE	SEE SHEET 2	---
5	-	OVERMOLDING	TPU	SEE SHEET 2
4	1	COUPLING NUT FEMALE	BRASS	SEE SHEET 2
3	1	INSERT FEMALE	PUR	BLACK
2	1	ORING	FPM	RED
1	3 / 4 / 5	CONTACT M12 FEMALE	BRONZE	SELECTIVE Au OVER Ni
	8		BRASS	SELECTIVE Au OVER Ni
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH / COLOR

FUNCTIONAL SYMBOLS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

EC NO: 801127

DRWN: RSCHIEBER

CHK'D: RSILLER

APPR: RSILLER

INITIAL REVISION:

DRWN: SSM

APPR: RSILLER

THIRD ANGLE PROJECTION

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

2:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 1.0 °

4 PLACES ±

3 PLACES ±

2 PLACES ± 0.05

1 PLACE ± 0.3

0 PLACES ± 0.5

CURRENT REV DESC: CABLE B02 INFORMATION ADDED TO THE TABLE, NEW PN'S ADDED TO THE PART LIST

2024/10/14

2024/10/15

2024/10/15

2021/12/13

2022/02/28

2024/10/15

2024/10/15

moLEX

CSE M12 XP AC FE RA XM SE UNSH

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER

1200656607

DOC TYPE

PSD

DOC PART

000

REVISION

B1

MATERIAL NUMBER

SEE SHEET 3

CUSTOMER

GENERAL MARKET

SHEET NUMBER

1 OF 3

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Others on request).

8	0	X	0	0	1	X	X	X	X	X	X	X	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---

80=M12x1
Single ended

Contacts:
3=3 Contacts
4=4 Contacts
5=5 Contacts
8=8 Contacts

Heads style: 001=Plug Female 90° Angled

Cable type: See Table



Units:
M=Meter

Length
Examples:
005=0.5 unit
010=1 unit
100=10 units

OVERMOLD COLOR:
BLANK (STANDARD)= BLACK
Y= YELLOW, A= GREY,
G= BLACK, R= RED

COUPLING NUT:
BLANK (STANDARD)= KNURLED -
/HEX BRASS, Ni PLATED
7 = KNURLED BRASS, Ni PLATED,
TEFLON COATED _____
5 = KNURLED DERLIN _____

H = 2 pcs. of I/D Carrier
PVC Transparent
(Cables B36 always with
2 pcs. I/D Carrier)



CABLE INFORMATION (for more information see Cable Data Sheet).

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN TESTED	OTHER	CABLE SPEC DRAWING
B30	3 / 4 / 5	0.34mm²	TPU BLACK	STYLE 21215	YES	-40°C to +90°C, 5xO.D.	-25°C to +80°C, 7.5xO.D.	5 MIO CYCLES	WELD SLAG RESISTANCE	SD-120209-00
B42	5									SD-120209-00
B41	8	0.25mm²	TPU ORANGE							SD-120209-00
B36	4	0.34mm²								SD-120209-00
B33	4 / 5	0.34mm²								SD-120209-00
B55	4 / 5	0.34mm²								1552200001 P
B02	4	0.75mm²	PUR YELLOW	STYLE 20549	YES	-	-	-	-	86-1842

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																
	DIMENSION UNITS		SCALE		CURRENT REV DESC: CABLE B02 INFORMATION ADDED TO THE TABLE, NEW PN'S ADDED TO THE PART LIST				molex								
	mm		1:1														
	GENERAL TOLERANCES (UNLESS SPECIFIED)								CSE M12 XP AC FE RA XM SE UNSH								
ANGULAR TOL ± 1.0°																	
DIVISIONAL SYMBOLS	4 PLACES		±		EC NO: 801127				PRODUCT CUSTOMER DRAWING								
	3 PLACES		±		DRWN: RSCHIEBER 2024/10/14												
	2 PLACES		± 0.05		CHK'D: RSILLER 2024/10/15												
	1 PLACE		± 0.3		APPR: RSILLER 2024/10/15												
	0 PLACES		± 0.5		INITIAL REVISION:				DOCUMENT NUMBER 1200656607								
					DRWN: SSM 2021/12/13 APPR: RSILLER 2022/02/28										DOC TYPE PSD		DOC PART 000
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION 				DRAWING A3-SIZE		SERIES 120065		MATERIAL NUMBER SEE SHEET 3		CUSTOMER GENERAL MARKET		SHEET NUMBER 2 OF 3	

F

EDBA

10

10

10