

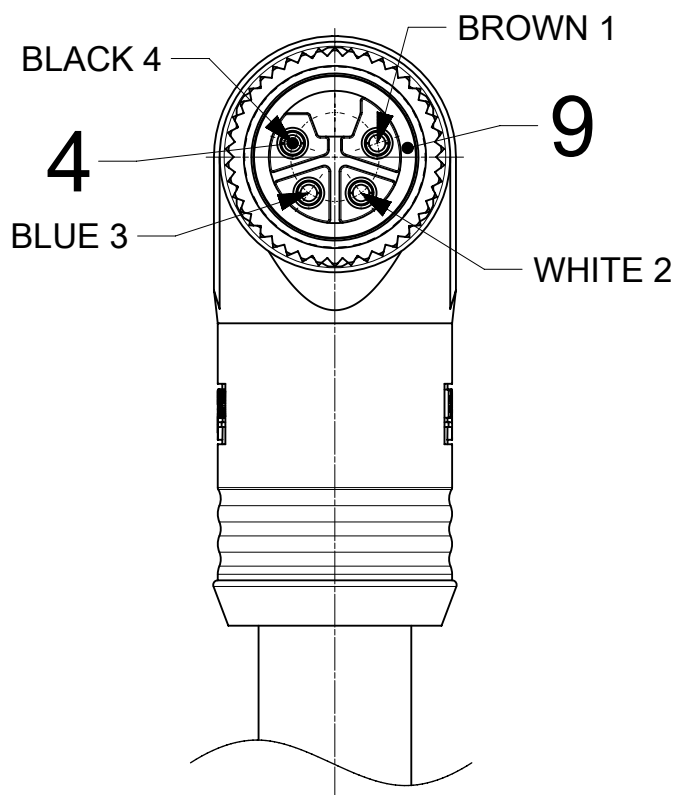
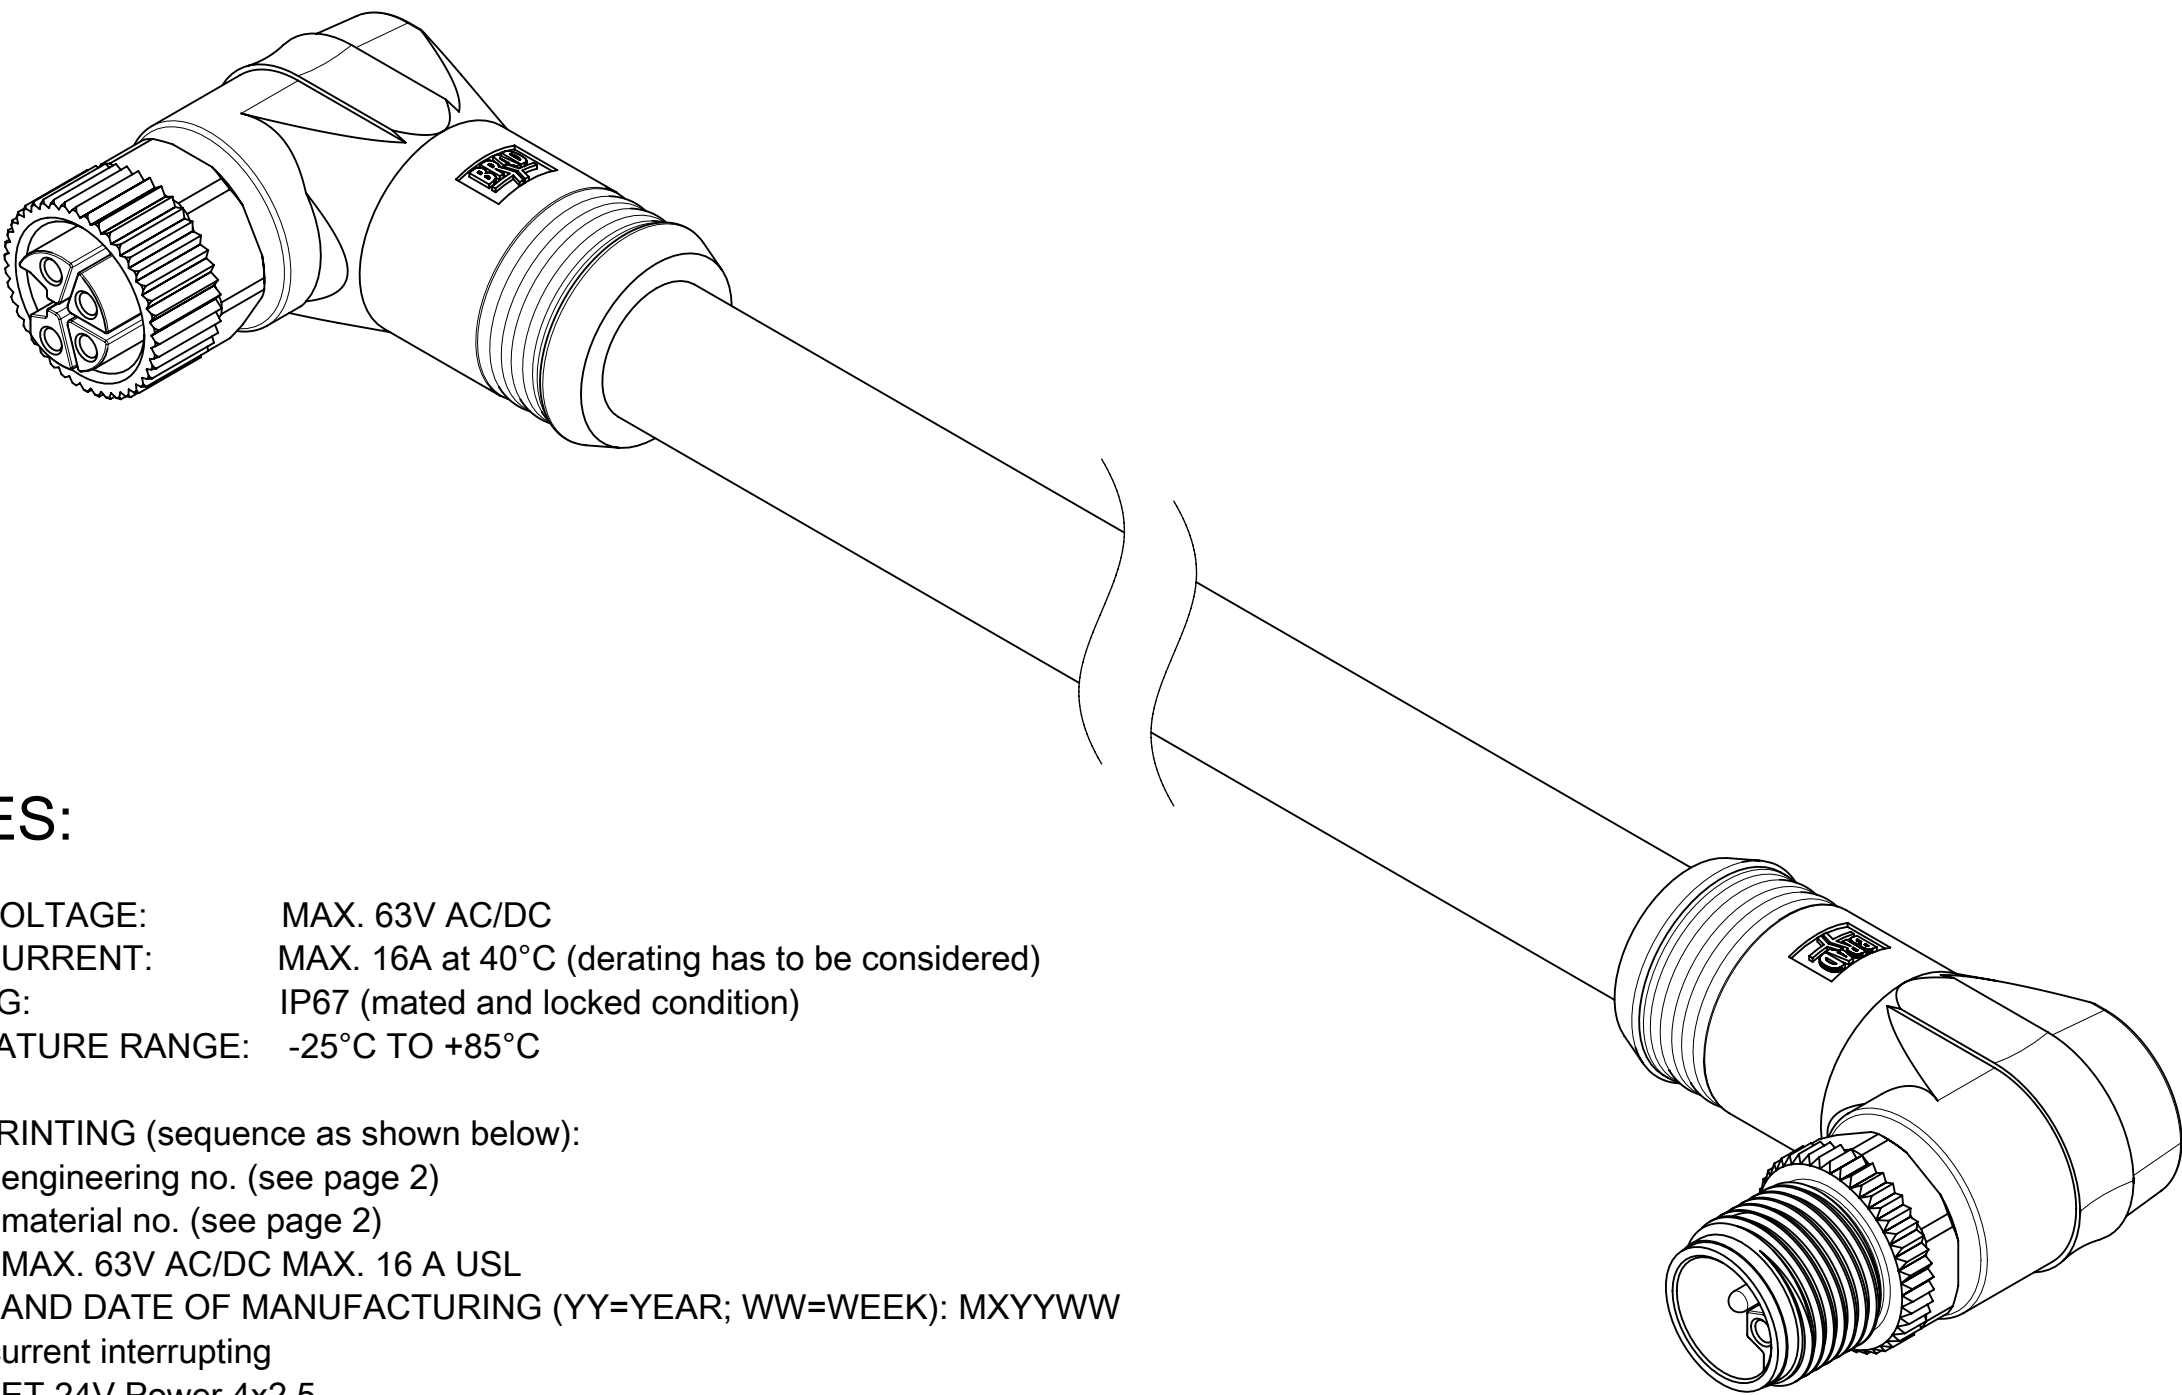


MATING SIDE
FEMALE CONNECTOR

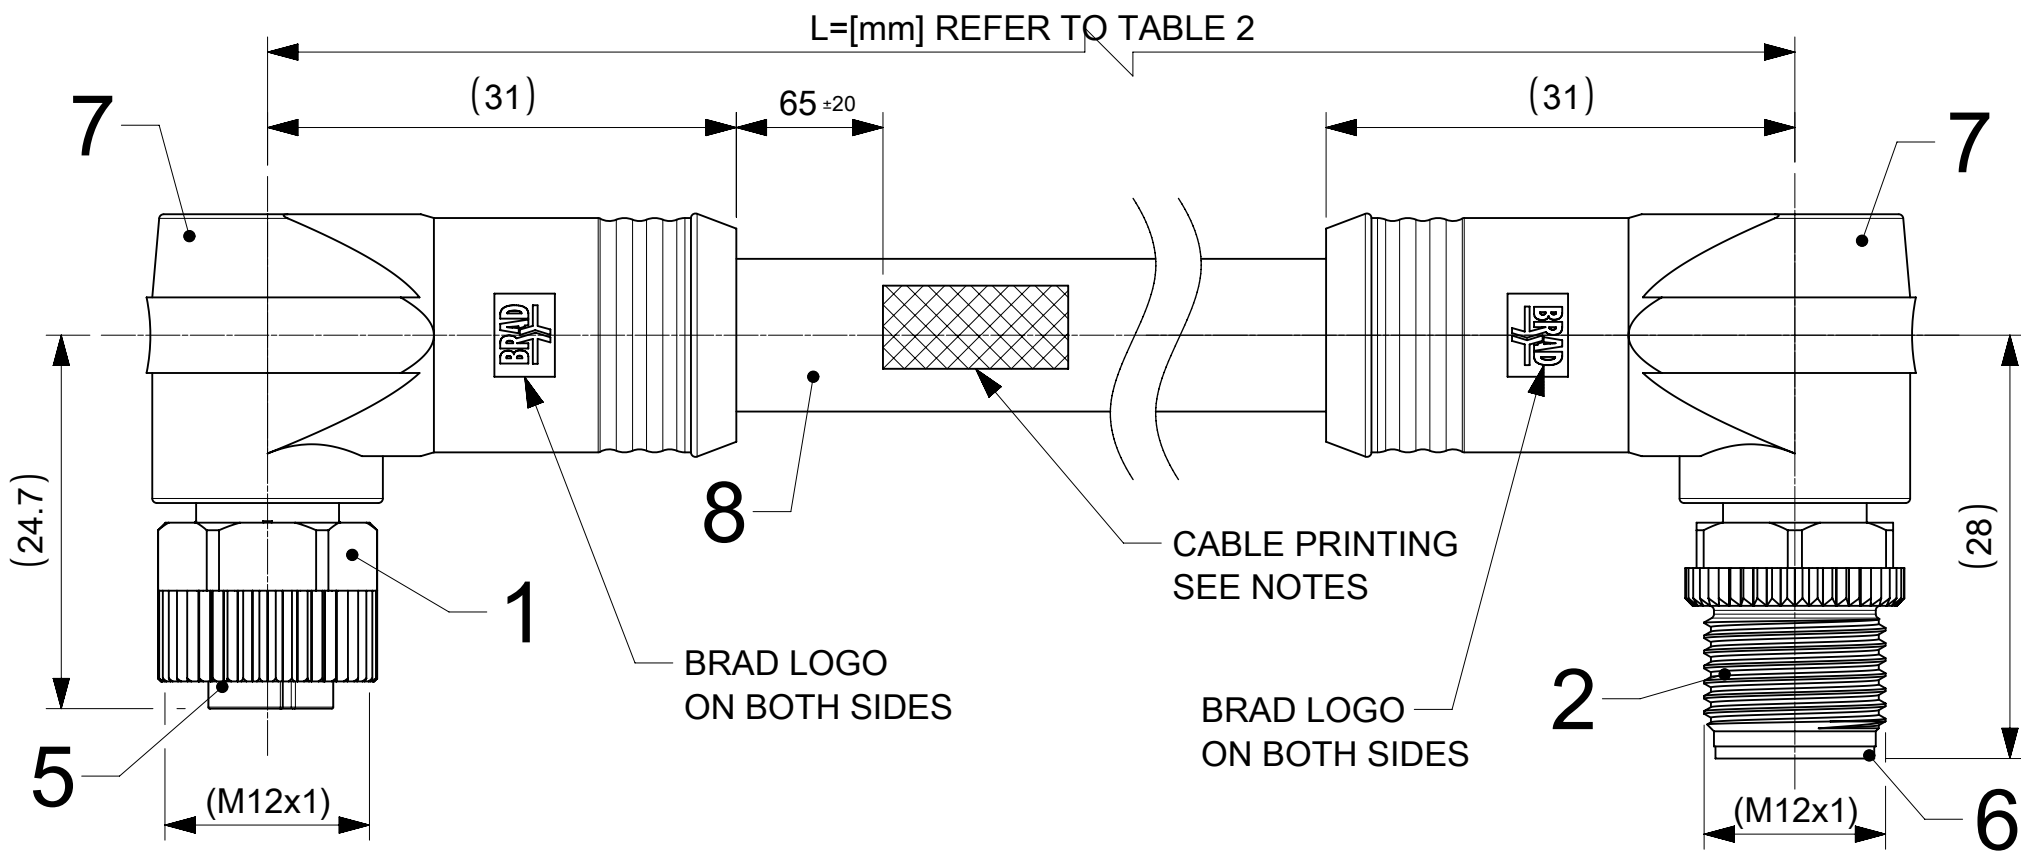

MATING SIDE
MALE CONNECTOR

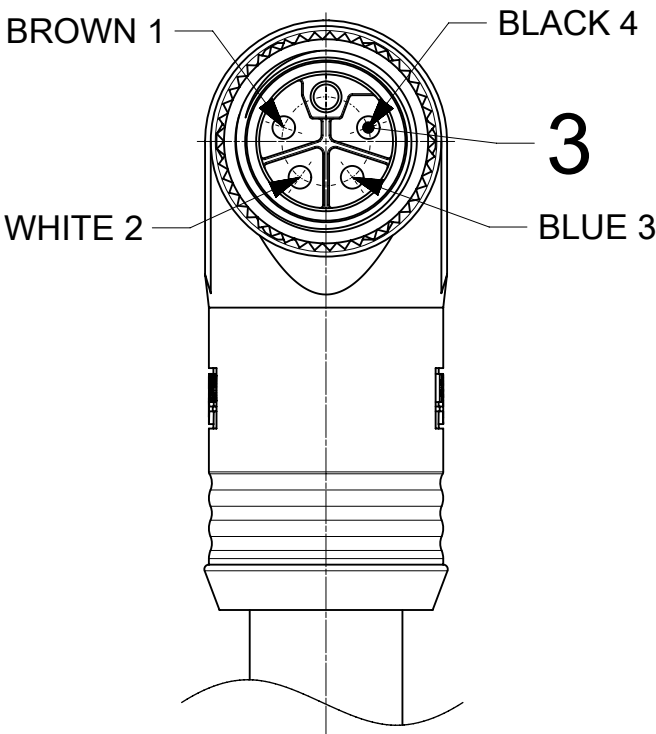

NOTES:

- RATED VOLTAGE: MAX. 63V AC/DC
RATED CURRENT: MAX. 16A at 40°C (derating has to be considered)
IP RATING: IP67 (mated and locked condition)
TEMPERATURE RANGE: -25°C TO +85°C
- CABLE PRINTING (sequence as shown below):
- MOLEX engineering no. (see page 2)
- MOLEX material no. (see page 2)
- MOLEX MAX. 63V AC/DC MAX. 16 A USL
- MOLEX AND DATE OF MANUFACTURING (YY=YEAR; WW=WEEK): MXYWW
- Not for current interrupting
- PROFINET 24V Power 4x2,5

PART ACCORDING PRODUCT SPEC: 1205010169
PACKAGING ACCORDING PACKAGING SPEC: 1201202000

TABLE 1

POS	DESCRIPTION	MATERIAL	FINISH
1	NUT M12 FE	BRASS	Ni
2	NUT M12 MA	BRASS	Ni
3	CONTACT 15 MA	BRASS	Au
4	CONTACT 15 FE	BRASS	Au
5	INSERT FEMALE	PA	BLACK
6	INSERT MALE	PA	BLACK
7	OVERMOLD	TPE	BLACK
8	CABLE 4x2.5 D10.1 WSOR	PUR	BLACK
9	GASKET OR 8.2X1.25	FKM	BLACK
OPTIONAL 10	ID CARRIER	-	-

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
FUNCTIONAL SYMBOLS = 0 = 0 = 0 DIVISIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED ATTRIBUTE TO GENERAL MARKET IN ECTR EC NO: 735577 DRWN: NIKHIS3 2023/01/12 CHK'D: RSILLER 2023/01/19 APPR: RSILLER 2023/01/19 INITIAL REVISION: DRWN: FDAFERNER 2020/05/12 APPR: RSILLER 2021/10/05				molex CSE M12 4P LC FE RA MA RA WSOR BK XM						
	mm		2:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
	ANGULAR TOL ± 1.0 °														
	4 PLACES		±						PRODUCT CUSTOMER DRAWING						
	3 PLACES		±												
2 PLACES		± 0.05													
1 PLACE		± 0.3													
0 PLACES		± 0.5		DOCUMENT NUMBER				DOC TYPE		DOC PART		REVISION			
				1205010156				PSD		000		A1			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A2-SIZE		120501		SEE TABLE 2		GENERAL MARKET		1 OF 2	

ENGINEERING NO - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

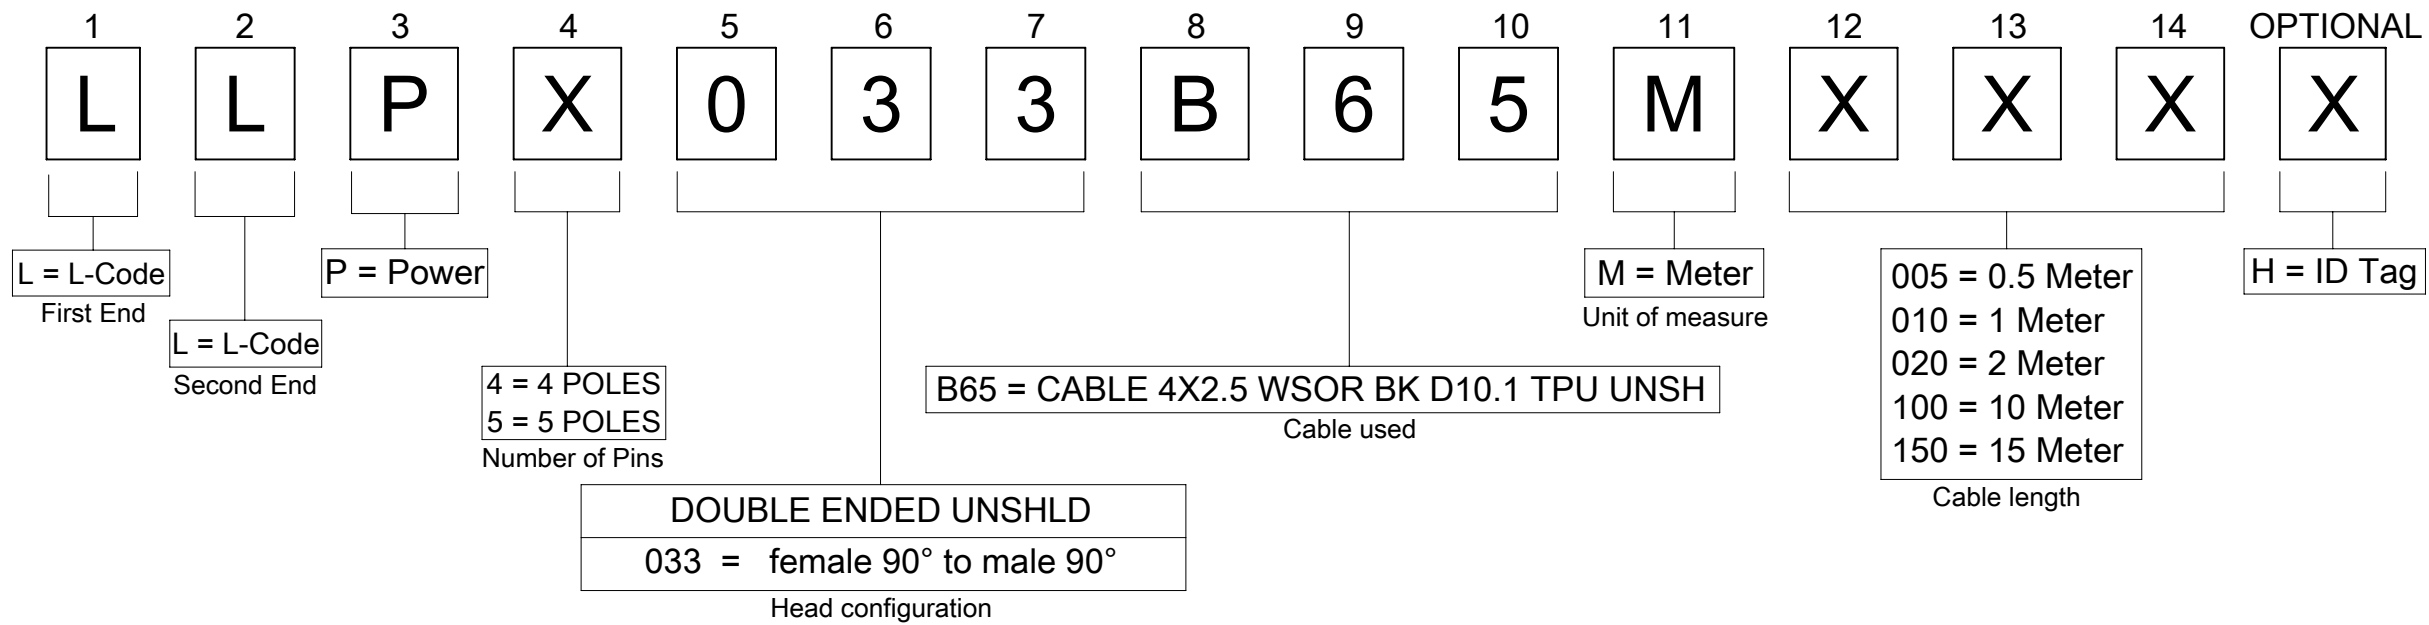


TABLE 2

NOMINAL SECTION 2,5mm ²			
MATERIAL NO.	ENGINEERING NO.	L [mm]	TOLERANCE [mm]
1205010156	LLP4033B65M005	500	+40
1205010157	LLP4033B65M010	1000	+40
1205010158	LLP4033B65M020	2000	+60
1205010159	LLP4033B65M030	3000	+60
1205010160	LLP4033B65M050	5000	+60
1205010161	LLP4033B65M100	10000	+80
1205010162	LLP4033B65M150	15000	+140
1205010163	LLP4033B65M200	20000	+140

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
	DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATED ATTRIBUTE TO GENERAL MARKET IN ECTR			molex								
	mm		1:1													
	GENERAL TOLERANCES (UNLESS SPECIFIED)															
	ANGULAR TOL ± 1.0°							EC NO: 735577			CSE M12 4P LC FE RA MA RA WSOR BK XM					
	4 PLACES		±		DRWN: NIKHIS3 2023/01/12											
	3 PLACES		±		CHK'D: RSILLER 2023/01/19											
	2 PLACES		± 0.05		APPR: RSILLER 2023/01/19			PRODUCT CUSTOMER DRAWING								
	1 PLACE		± 0.3		INITIAL REVISION: DRWN: FDAFERNER 2020/05/12 APPR: RSILLER 2021/10/05							DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
	0 PLACES		± 0.5					1205010156		PSD	000	A1				
DIVISIONAL SYMBOLS	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
							A3-SIZE		120501		SEE TABLE 2		GENERAL MARKET		2 OF 2	