


Identification cable tie longitudinal plate

Technical cable ties with longitudinal identification plate allow bundles and cabling to be easily marked and identified



TYPE 1

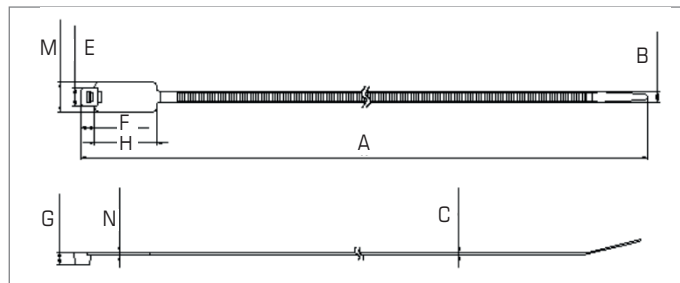

COLORS

● Natural

MATERIALS

Material: polyamide 6.6

Halogen free

Material flammability rating:

UL 94-V2

Excellent resistance to: aromatic solvents, oils, greases and derivatives

Good resistance to: bases

Limited resistance to: acids

Not resistant to: phenols and to chlorinated solvents

APPLICATION

Installation temperature:

-10°C ÷ 60°C

Working temperature:

-40°C ÷ 85°C

PRODUCTS CONFORMITY:

CE marking: our products comply with the Low Voltage Directive 2014/35/EU and the cable ties are tested in accordance with CEI EN IEC 62275 "Cable management system – Cable ties for electrical installations".

Type 1

REACH: the materials used to produce the cable ties comply with 1907/2006/CE (REACH)

Technical Data

CODE	NOMINAL DIMENSIONS									BUNDLE DIAMETER	
Natural	(mm) A	(mm) B	(mm) C	(mm) E	(mm) F	(mm) G	(mm) H	(mm) M	(mm) N	(mm) ø min	(mm) ø max
52190-M	190	4,8	1,4	7,9	5,9	5,5	27,2	13	1,1	15	50
52270-M	270	4,8	1,4	7,9	5,9	5,5	27,2	13	1,1	15	75

Mechanical features and packaging

CODE	MECHANICAL FEATURES	PACKAGING	
	Newton (N) Tensile strength	(pcs) Bag	(pcs) Box
52190-M	220	100	5.000
52270-M	220	100	4.000