


| PIN OUT |        |            |              |
|---------|--------|------------|--------------|
| CN1     | CN2    |            | COLOR        |
| 1       | 1      |            | WHITE/ORANGE |
| 2       | 2      |            | ORANGE       |
| 3       | 3      |            | WHITE/GREEN  |
| 6       | 6      |            | GREEN        |
| 4       | 4      |            | BLUE         |
| 5       | 5      |            | WHITE/BLUE   |
| 7       | 7      |            | WHITE/BROWN  |
| 8       | 8      |            | BROWN        |
| SHIELD  | SHIELD | DRAIN WIRE |              |

PAIR

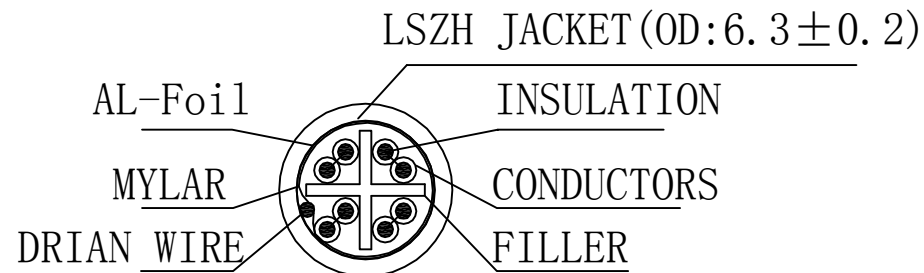

SECTION A-A

- 1.1 ALL COMPONENTS ARE RoHS COMPLIANT.
- 1.2 100% OPEN AND SHORT TEST.
- 1.3 ALL PRODUCTS PASS TIA CAT 6 CHANNEL TEST
- 1.4 TEMPERATURE RANGE:-20—+60℃

| ③   | MOLDING    | 2PCS  | RED PVC                                                             |
|-----|------------|-------|---------------------------------------------------------------------|
| ②   | CONNECTER  | 2PCS  | RJ45 (8P8C) MALE WITH METAL SHIELD(NICKEL PLATED), GOLD PLATED PINS |
| ①   | CABLE      | 1PCS  | 26AWG*4P+FILLER+MYLAR+DRAIN WIRE+AL-FOIL +RED LSZH JACKET           |
| NO. | PARTS NAME | Q' TY | SPECIFICATION                                                       |

| APPROVED | CHECKED | DRAWN | CUSTOMER: |         |
|----------|---------|-------|-----------|---------|
|          |         |       | ITEM NO.  | STP-60R |
|          |         |       | DRAW NO.  |         |
|          |         |       | UNIT      | mm      |
|          |         |       | SCALE     | NONE    |

DESCRIPTION:

RJ45 (8P8C) M/M, FTP, CAT6 0.5m

