


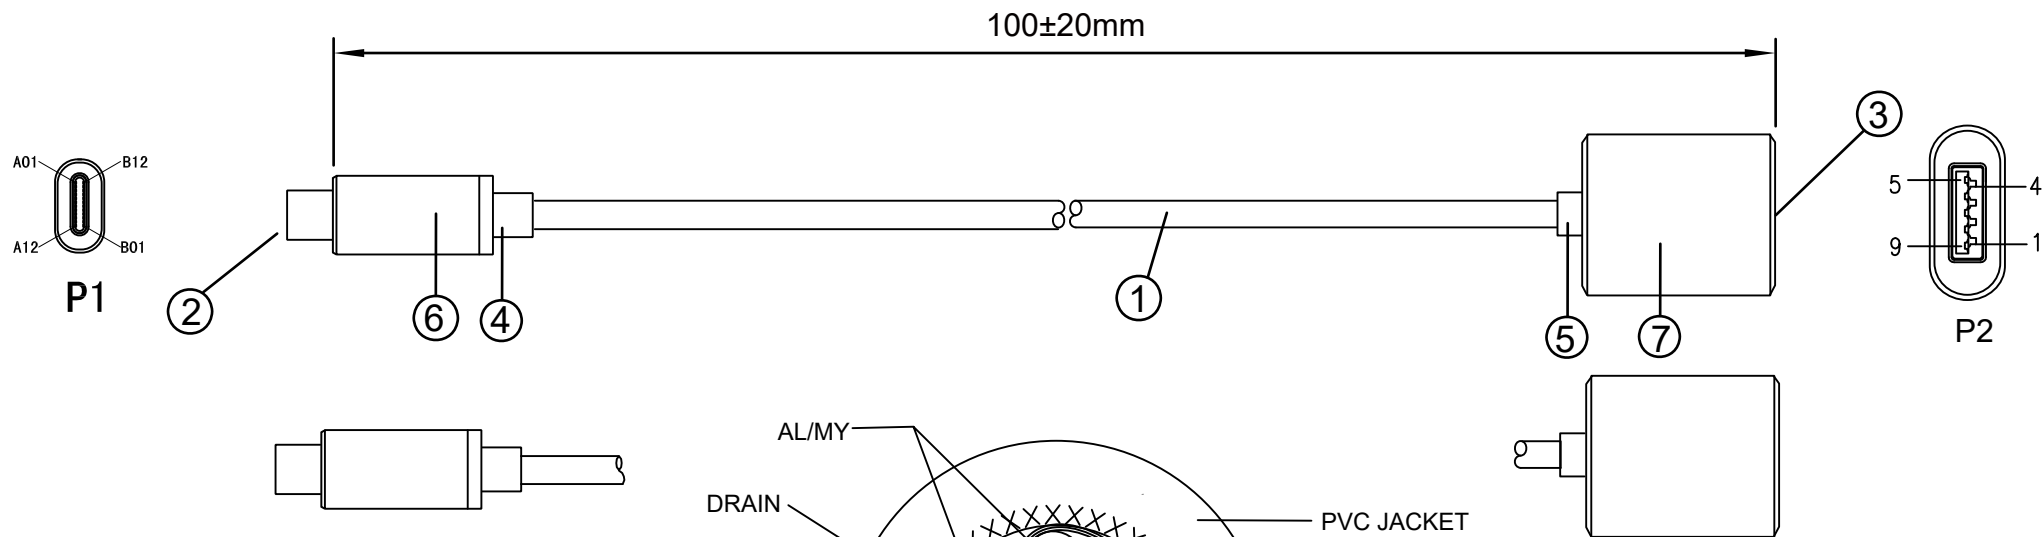

PIN ASSIGNMENT:

USB TYPE C (P1)	USB3.0 AF (P2)
A4,B4,A9,B9	1 VBUS
A7	2 data-
A6	3 data+
A1,B1,A12,B12	4 Gnd
A3	8 SSTX-
A2	9 SSTX+
A1,B1,A12,B12	7
B10	5 SSRX-
B11	6 SSRX+
SHELL	SHELL

NOTES:

1. TESTING :100% OPEN AND SHORT TEST.
2. ALL MATERIALS ARE ROHS COMPLIANT

⑦	SHELL	1PCS	SILVERY ALUMINIUM SHELL
⑥	SHELL	1PCS	SILVERY ALUMINIUM SHELL
⑤	HOOD MOLD	1PCS	SILVERY PVC
④	HOOD MOLD	1PCS	SILVERY PVC
③	USB3.0 A F	1PCS	NICKEL PLATED SHELL
②	USB3.1 TYPE C M	1PCS	NICKEL PLATED SHELL
①	CABLE	1PCS	(32AWG*1P+D+FAM)*2C+32AWG*1P+24AWG*2C+AEB OD:4.5±0.2mm SILVERY PVC JACKET SILVERY TEXTILE BRAID
NO.	PARTS NAME	Q'TY	SPECIFICATION

APPROVED	CHECKED	DRAWN	CUSTOMER	
			ITEM NO.	USBC-1278
			REV.	00
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

USB 3.1 GEN 1 3A ADAPTER CABLE
USB 3.1 TYPE C MALE / USB 3.0 A FEMALE

